

Duplex Copier | Laser Printer | Super G3 Fax

Canon

imageCLASS® MF7460



(shown with optional cabinet)

A Laser Multifunction for the Small Office.

- Up to 25 pages-per-minute laser output
- Duplex versatility — automatic two-sided copying, printing and faxing
- 1/4 VGA Touch Screen Panel
- Canon UFR II-LT language support
- 33.6 Kbps Super G3 fax with up to 1,000 pages of reception memory¹
- 2 x 250-sheet cassettes plus 80-sheet multipurpose tray
- 11" x 17" platen
- 50-sheet Automatic Document Feeder²
- USB 2.0 Hi-Speed³ for optimal performance
- Single Cartridge System

All the elements
you will ever
need in a digital
multitasking
machine.

The imageCLASS® MF7460 incorporates a rich array of input and output features that can greatly enhance your efficiency. Equipped with features that meet the needs of document work in a digitized office, the ImageCLASS® MF7460 represents the ultimate in digital multitasking machines.

The imageCLASS® MF7460 copies and prints at up to 25 pages-per-minute for high-quality letter-size documents. A large supply of paper can conveniently be utilized from either two 250-sheet front-loading paper cassettes or the 80-sheet multipurpose tray. The multipurpose tray can accommodate a variety of sizes and types of paper stock such as bond, plain and color paper, transparencies, labels and envelopes for special projects.

Use the 11.75" x 17" platen glass for single-page originals or to copy 2 letter-size originals on to one 11" x 17" sheet of paper. The 50-sheet Duplex Automatic Document Feeder (DADF) allows for multi-page originals. The benefit of DADF is that it allows you to copy, and fax from one or two-sided originals and produce two-sided output.

Built for reliability and ease-of-use, the imageCLASS® MF7460, using Canon's exclusive Single Cartridge System, as well as years of fine-tuned copying and printing know-how, will attest to Canon's commitment to providing products with a level of quality and expertise that ensures your office runs effectively.

¹ Based on ITU-T #1 Chart (standard mode).

² Based on 20 lb. paper.


³ USB 2.0 Hi-Speed performance requires Windows®XP Service Pack 1 or Windows®2000 Service Pack 4 with pre-installed USB 2.0 port.

imageCLASS® MF7460



Control Panel

The control panel consists of a backlit touch screen display for setting various functions through a user friendly menu. The touch panel makes sophisticated functions simple and easy to use.

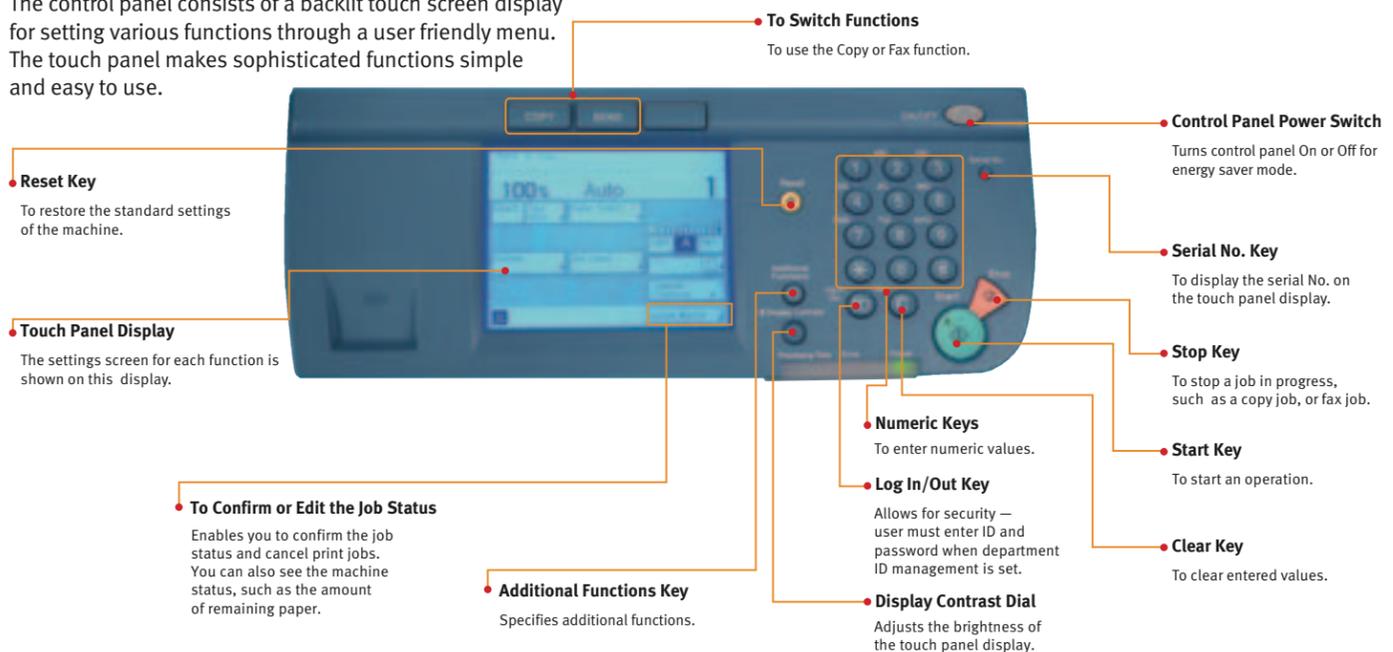

imageCLASS® MF7460

An array of powerful features

What You Can Do...

Enlarge/Reduce an Image to Copy to a Different Size Paper

This function is useful when enlarging or reducing an original of one standard paper size to another, such as enlarging a letter-sized original to legal size, or reducing legal to letter size. Simply select the desired paper size from the displayed keys to automatically set the optimal zoom ratio.

Make Two-Sided Copies

When copying many single-sided originals, printing on both the front and back sides of paper can help you save half of the paper costs.

Copy Multiple Originals onto One Sheet of Paper

This mode enables you to reduce multiple originals or two-sided originals to fit onto one sheet of paper. This is useful for arranging a variety of originals on one sheet of paper for easy viewing and for saving paper and space when storing printouts.

You Get the Big Picture

Double your productivity with an 11.75" x 17" platen. You can fit 2 letter-size (8.5" x 11") documents onto one side of an 11" x 17" sheet or four onto two sides.



Copy Function


Built on a copying platform, the imageCLASS MF7460 offers many convenient copy features. Standard features such as a 50-sheet Auto Document Feeder, 11" x 17" paper support, 580 total page capacity and high yield cartridge allows most copying jobs to flow without interruption. Convenient features such as duplexing allows two-sided copying and 2/4 in 1 allows you to fit two or four pages on one side of paper. The imageCLASS MF7460 also includes other features such as zoom from 50% to 200% in 1% increments, output collating, margin/frame erase and more!

Print Function

The imageCLASS MF7460 is a laser printer as well. With a total of 3 paper input sources, you can stock any combination of paper sizes and stock from envelopes up to 11" x 17" paper. The imageCLASS MF7460 utilizes Canon's Ultra-Fast Rendering (UFR II-LT) technology. Built-in two-sided printing also increases productivity, and saves paper.

Fax Function

Fax and receive documents with speed and ease. Documents will transmit with Super G3 (33.6 Kbps) modem speed, which keeps phone line costs down. With a host of convenient features like 200 One-Touch Dials, and 300 Coded Dials, and a generous 1,000 pages of incoming reception memory, faxing will be simple and effortless.

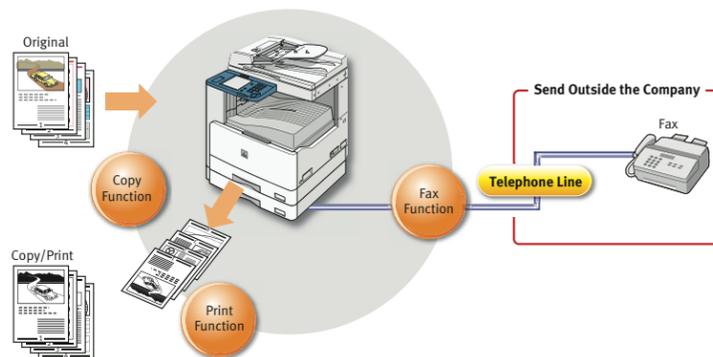

Canon Single Cartridge System

With one machine, you need to stock only **one** consumable for the many functions. Adding to the convenience is Canon's Single Cartridge System – the easy-to-replace cartridge that simplifies maintenance by combining the toner, drum and other moving parts into one unit. Every time you change the cartridge, you are also maintaining the machine, keeping it hassle-free. A full-yield cartridge is included, and for more peace of mind, the imageCLASS MF7460 also includes a 1 year limited warranty with on-site service.⁶



imageCLASS® MF7460

Technical Information

PAPER HANDLING (FOR ALL FUNCTIONS)

PAPER FEEDING SYSTEM	Paper Drawers: 250 sheets ¹ x 2 drawers Stack Bypass: 80 sheets ¹ (LTR/LTRR/STMT/STMTR/EXEC/A4/A4R/B5R/B5/A5R/A5) 50 sheets ¹ (LGL/11" x 17"/A3/B4) 50 sheets (transparencies/heavyweight paper, 24 lb to 32 lb bond), 10 envelopes, 1 sheet (labels)
PAPER SIZES	Paper Drawer: 11" x 17", LGL, LTR, LTRR, and STMT Stack Bypass: 11" x 17", LGL, LTR, LTRR, STMT, STMTR, EXEC, Irregular Size (3-3/4" x 5-7/8" to 11-3/4" x 17") and Envelopes (ISO-B5, ISO-C5, COM10, DL, and Monarch)
PAPER STOCK	Paper Drawer: 18 lb to 24 lb bond Plain, Recycled, Color, 3-hole punch, Heavy, Bond Stack Bypass: 18 lb to 32 lb bond Plain, Recycled, Color, 3-hole punch, Bond, Heavy, Transparencies, Labels, Envelopes (ISO-B5, ISO-C5, COM10, DL, and Monarch)
MAXIMUM ORIGINAL SIZE	Platen: Up to 11-3/4" x 17"; ADF: Up to 11" x 17"
OUTPUT CAPACITY, ORIENTATION	Up to 250 sheets ¹ , Face Down
SENDING ORIGINAL SIZES	11" x 17", LGL, LTR, LTRR, STMT, or STMTR
RECEIVING PAPER SIZES	11" x 17", LGL, LTR, LTRR, STMT, or STMTR

COPIER SPECIFICATIONS

DUPLEX COPY/BIND TYPE	1 to 1, 2 to 1, 2 to 2/Book, Calendar
COPIER TYPE	Desktop, Monochrome Laser
WARM-UP TIME	26 seconds maximum after powering ON. ²
FIRST COPY TIME	6.9 seconds ³
COPY SPEED (SHEETS PER MINUTE)	Up to 25 cpm (A4)
COPY RESOLUTION	Up to 600 X 600 dpi, 1200 x 600 dpi quality
NUMBER OF TONES	256 levels
REDUCTION/ENLARGEMENT	50%, 64%, 73%, 78% / 121%, 129%, 200%
ZOOM	50% - 200% in 1% increments
COPY FEATURES	2 in 1, 4 in 1, Collate
COPY MEMORY	256MB (shared)

PRINTER SPECIFICATIONS

DUPLEX PRINT	Yes
PRINTER TYPE	Monochrome Laser
PRINT RESOLUTION	Up to 1200 x 1200 dpi, 1200 x 1200 dpi quality
PRINT SPEED (SHEETS PER MINUTE)	Up to 25 cpm (A4)
PRINT LANGUAGES	Canon UFR II-LT
PRINT MEMORY	256MB (shared)
SYSTEM MEMORY (ON BOARD)	256MB (shared)

FAX/PC FAX SPECIFICATIONS

DUPLEX FAX	Yes (transmission/reception)
TELEPHONE LINE USED/ NUMBER OF LINES	Public Switched Telephone Network, 1 line
FAX RESOLUTION	Up to 203 x 391 dpi (super fine)
TRANSMISSION SPEED	Super G3: up to 33.6 Kbps
COMPRESSION METHOD	MH, MR, MMR, JBIG
TRANSMISSION TIMES	JBIG: Approximately 2.6 seconds ECM-MMR: Approximately 3.2 seconds G3MR method: Approximately 13 seconds G3MH method: Approximately 13 seconds
AUTO DIAL FUNCTION	Address Book: 300 destinations; One-touch buttons: 200 destinations
FAX MEMORY	Up to 1,000 pages ⁴
RECEIVE MODES	Fax only, Manual, Answering
FAX FEATURES	Relay, Delayed TX, Dual Access
MEMORY BACKUP	Yes (1 hour)

INTERFACE/SOFTWARE

STANDARD INTERFACE(S)	USB 2.0 Hi-Speed ⁵
OS COMPATIBILITY	Windows® Vista™, XP, 2000, Me, 98 and Mac® OS X 10.2.8 & up

GENERAL SPECIFICATIONS

DIMENSIONS	24.5"(W) x 26.3"(D) 29.8"(H)
WEIGHT	128 lbs. (58kg)
POWER SOURCE	120 V AC, 60 Hz, 4.6 A
MAX POWER CONSUMPTION	1,425W (max), 3.5W (Energy Saver Mode)
REPLACEMENT CONSUMABLE	Canon Cartridge 105
WARRANTY	1 year limited warranty with on-site service ⁶

ORDERING INFORMATION

PRODUCT	ITEM CODE
imageCLASS MF7460	2237B001AA
Cartridge 105 (yields 10,000 pages based on 5% coverage)	0265B001AA
imageCLASS MF7200/ MF7400 Cabinet	5709A006AA
imageCLASS MF7460 2-year Onsite Carepak	6521A033AA

Features and specifications are subject to change without notice.

For More Information Visit

www.usa.canon.com/consumer

For the name of the nearest dealer, call:

1-800-OK-CANON

Canon U.S.A., Inc. One Canon Plaza, Lake Success, NY 11042

1-800-OK-CANON

- Based on 20 lb. paper.
- Activation time may vary depending on the conditions under which the machine is being used. (In all cases, at a room temperature of 68°F (20°C))
- LTR, direct, paper drawer 1
- Based on ITU-T #1 Chart (standard mode).
- USB 2.0 Hi-Speed performance requires Windows®XP Service Pack 1 or Windows®2000 Service Pack 4 with pre-installed USB 2.0 port.
- Warranty program is subject to certain conditions and restrictions. See the warranty card for full details.



©2007 Canon U.S.A., Inc. Canon and imageCLASS are registered trademarks of Canon Inc. The Super G3 logo is a trademark of Canon Inc. imageANYWARE is a trademark of Canon U.S.A., Inc. Microsoft, Windows, the Windows logo and Windows Vista are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. The Mac logo, Mac OS, and Macintosh are trademarks of Apple Computer, Inc., registered in the United States and other countries. All other product and brand names are trademarks of their respective owners. Specifications are subject to change without notice. As an ENERGY STAR partner, Canon U.S.A., Inc. has determined that this product meets the ENERGY STAR guidelines for energy efficiency. The limited warranty given by Canon U.S.A., Inc. is for Canon imageCLASS MF7460 model purchased and used in the United States.

Canon
imageANYWARE