


PRODUCT SPECIFICATIONS

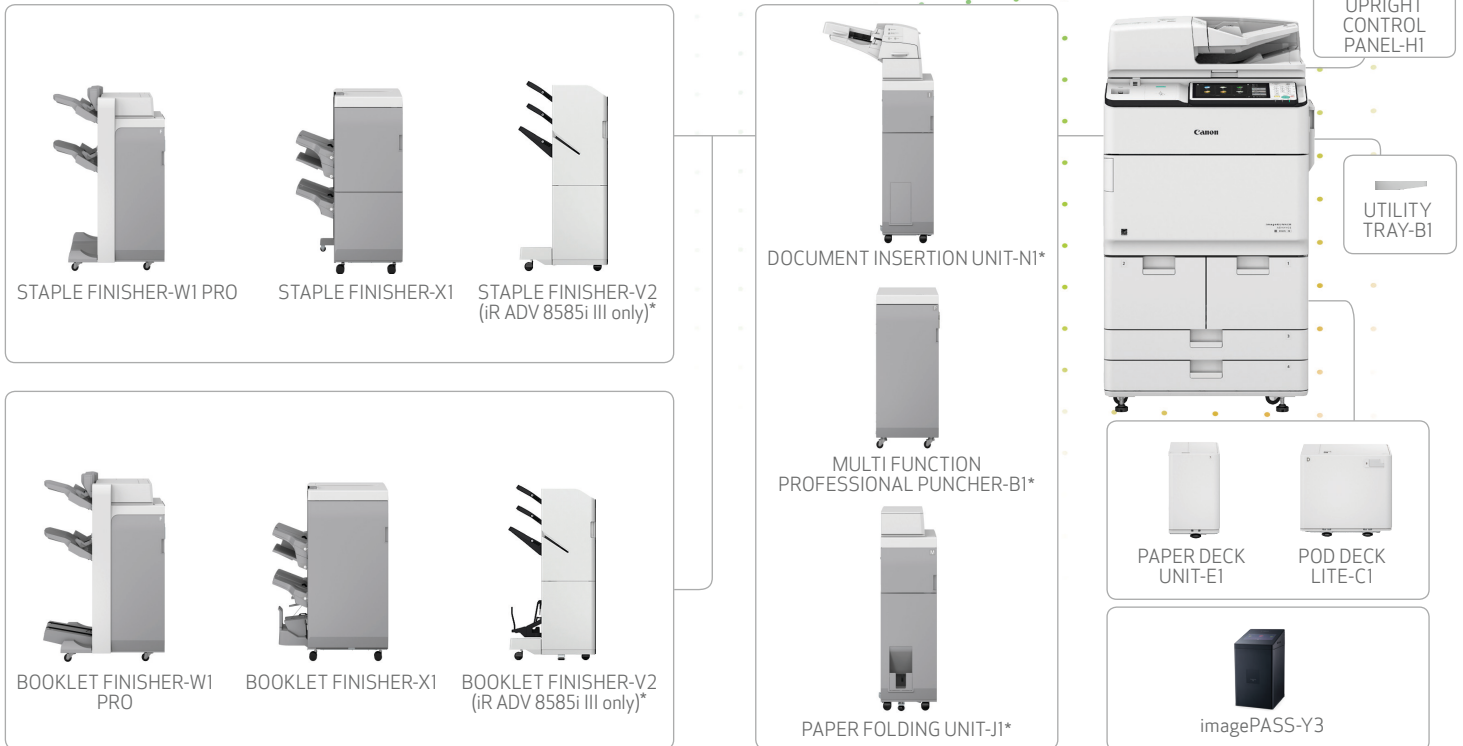

* Staple Finisher-V2 and Booklet Finisher-V2 are not compatible with Document Insertion Unit-JI, Multi Function Professional Puncher-BI, and Paper Folding Unit-JI.

Main Unit

Type	Monochrome Laser Multifunctional
Core Functions	Standard: Print, Copy, Scan, Send, Store Optional: Fax
Processor	Canon Dual Custom Processor (Shared)
Control Panel	Standard: 10.1" TFT LCD WSVGA Color Flat-panel Optional: 10.4" TFT LCD SVGA Color Upright-panel
Memory	3.0 GB RAM
Hard Disk Drive	Standard: 250 GB Maximum: 1 TB
Mirroring Hard Disk Drive	Optional (250 GB, 1 TB), Method: Raid1
Interface Connection	Network: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Low Energy Others Standard: USB 2.0 x2 (Host), USB 3.0 x1 (Host), USB 2.0 x1 (Device) Optional: Serial Interface, Copy Control Interface

Paper Capacity (LTR, 20 lb. Bond)

Standard:	4,360 Sheets
Maximum:	8,020 Sheets
Paper Sources (LTR, 20 lb. Bond)	
Standard:	Standard: Dual 1,560-sheet Paper Drawers, Dual 570-sheet Paper Cassettes, 100-sheet Stack Bypass
Optional:	3,660-sheet Paper Deck (Pod Deck Lite-CI or Paper Deck Unit-EI)

Paper Output Capacity (LTR, 20 lb. Bond)

With External Finishers (-V2):	3,500 Sheets
With External Finishers (-X1):	4,250 Sheets
With External Finishers (-WI PRO):	5,000 Sheets

Finishing Capabilities

With External Finishers: Collate, Group, Offset, Staple, Staple On Demand, Staple-free Staple, Booklet, Booklet Trimming, Hole Punch, Professional Hole Punch, Document Insertion, Folding (C, Z, Half, Accordion Z, Double-parallel)

Supported Media Types

Paper Drawers (1/2):	Thin, Plain, Recycled, Color, Heavy, Pre-punched, Letterhead, Bond
Paper Cassettes (3/4):	Thin, Plain, Recycled, Color, Heavy, Pre-punched, Letterhead, Bond, Tab

Stack Bypass:	Thin, Plain, Recycled, Color, Heavy, Pre-punched, Bond, Transparency, Labels, Letterhead, Tab, Tracing ¹
Pod Deck Lite-CI:	Thin, Plain, Recycled, Color, Heavy, Pre-punched, Letterhead, Bond, Transparency, Labels, Tab
Paper Deck Unit-EI:	Thin, Plain, Recycled, Color, Heavy, Pre-punched, Letterhead, Bond
Supported Media Sizes	
Paper Drawers (1/2):	Letter
Paper Cassettes (3/4):	13" x 19", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 13" x 19-1/4")
Stack Bypass:	13" x 19", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (4 x 5-7/8" to 13" x 19-1/4"), Free Size (4" x 7-1/8" to 13" x 19-1/4")
Pod Deck Lite-CI:	13" x 19", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Statement-R, Custom Size (5-1/2" x 7-1/8" to 13" x 19-1/4")
Paper Deck Unit-EI:	Letter
Supported Media Weights	
Paper Decks/ Cassettes:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)
Stack Bypass:	14 lb. Bond to 140 lb. Index (52 to 256 g/m ²)
Duplexing:	14 lb. Bond to 80 lb. Cover (52 to 220 g/m ²)

Warm-up Time

From Power On: Approx. 60 Seconds²

From Sleep Approx. 60 Seconds³

Mode:

Dimensions (W x D x H)

Standard: 26-3/8" x 30-5/8" x 48"
(670 mm x 779 mm x 1,220 mm)

With Optional

Upright 58-3/8" x 30-3/8" x 49-1/4"

Control Panel: (1,481 mm x 770 mm x 1,252 mm)

Installation Space (W x D)

Fully 162" x 55-1/8" (4,124 mm x 1,400 mm)

Configured: (POD Deck Lite-C1 + Booklet Finisher-W1
Pro + Document Insertion Unit-N1 + Paper
Folding Unit-J1 + Multi Function Professional
Puncher-B1)

Weight

With Standard

Flat Touch

Panel: Approx. 520.3 lb. (236 kg)⁴

With Optional

Upright

Control Panel: Approx. 529.1 lb. (240 kg)⁴

Print Specifications

Print Speed

8505i III: Up to 105 ppm (Letter)
Up to 81 ppm (Letter-R)
Up to 63 ppm (Legal)
Up to 53 ppm (11" x 17")

8595i III: Up to 95 ppm (Letter)
Up to 73 ppm (Letter-R)
Up to 60 ppm (Legal)
Up to 49 ppm (11" x 17")

8585i III: Up to 85 ppm (Letter)
Up to 67 ppm (Letter-R)
Up to 57 ppm (Legal)
Up to 43 ppm (11" x 17")

Print Resolution (dpi)

1200 x 1200, 600 x 600

Standard Page Description Languages

UFR III, PCL[®]6, Adobe[®] PS[®] 3

Direct Print

Available from USB, Advanced Box, Remote UI, and Web
Access⁵

Supported File Types

PDF, TIFF, JPEG, EPS,⁶ XPS

Printing from Mobile and Cloud

A range of software and MEAP-based solutions are
available to provide printing from mobile devices or
Internet-connected devices and cloud-based services
depending on your requirements.

Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,
Andalé Mono WT J/K/S/T (Japanese,
Korean, Simplified and Traditional Chinese)⁷,
Barcode fonts⁸

PS fonts: 136 Roman

Operating System⁹

UFR III: Server 2008/Windows 7/Server 2008 R2/
Server 2012/Windows 8.1/Server 2012 R2/
Windows 10/Server 2016, MAC OS X (10.9
or later)

PCL: Server 2008/Windows 7/Server 2008 R2/
Server 2012/Windows 8.1/Server 2012 R2/
Windows 10/Server 2016

PS: Server 2008/Windows 7/Server 2008 R2/
Server 2012/Windows 8.1/Server 2012 R2/
Windows 10/Server 2016, MAC OS X
(10.9 or later)

Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile
Settings, Secured Print, Watermark, Header/Footer, Page
Layout, Two-sided Printing, Collating, Booklet Printing,
Grouping, Mixed Paper Sizes/Orientations, Offsetting,
Front/Back Covers, Toner Reduction, Poster Printing,
Forced Hold Printing

Copy Specifications

Copy Speed

8505i III: Up to 105 ppm (Letter)
Up to 81 ppm (Letter-R)
Up to 63 ppm (Legal)
Up to 53 ppm (11" x 17")

8595i III: Up to 95 ppm (Letter)
Up to 73 ppm (Letter-R)
Up to 60 ppm (Legal)
Up to 49 ppm (11" x 17")

8585i III: Up to 85 ppm (Letter)
Up to 67 ppm (Letter-R)
Up to 57 ppm (Legal)
Up to 43 ppm (11" x 17")

First-Copy-Out Time

As Fast as 2.7 Seconds

Copy Resolution (dpi)

Reading: 600 x 600

Printing: 1200 x 1200

Multiple Copies

Up to 9,999 Copies

Copy Exposure

Automatic or Manual (9 Levels)

Magnification

25%-400% (1% Increments)

Preset Reductions

25%, 50%, 64%, 73%, 78%

Preset Enlargements

121%, 129%, 200%, 400%

Basic Copy Features

Preset Reduction/Enlargement Ratios by Area, Paper
Setting, Previous Settings, Favorite Settings, Finishing,
Two-Sided, Density Adjustment, Original Type Selection,
Interrupt Mode, Setting Confirmation/Cancel

Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet,
Job Build, N on 1, Add Cover, Insert Sheets, Different Size
Originals, Density Adjustment, Original Type Selection,
Transparency Cover Sheets, Page Numbering, Copy Set
Numbering, Sharpness, Erase Frame, Secure Watermark,
Print Date, Shift, Gutter, Print & Check, Negative/Positive,
Repeat Images, Merge Job Blocks, Job Done Notice, Mirror
Image, Print on Tab, Store in Mail Box, Superimpose Image,
Cascade Copy, Copy ID Card, Multi Sheet Feed Detection,
Skip Blank Pages, Free Size Original

Scan Specifications

Type

Color Platen and Single-pass Duplexing Automatic
Document Feeder

Document Feeder Paper Capacity

300 Sheets (20 lb. Bond)

Document Feeder Supported Media Sizes

11" x 17", Legal, Letter, Letter-R, Statement, Statement-R,
Custom size [5" x 5-1/2" to 12" x 17" (128 x 139.7 mm to
304.8 mm x 431.8 mm)]

Document Feeder Supported Media Weights

BW Original: 13 lb. Bond to 80 lb. Cover
(50 to 220 g/m²)

CL Original: 17 lb. Bond to 80 lb. Cover
(64 to 220 g/m²)

Platen Acceptable Originals

Sheet, Book, 3-Dimensional Objects [Height: Up to 2"
(50 mm), Weight: up to 4.4 lb. (2 kg)]

Platen Max. Scanning Size

11-3/4" x 17" (297 mm x 431.8 mm)

Pull Scan

Color Network ScanGear2 for both Twain and WIA
Supported OS: Windows 7/8.1/10/Server 2008/Server
2008 R2/Server 2012/Server 2012 R2/Server 2016

Scan Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200,
200 x 100, 150 x 150, 100 x 100

Scan to Mobile Devices and Cloud-based Services

A range of solutions is available to provide scanning to
mobile devices or and cloud-based services depending
on your requirements.

Scan Speed (Letter)

Single-sided Scanning
BW: 120 ipm (300 dpi)/120 ipm (600 dpi)
Color: 120 ipm (300 dpi)

Double-sided Scanning
BW: 240 ipm (300 dpi)/150 ipm (600 dpi)
Color: 220 ipm (300 dpi)

Send Specifications

Destination

Email/Internet Fax (SMTP), SMB v3.0, FTP, WebDAV, Mail
Box, Super G3 Fax (Optional), IP Fax (Optional)

Color Mode

Automatic-Color Select (Full Color/Grayscale), Automatic-
Color Select(Full Color/Black-and-White),
Full color, Grayscale, and Black-and-White

Address Book

LDAP (2,000)/Local (1,600)/Speed dial (200)

Send Resolution (dpi)

600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200,
200 x 100, 150 x 150, 100 x 100

Communication Protocol

File: FTP (TCP/IP), SMB v3.0, WebDAV

Email: SMTP, POP3

File Format

Standard: TIFF, JPEG, PDF(Compact, Searchable,
Apply policy, Optimize for Web, PDF
A/1-b, Encrypted, Device Signature), XPS
(Compact, Searchable, Device Signature),
Office Open XML (PowerPoint, Word)

Optional: PDF (Trace & Smooth, User Signature),
XPS (User Signature)

Universal Send Features

Original Type Selection, Two-sided Original, Book to
Two Pages, Different-size Originals, Density Adjustment,
Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's
Name (TTI), Delayed Send, Preview, Job Done Notice, File
Name, Subject/Message, Reply-to, Email Priority, TX
Report, Original Content Orientation, Skip Blank Originals,
Multi Sheet Feed Detection

Fax Specifications (Optional)

Maximum Number of Connection Lines

4

Modem Speed

Super G3: 33.6 Kbps

G3: 14.4 Kbps

Compression Method

MH, MR, MMR, JBIG

Resolution (dpi)

400 x 400, 200 x 400, 200 x 200, 200 x 100

Sending/Recording Size

Statement-R to 11" x 17"

Fax Memory

Up to 30,000 Pages

Speed Dials

Max. 200

Group Dials/Destinations

Max. 199 Dials

Sequential Broadcast

Max. 256 Addresses

Memory Backup

Yes

Fax Features

Original Type Selection, Two-sided Original, Book to Two
Pages, Different-size Originals, Density for Scanning,
Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's
Name (TTI), Selecting the Telephone Line, Direct Send,
Delayed Send, Preview, Job Done Notice, TX Report, Multi
Sheet Feed Detection

Store Specifications

Mail Box (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, 30,000 Maximum Pages Stored

Advanced Box

Communication
Protocol: SMB or WebDAV
Supported
Client PC: Windows (Windows 7/8.1/10)
Concurrent Connections (Max.):
SMB: 64
WebDAV: 3 (Active Sessions)

Advanced Box Available Disc Space

Approx. 16 GB (Standard HDD)
Approx. 480 GB (Optional 1 TB HDD)

Advanced Box Features

Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

Memory Media

Standard: USB

Security Specifications

Authentication

Standard: Universal Login Manager, uniFLOW Online Express,¹⁰ User Authentication, Department ID Authentication, (Device and Function Level Log-in), Access Management System
Optional: uniFLOW

Data

Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (FIPS140-2 Validated), Verify System at Startup, McAfee Embedded Control¹¹
Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, IEEE 2600.2 Common Criteria Certification, Data Loss Prevention (Requires uniFLOW)

Network

Standard: IP/Mac Address Filtering, IPsec, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME, SIEM Integration

Document

Standard: Secure Watermark, SecurePrint, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device Signature
Optional: User Signatures, Document Scan Lock

Environmental Specifications

Operating Environment

Temperature: 50 to 86 °F
Humidity: 20 to 80 % RH (Relative Humidity)

Power Requirements

120-127 V AC, 60 Hz, 16 A

Plug (Main Unit)

NEMA 5-20P

Power Consumption

Maximum: Approx. 2,032 W
Standby: Approx. 239 W²
Sleep Mode: Approx. 0.9 W or less³
Typical Electricity Consumption (TEC) Rating⁴
8505i III: 10.5 kWh
8595i III: 9.8 kWh

Standards

ENERGY STAR® Certified: 8505i III / 8595i III
Rated EPEAT® Gold:¹⁵ 8505i III / 8595i III

Consumables

Toner

GPR-37 Black Toner

Toner Yield (Estimated @ 6% Coverage)

70,000 pages

Fiery Print Controller Specifications (Optional)

Name

imagePASS-Y3 (External)

System

Fiery FS350Pro

Print Resolution (dpi)

1200 x 1200, 600 x 600

Standard Page Description Languages

PCL6, Adobe PS 3

Memory

8 GB (2 x 4 GB)

Hard Disk Drive

500 GB SATA

Processor

Intel Pentium G4400 (3.3 GHz)

Fonts

PS: 138 Adobe PS Fonts
PCL: 113 PCL Fonts

Supported Operating Systems

Windows 7 (32 and 64 bit)/Windows 8.1 (32 and 64 bit)/Windows 10 (32 and 64 bit)/Windows Server 2012 (64 bit only)/Windows Server 2012 R2 (64 bit only)/Windows Server 2016 R2 (64 bit only)/MAC OS (10.11 or later)

Interface

2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB 3.0 x 2 (rear), x3 (front on Fiery Quick Touch™), USB 2.0 x4 (rear)

Network Protocols

TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port9100, SNT, 802.1X, DHCP, DNS, NTP)

Fiery Print Controller Features

Fiery Command WorkStation6/Paper Catalog, Fiery Remote Scan/Fiery Hot Folders & Virtual Printers/Fiery JDF

Fiery Print Controller Options

Fiery Impose, Fiery Compose, Fiery Impose and Compose, Removable HDD Kit, Fiery Image Viewer

Dimensions (W x D x H)

8" x 9-3/4" x 15-1/8" (203 mm x 248 mm x 384 mm)

Paper Supply Options

PAPER DECK UNIT-E1

Paper

Capacity: 3,660 Sheets [20 lb. Bond (80 g/m²)]
Paper Size: Letter
Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
Power Source: From the Main Unit
Dimensions: 13-3/8" x 24-7/8" x 22-1/2"
(W x D x H): (340 mm x 630 mm x 572 mm)
Weight: Approx. 75.0 lb. (34 kg)

POD DECK LITE-C1

Paper

Capacity: 3,660 Sheets [20 lb. Bond (80 g/m²)]
Paper Size: 13" x 19", 12" x 18", 11"x17", Legal, Letter, Letter-R, Executive, Statement-R, and Custom Size (5-1/2" x 7-1/8" to 13" x 19-1/4")
Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
Power Source: 120-127 V AC, 60 Hz, 2.2 A
Dimensions: 24-7/8" x 27" x 22-5/8"
(W x D x H): (633 mm x 686 mm x 574 mm)
Weight: Approx. 149.9 lb. (68 kg)

Output Options

STAPLE FINISHER-V2¹⁶

Number of Trays: 3
Tray A (Upper) Capacity:¹⁷ Letter/Executive/Statement-R 250 Sheets
13" x 19"/12" x 18"/11" x 17"/Legal/Letter-R 125 Sheets
Tray B (Middle) Capacity:¹⁷ Letter/Executive/Statement-R 250 Sheets
13" x 19"/12" x 18"/11" x 17"/Legal/Letter-R 125 Sheets
Tray C (Lower) Capacity:¹⁷ Letter/Executive/Statement-R 3,000 Sheets
13" x 19"/12" x 18"/11" x 17"/Legal/Letter-R 1,500 Sheets

Acceptable Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
Staple Position: Corner, Double

Staple Capacity:

Corner Staple and Double Staple:

Letter/Executive: 65 Sheets [24 lb. Bond (90 g/m²)]
11" x 17"/Legal/Letter-R: 30 Sheets [24 lb. Bond (90 g/m²)]

Staple-Free Staple:

5 Sheets [14 to 17 lb. Bond (52 to 64 g/m²)]
4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m²)]
3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m²)]
11"x17"/Letter: (81.5 to 105 g/m²)

Staple On Demand:

65 Sheets [20 lb. Bond (80 g/m²)]

Power Source: From the Main Unit

Dimensions: 25-7/8" x 24-1/2" x 47-1/8"

(W x D x H): (656 mm x 623 mm x 1,195 mm)¹⁸

Weight: Approx. 77.2 lb. (35 kg)

STAPLE FINISHER-X1

Number of Trays: 3
Tray A (Upper) Capacity:¹⁷ Letter/Executive/Statement-R 1,500 Sheets
13" x 19"/12" x 18"/11" x 17"/Legal/Letter-R 750 Sheets
Tray B (Middle) Capacity:¹⁷ Letter/Executive/Statement-R 250 Sheets
11" x 17"/Legal/Letter-R 125 Sheets
Tray C (Lower) Capacity:¹⁷ Letter 2,500 Sheets
Executive/Statement-R 1,500 Sheets
13" x 19"/12-5/8" x 17-11/16"/12" x 18"/11" x 17"/Legal/Letter-R 750 Sheets

Acceptable

Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
Staple Position: Corner, Double

Staple Capacity:

Letter/Executive: 100 Sheets [20 lb. Bond (80 g/m²)]
11" x 17"/Legal/Letter-R: 50 Sheets [20 lb. Bond (80 g/m²)]
Power Source: 100-240 V AC, 50/60 Hz, 2.8 A
Dimensions: 30-3/4" x 30-1/8" x 41"
(W x D x H): (782 mm x 765 mm x 1040 mm)¹⁸
Weight: Approx. 141.1 lb. (64 kg)

STAPLE FINISHER-WI PRO

Number of Trays: 2
 Tray A (Upper) Capacity:¹⁷ 13" x 19"/12" x 18"/11" x 17"/Legal/Letter/ Letter-R/Executive 1,000 Sheets
 Tray B (Lower) Capacity:¹⁷ Letter/Executive 2,000 Sheets, 13" x 19"/12" x 18"/11" x 17"/Legal/Letter-R 1,000 Sheets
 If the High-Volume Stack Mode is set to "OFF": Letter/Executive/Executive-R 4,000 Sheets, Letter-R 2,000 Sheets
 to "ON": 11" x 17"/Legal 1,500 Sheets 13" x 19"/12" x 18"/Executive-R 1,000 Sheets

Acceptable Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
 Staple Position: Corner, Double
 Staple Capacity: Letter/Executive: 100 Sheets [14 to 20 lb. Bond (52 to 80 g/m²)] 11" x 17"/Legal/Executive-R/ Letter-R: 50 Sheets [14 to 20 lb. Bond (52 to 80 g/m²)]
 Power Source: 120-127 V AC, 50/60 Hz, 8 A
 Dimensions (W x D x H): 35" x 31-1/4" x 48-3/4" (890 mm x 792 mm x 1239 mm)¹⁸
 Weight: Approx. 286.6 lb. (130 kg)

BOOKLET FINISHER-V2

Number of Trays: 3
 Tray A (Upper) Capacity:¹⁷ Letter/Executive/Statement-R 250 Sheets 13" x 19"/12" x 18"/11" x 17"/Legal/Letter-R 125 Sheets
 Tray B (Middle) Capacity:¹⁷ Letter/Executive/Statement-R 250 Sheets 13" x 19"/12" x 18"/11" x 17"/Legal/Letter-R 125 Sheets
 Tray C (Lower) Capacity:¹⁷ Letter/Executive/Statement-R 3,000 Sheets 13" x 19"/12-5/8" x 17-11/16"/12" x 18"/11" x 17"/ Legal/Letter-R 1,500 Sheets

Acceptable Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
 Staple Position: Corner, Double
 Staple Capacity: Corner Staple and Double Staple: Letter/Executive: 65 Sheets [24 lb. Bond (90 g/m²)] 11" x 17"/Legal/ Letter-R: 30 Sheets [24 lb. Bond (90 g/m²)]
 Staple-Free Staple: 5 Sheets [14 to 17 lb. Bond (52 to 64 g/m²)] 4 Sheets [17.3 to 21.7 lb. Bond (65 to 81.4 g/m²)] 11"x17"/ Letter: 3 Sheets [21.7 to 28 lb. Bond (81.5 to 105 g/m²)]
 Staple On Demand: 65 Sheets [20 lb. Bond (80 g/m²)]
 Saddle-Stitch Paper Size: 13" x 19", 12 x 18, 11" x 17", Legal, Letter-R, Custom Size (8-1/4" x 11" to 13" x 19-1/4")
 Paper Capacity of Saddle-Stitch Mode: 20 sheets x 5 sets [16 to 20 lb. Bond (60 to 81 g/m²)] [including one cover sheet up to 140 lb. Index (256 g/m²)]
 Power Source: From the Main Unit
 Dimensions (W x D x H): 25-7/8" x 24-1/2" x 47-1/8" (656 mm x 623 mm x 1,195 mm)¹⁸
 Weight: Approx. 127.9 lb. (58 kg)

BOOKLET FINISHER-XI

Number of Trays: 3
 Tray A (Upper) Capacity:¹⁷ Letter/Executive/Statement-R 1,500 Sheets 13" x 19"/12" x 18"/11" x 17"/Legal/Letter-R 750 Sheets
 Tray B (Middle) Capacity:¹⁷ Letter/Executive/Executive-R/Statement-R 250 Sheets 11" x 17"/Legal/Letter-R 125 Sheets
 Tray C (Lower) Capacity:¹⁷ Letter 2,500 Sheets Executive/Statement-R 1,500 Sheets 13" x 19"/12-5/8" x 17-11/16"/12" x 18"/11" x 17"/ Legal/Letter-R 750 Sheets

Acceptable Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
 Staple Position: Corner, Double
 Staple Capacity: Letter/Executive: 100 Sheets [20 lb. Bond (80 g/m²)] 11" x 17"/Legal/ Letter-R: 50 Sheets [20 lb. Bond (80 g/m²)]
 Saddle-Stitch Paper Size: 13" x 19"/12" x 18"/11" x 17"/Legal/Letter-R, Custom Size (8-1/4" x 11" to 13" x 19-1/4")
 Paper Capacity of Saddle-Stitch Mode: 20 sheets x 10 sets [14 to 20 lb. Bond (52 to 80 g/m²)] [(including one cover sheet up to 140 lb. Index (256 g/m²)]
 Power Source: 100-240 V AC, 50/60 Hz, 2.8 A
 Dimensions (W x D x H): 35-1/4" x 30-1/8" x 41" (896 mm x 765 mm x 1040 mm)¹⁸
 Weight: 242.5 lb. (110 kg)

BOOKLET FINISHER-WI PRO

Number of Trays: 2
 Tray A (Upper) Capacity:¹⁷ Letter/Executive/Statement-R 250 Sheets 13" x 19"/12" x 18"/11" x 17"/Legal/Letter/ Letter-R/Executive 1,000 Sheets
 Tray B (Lower) Capacity:¹⁷ Letter/Executive/Statement-R 2,000 Sheets 13" x 19"/12" x 18"/Legal/Letter-R/ Executive-R 1,000 Sheets
 If the High-Volume Stack Mode is set to "OFF": Letter/Executive 4,000 Sheets, Letter-R 2,000 Sheets
 Mode is set to "ON": 11" x 17"/Legal/Executive-R 1,500 Sheets 13" x 19"/12" x 18" 1,000 Sheets

Acceptable Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
 Staple Position: Corner, Double
 Staple Capacity: Letter/Executive: 100 Sheets [14 to 20 lb. Bond (52 to 80 g/m²)] 11" x 17"/Legal/ Executive-R/ Letter-R: 50 Sheets [14 to 20 lb. Bond (52 to 80 g/m²)]
 Saddle-Stitch Paper Size: 13" x 19"/12" x 18"/11" x 17"/Legal/Letter-R, Custom Size" (8-1/4" x 11" to 13" x 19-1/4")
 Paper Capacity of Saddle-Stitch Mode: 25 sheets x 10 sets [14 to 20 lb. Bond (52 to 80 g/m²)] [(including one cover sheet up to 140 lb. Index (256 g/m²)]
 Power Source: 120-127 V AC, 50/60 Hz, 8 A
 Dimensions (W x D x H): 41-3/4" x 31-1/4" x 48-3/4" (1060 mm x 792 mm x 1239 mm)¹⁸
 Weight: 401.2 lb. (182 kg)

2/3 HOLE PUNCHER-AI¹⁹

Acceptable Punch Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
 Acceptable Punch Paper Size: Two holes 11" x 17", Legal, Letter, Letter-R, Executive
 Three holes 11" x 17", Letter, Executive
 Power Source: From the Main Unit

PUNCHER UNIT-BFI²⁰

Acceptable Punch Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
 Acceptable Punch Paper Size: Two holes Legal, Letter, Letter-R, 11" x 17", Executive
 Three holes 11" x 17", Letter, Executive
 Power Source: From the Finisher

PUNCHER UNIT-BSI²¹

Acceptable Punch Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
 Acceptable Punch Paper Size: Two holes Legal, Letter, Letter-R, Custom Size (7-1/8" x 7-1/8" to 11-3/4" x 17")
 Three holes 11" x 17", Letter, Executive, Custom Size (9-1/2" x 7-1/8" to 11-3/4" x 17")
 Power Source: From the Finisher

MULTI FUNCTION PROFESSIONAL PUNCHER-BI²²

Acceptable Paper Weight: Bypass: 14 lb. Bond to 110 lb. Cover (52 to 300 g/m²)
 Punch: 20 lb. Bond to 110 lb. Cover (75 to 300 g/m²)
 Acceptable Punch Paper Size: 12"x18", 11"x17", Legal, Letter-R, Letter
 Supported Punch Dies (Optional): Letter, Loose Leaf (3-, 4-, or 5- hole), Plastic Comb (19-hole), Twin Loop (21- or 32-hole), Color Coil (44-hole), Velo Bind (11-hole)
 Power Source: 115 V AC, 60 Hz, 3.8 A
 Dimensions (W x D x H): 17-1/2" x 31-3/8" x 41" (445 mm x 795 mm x 1040 mm)
 Weight: 225 lb. (102 kg)

INNER BOOKLET TRIMMER-AI²³

Trim Capacity: 40 Sheets
 Acceptable Paper Weight: 16 lb. Bond to 140 lb. Index (60 to 256 g/m²)
 Acceptable Paper Size: 13" x 19", 12"x18", 11"x17", Legal, Letter-R, Custom Size (8-1/4"x11" to 13"x 19-1/4")
 Power Source: From the Finisher

BOOKLET TRIMMER-FI²⁴

Booklet Capacity: 15 Booklets [Booklet Size: Letter, 20 lb. Bond, 3/4" (20 mm) trim amount]
 Trim Amount: 1/8" to 1-1/8" (2 mm to 20 mm)
 Waste Tray Capacity: Approx. 5,000 Sheets
 Dimensions (W x D x H): 82-1/2" x 31-1/8" x 41" (2,095 mm x 790 mm x 1,040 mm) (including joint)
 Weight: Approx. 392.4 lb. (178 kg)

DOCUMENT INSERTION UNIT-NI²²

Number of Insertion Trays: 2 Trays
 Acceptable Insertion Paper Size: 13" x 19", 12" x 18", 11" x 17", Legal, Letter, Letter-R, Executive, Custom Size (7-1/8" x 7-1/8" to 13" x 19-1/4")
 Acceptable Insertion Paper Weight: 14 lb. Bond to 140 lb. Index (52 to 256 g/m²)
 Power Source: 100-240 V AC, 50/60 Hz, 1.0 A
 Dimensions (W x D x H): 13-1/4" x 31-1/4" x 55-3/8" (336 mm x 793 mm x 1407 mm)
 Weight: Approx. 134.5 lb. (61 kg)

PAPER FOLDING UNIT-JI²⁰

Supported Fold Types: C-Fold, Z-Fold, Accordion Z-Fold, Double-parallel Fold, Half-fold
 Paper Size/ Weight: C-Fold Paper Letter-R/14 to 28 lb. Bond (52 to 105 g/m²)
 Z-Fold Paper Size/ Weight: 11" x 17", Legal, Letter-R/14 to 28 lb. Bond (52 to 105 g/m²)
 Accordion Z-Fold Paper Size/ Weight: Letter-R/14 to 28 lb. Bond (52 to 105 g/m²)
 Double Parallel Fold Paper Size/ Weight: Legal, Letter-R/14 to 24 lb. Bond (52 to 90 g/m²)
 Weight: (52 to 90 g/m²)
 Half Fold Paper Size/ Weight: Letter-R/14 to 28 lb. Bond (52 to 105 g/m²)
 Power Source: From the Finisher
 Dimensions (W x D x H): 13-1/4" x 31-1/4" x 46-7/8" (336 mm x 793 mm x 1190 mm)
 Weight: Approx. 156.5 lb. (71 kg)

Hardware Options

Card Readers

MiCARD PLUS PROXIMITY CARD READER
COPY CARD READER-F1
COPY CARD READER ATTACHMENT-A4

Others

PRINTER COVER-H1
TAB FEEDING ATTACHMENT KIT-B1
STAMP UNIT-B1
STAMP INK CARTRIDGE-C1
UPRIGHT CONTROL PANEL-H1
UTILITY TRAY-B1

Security Options

Document Security

DOCUMENT SCAN LOCK KIT-B2

Data Security

HDD MIRRORING KIT-J1
2.5 INCH/250 GB HDD-N1
2.5 INCH/1 TB HDD-P1
REMOVABLE HDD KIT-AL1

System and Controller Options

Send Options

UNIVERSAL SEND DIGITAL USER SIGNATURE KIT-C1
UNIVERSAL SEND TRACE & SMOOTH PDF KIT-A1

Print Accessories

PCL INTERNATIONAL FONT SET-A1

Barcode Printing

BARCODE PRINTING KIT-D1

Fiery Based Controller

imagePASS-Y3
REMOVABLE HARD DISK DRIVE KIT-B6
FIERY IMPOSE
FIERY COMPOSE
FIERY IMPOSE AND COMPOSE
FIERY IMAGE VIEWER

System Accessories

SERIAL INTERFACE KIT-K3
MEAP WEB CONNECTION KIT-V5.3²⁵
NFC KIT-C1
NFC KIT-A1 (FOR UPRIGHT CONTROL PANEL)
CONNECTION KIT-A1 FOR BLUETOOTH LE

Fax Accessories

SUPER G3 FAX BOARD-AS2
SUPER G3 2ND LINE FAX BOARD-AS2
SUPER G3 3RD/4TH LINE FAX BOARD-AS2
REMOTE FAX KIT-A1
IP FAX EXPANSION KIT-B1

Other Options

Accessibility Accessories

ADF ACCESS HANDLE-A1
VOICE GUIDANCE KIT-G1
VOICE OPERATION KIT-D1

Staples

STAPLE CARTRIDGE-X1²⁶
STAPLE CARTRIDGE-Y1²⁷
STAPLE-N1²⁸
STAPLE-P1²⁹

- ¹ Some types of tracing paper cannot be used.
- ² Time from device power-on, until copy ready (not print reservation).
- ³ Time from exiting Sleep mode to when printing is operational.
- ⁴ Including the toner bottle.
- ⁵ PDF print from websites is supported.
- ⁶ EPS can be printed directly only from the Remote User Interface.
- ⁷ Requires the optional PCL International Font Set-A1.
- ⁸ Requires optional Barcode Printing Kit-D1.
- ⁹ Other operating systems and environments including AS/400, UNIX, Linux and Citrix may be supported. Some of these solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.
- ¹⁰ No charge for this solution; however activation is required.
- ¹¹ Requires Unified Firmware Platform v3.9.
- ¹² Standby Reference Value: measured one unit.
- ¹³ 0.9 W sleep mode may not be possible in all circumstances due to certain settings.
- ¹⁴ Based on ENERGY STAR Product Specification for Imaging Equipment Version 3.0.
- ¹⁵ For current EPEAT rating (Gold/Silver/Bronze), please visit www.epeat.net.
- ¹⁶ Compatible only with the imageRUNNER ADVANCE 8585i III model.
- ¹⁷ With 20 lb. Bond (80 g/m²) paper.
- ¹⁸ When the extension tray and rotary tray are extended.
- ¹⁹ Requires either Staple Finisher-V2 or Booklet Finisher-V2.
- ²⁰ Requires either Staple Finisher-X1 or Booklet Finisher-X1.
- ²¹ Requires either Staple Finisher-W1 PRO or Booklet Finisher-W1 PRO.
- ²² Requires either Staple Finisher-X1, Booklet Finisher-X1, Staple Finisher-W1 PRO, or Booklet Finisher-W1 PRO.
- ²³ Requires Booklet Finisher-X1.
- ²⁴ Requires Booklet Finisher-W1 PRO.
- ²⁵ No charge for this option; however it does need to be ordered.
- ²⁶ For Staple Finisher-V2 and Booklet Finisher-V2. Used for corner/double stapling only, 3 cartridges per case, 5,000 staples per cartridge.
- ²⁷ For Booklet Finisher-V2. Used for booklet finishing only, 2 cartridges per case, 2,000 staples per cartridge.
- ²⁸ For Staple Finisher-X1, Booklet Finisher-X1, Staple Finisher-W1 PRO and Booklet Finisher-W1 PRO), 3 cartridge per case, 5,000 staples per cartridge.
- ²⁹ For Booklet Finisher-X1 and Booklet Finisher-W1 PRO, 2 cartridges per case, 5,000 staples per cartridge.

 USA.CANON.COM/SIMPLYADVANCED



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has certified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. AirPrint and the AirPrint logo are trademarks of Apple Inc. Canon, imageRUNNER, imageWARE, imagePASS, and the GENUINE logo are registered trademarks or trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. McAfee and the McAfee logo are trademarks of McAfee LLC in the US and/or other countries. All other referenced product names and marks are trademarks of their respective owners. All printer output images are simulated. All features presented in this brochure may not apply to all Series and/or products and may be optional; please check with your Canon Authorized Dealer for details. Products shown with optional accessories. Canon U.S.A. does not provide legal counsel or regulatory compliance consultancy, including without limitation, Sarbanes-Oxley, HIPAA, GLBA, Check 21 or the USA Patriot Act. Each customer must have its own qualified counsel determine the advisability of a particular solution as it relates to regulatory and statutory compliance. Specifications and availability subject to change without notice. Not responsible for typographical errors.

©2019 Canon U.S.A., Inc. All rights reserved.

1019R2-iRA85xIIISS-PDF-DIH



To learn about Canon's many awards, visit usa.canon.com/awards.