


“Galileo” Screen Shot
Canon GUI SW

Servo Tuning Utility (AUTO TUNING Available)

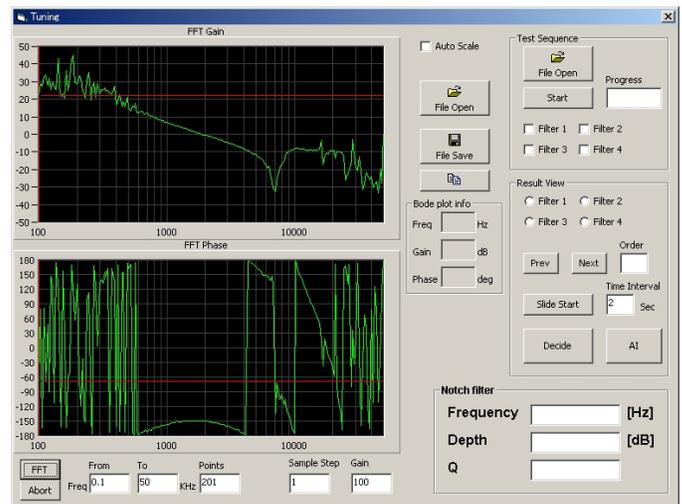

Specification		KP-1SM30	KP-1SM100
Beam Diameter		up to $\phi 20\text{mm}$	up to $\phi 30\text{mm}$
Scan Angle (Mechanical)		$\pm 15^\circ$	
Small Step Response		450 μsec	580 μsec
Resolution		0.036 μrad	
Position Repeatability		1 μrad	
Thermal Drift	Gain Drift	0	
	Offset Drift	3 $\mu\text{rad}/^\circ\text{C}$	
	Power-On Drift	5 $\mu\text{rad} / 8\text{hrs}$	
Non-Linearity		less than 0.02%	
Weight		950g	1650g
Power Supply	Motor Driver	+24V $\pm 10\%$, 10A per axis	
	Logic Circuit	+5V $\pm 5\%$, 2.8A	
Communication		High Speed Serial: XY2-100, 16~20bit Serial: RS-232C	
Environment	Operating	13~33 $^\circ\text{C}$ 90%RH maximum (no condensation)	
	Storage	-20~60 $^\circ\text{C}$ 90%RH maximum (no condensation)	

Canon U.S.A., Inc.

www.usa.canon.com

1/2011

New York Office
One Canon Plaza
Lake Success, NY 11042-1198
Tel: 1-516-328-4611
E-mail: encoder@cusa.canon.com

San Jose Office
3300 North First Street
San Jose, CA 95134-1900
Tel: 1-408-468-2039
E-mail: encoder@cusa.canon.com

Canon