





Custom Die Set Program

Expand your finishing offerings to your customers with non-standard and custom punch patterns.

Canon offers a range of standard dies for use with the Professional Puncher option for imagePRESS and imageRUNNER ADVANCE systems. Through the Custom Die Program we also offer non-standard dies. Examples of non-standard built-to-order dies include:

CombBind*: 19 LTR or 21 A4; Hole Size: .3125" L x .125" W

Center-to-Center Hole Spacing: .5625"

NOTE: Deep backgauge settings available:

0.141" and 0.187

Color Coil*: 44 LTR or 47 A4; Oversized Oval: 4:1 (4 Holes/Inch)

Hole Size: .158" L x .197" W

Center-to-Center Hole Spacing: .2475"

Looseleaf Binding: 3-Hole; Hole Size: .3125" Diameter 5, 7-Hole; Hole Size: .3125" Diameter


3, 7 1101

WireBind/ Custom Round 32-Hole LTR: 3:1 (3 Holes/Inch)
TwinLoop™: Hole Size: .156″ Diameter; Center-to-Center: .333″


Custom Round 21-Hole LTR: 2:1 (2 Holes/Inch) Hole Size: .250" Diameter; Center-to-Center: .500"

Custom Square 34-Hole A4: 3:1 (3 Holes/Inch) Hole Size: .156" L x .156" W; Center-to-Center: .333"

Custom Square 23-Hole A4: 2:1 (2 Holes/Inch) Hole Size: .250" L x .214" W; Center-to-Center: .500"

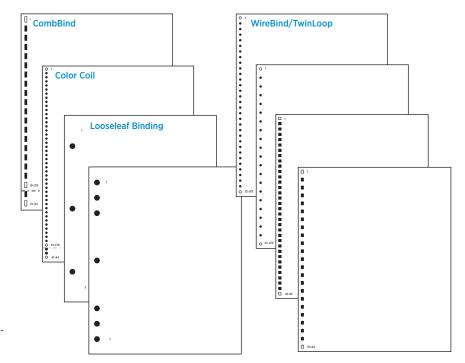

To find out if we are able to make the custom die set you require, contact your Canon Authorized Dealer today. Canon will evaluate any non-standard punch pattern. You'll be required to define the number of holes, distance from paper edge to punch holes, hole size, and distance between holes.



Note: Graphics shown are for reference only and do not represent actual punch pattern dimensions or spacing.





DuraGlide HD Die Sets

Heavy Duty (HD) dies last 8x longer than standard dies. High-volume production users will benefit from the commercial-grade construction which provides dramatically greater duty cycle than standard dies.

Benefits

- · Long expected life: eight times that of a standard die-4 million vs. 500,000*
- Five times less maintenance—unique encapsulated oil carrier retains lubrication for up to 250,000 cycles
- · Superior reliability and durability for long job-runs

	Standard Dies	DuraGlide HD Dies
Die Life Cycle	500,000 cycles	4,000,000 cycles*
Lubrication Cycle	50,000 cycles	250,000 cycles

^{*}Die life is not guaranteed. It's a life expectancy that can vary based on media types and weights used.

Choose from three popular patterns

CombBind: Hole Size: .3125" L x .125" W


Center-to-Center Hole Spacing: .5625"

Color Coil: 4:1 Pitch (4 Holes/Inch)

Hole Size: .172" Diameter

Looseleaf Binding:

Center-to-Center Hole Spacing: .2475" Standard Looseleaf Patterns: 3-Hole Hole Size: .3125" Diameter

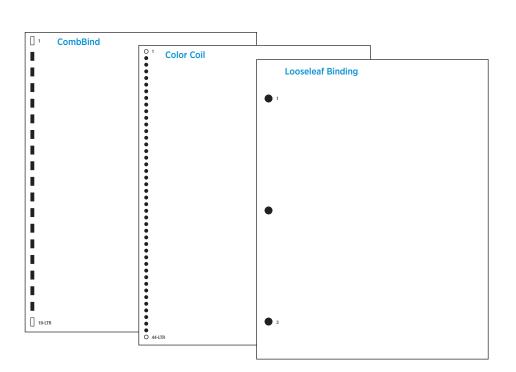

GBC CUSTOM DIE SET PROGRAM AND DURAGLIDE HD DIE SETS

Compatible with Professional Puncher Option for the following Canon Systems:

• imagePRESS C7010VP	• imagePRESS 1135P
• imagePRESS C6010VP	• imagePRESS 1125P
• imagePRESS C6010	• imagePRESS 1110P
• imagePRESS C7010VPS	• imagePRESS 1110S
• imagePRESS C6010VPS	• imageRUNNER ADVANCE C9075 PRO
• imagePRESS C6010S	• imageRUNNER ADVANCE C9065 PRO
• imagePRESS 1135+	• imageRUNNER ADVANCE C9075S PRO
• imagePRESS 1125+	• imageRUNNER ADVANCE C9065S PRO
• imagePRESS 1110+	• imageRUNNER ADVANCE 8105
• imagePRESS 1110S+	• imageRUNNER ADVANCE 8095
	• imageRUNNER ADVANCE 8085



1-800-OK-CANON www.usa.canon.com

Canon U.S.A., Inc. One Canon Plaza Lake Success, NY 11042

CANON, IMAGEPRESS, and IMAGERUNNER are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All other referenced product names and marks are trademarks of their respective owners and are hereby acknowledged. Some items may not be available at this time; please check for availability. Specifications and availability subject to change without notice.

©2012 Canon U.S.A., Inc. All rights reserved.