




## Connecting to a Smartphone Using an Infrastructure Connection

These instructions are continued from Chapter 5.


To establish connection, operations on the smartphone is required. For details, refer to the smartphone's instruction manual.

To connect in the camera access point mode, see "Using Camera Access Point Mode to Establish a Connection" (p.33).

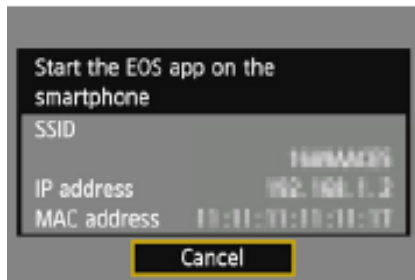


**1 Start EOS Remote on the smartphone.**

- When the screen on the left is displayed, start EOS Remote on the smartphone.

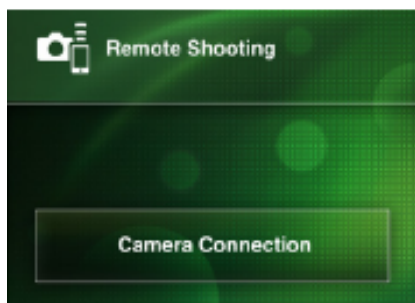

**2 Select [Camera Connection] on the smartphone.**

- Select [Camera Connection] on EOS Remote.

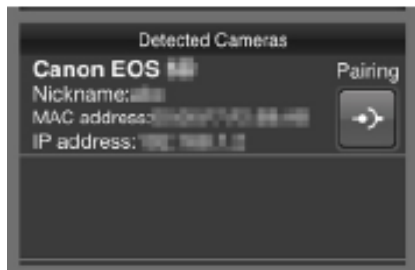

**3 Select the camera to connect to on the smartphone.**


- Select the camera to connect to from the [Detected Cameras] on EOS Remote.
- If multiple cameras are displayed, identify the camera to connect to by its MAC address displayed on the camera's LCD monitor.
- The MAC address can also be checked on the [General sett.] screen (p.149).
- ▶ Pairing starts.



A character other than in ASCII format is displayed as □.


#### 4 Connect to the camera.

- When pairing is completed, the screen on the left is displayed. Press the <◀▶> key to select [OK], then press <SET>.
- To limit viewable images, press the <INFO.> button. For details, see “Specifying Viewable Images” (p.81).

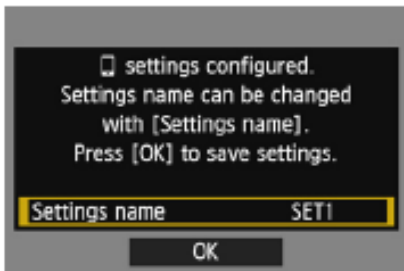


#### 5 Perform further settings.

- To finish settings in this stage, press the <▲▼> key to select [OK], then press <SET> to go to step 6.
- To change the name of the settings, select [Settings name] and press <SET>.
- ▶ The virtual keyboard is displayed (p.14). Up to 30 characters can be entered for a settings name.

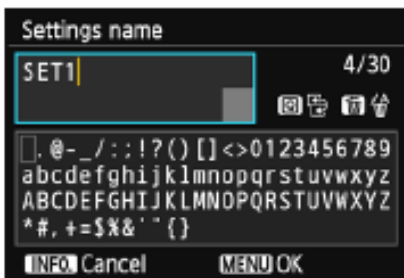

#### 6 Save the settings.

- Select [OK] and press <SET> to save the settings.
- ▶ The [□Connection] screen will be displayed.



The settings for networking with the smartphone are now complete.