




## Product Specifications

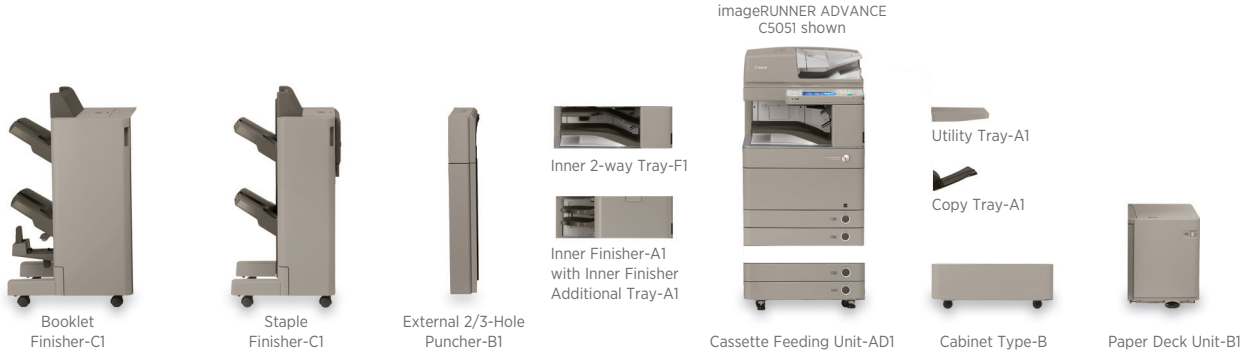

### Main Unit

#### System Type

Color Digital Multifunction Imaging System

#### Functions

Standard: Copy, Print (UFR II), Scan, Send, Store

Optional: Print (PCL, Adobe® PostScript® 3™), Fax (Up to 4 Lines)

#### Operation Panel

8.4" SVGA Full-color, TFT Screen

#### Memory

Standard: 2GB RAM

Maximum: 2.5GB RAM

#### Hard Disk Drive

Standard: 80GB

Maximum: 250GB

#### Mirroring Hard Disk Drive

Optional (80GB, 250GB) Method: RAID1

#### Network Interface Connection

Standard: 10/100/1000Base-TX

Optional: Wireless LAN (IEEE 802.1x)

#### Other Interface

Standard: USB 2.0 (Host)x2, USB 2.0 (Device)

Optional: Device Port [USB 2.0 (Host)x2], Serial Interface, Copy Control Interface

#### Copy/Print Speed (BW/Color)

Letter: C5051: Up to 51/51 ppm  
C5045: Up to 45/45 ppm  
C5035: Up to 35/35 ppm  
C5030: Up to 30/30 ppm

Legal/11" x 17": C5051/C5045: Up to 26/26 ppm  
C5035/C5030: Up to 18/18 ppm

#### Paper Sources (20 lb. Bond)

Standard: Dual 550-sheet Cassettes  
100-sheet Stack Bypass

Optional: Dual 550-sheet Cassettes  
2,700-sheet Paper Deck

Maximum: 5,000 Sheets

#### Output Paper Capacity (20 lb. Bond)

Standard: 250 Sheets (Inner Tray)

Maximum: 3,100 Sheets (with Staple Finisher or Booklet Finisher)

#### Output Paper Sizes

Cassettes: 12" x 18",\* 11" x 17",\* Legal, Letter, Letter-R, Statement-R, Executive, Custom Size [5-1/2" x 7-1/8" to 12" x 18" (139.7mm x 182mm to 305mm x 457mm)]

Bypass: 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size [3-7/8" x 5-1/2" to 12-5/8" x 18" (99mm x 140mm to 320mm x 457mm)]

Paper Deck: Letter

Other Options: Envelope Feeder Attachment\*\* (COM10 No.10, Monarch, DL, ISO-B5, ISO-C5) Tab Feeding Attachment Kit\*\*

#### Acceptable Paper Weights

Cassettes: 14 lb. Bond to 110 lb. Index (52 to 209g/m<sup>2</sup>)

Bypass: 14 lb. Bond to 140 lb. Index (52 to 256g/m<sup>2</sup>)

#### Duplexing

Paper Size: Standard Automatic Trayless Duplexing (Executive to 12" x 18")

Paper Weights: 14 lb. Bond to 110 lb. Index (52 to 209g/m<sup>2</sup>)

#### Special Media Support

Tracing, Labels, Transparency, Tab, and Envelopes

#### Warm-up Time

38 Seconds from Power On

C5051/C5045: 18 Seconds from Sleep Mode

C5035/C5030: 15 Seconds from Sleep Mode

#### Power Requirements/Plug

C5051/C5045: 120V AC, 60Hz, 20A/NEMA 5-20P

C5035/C5030: 120V AC, 60Hz, 15A/NEMA 5-15P

#### Power Consumption

C5051/C5045: Maximum: 1,800W; Sleep Mode: 1W

C5035/C5030: Maximum: 1,300W; Sleep Mode: 1W

#### Dimensions (H x W x D)

C5051/C5045: 38-5/8" x 24-3/8" x 29-7/8"

(982mm x 620mm x 760mm)

C5035/C5030: 37" x 24-3/8" x 29"

(938mm x 620mm x 735mm)

#### Installation Space (W x D)

C5051/C5045: 42-1/8" x 52"

(1071mm x 1319mm)

C5035/C5030: 42-1/8" x 49-5/8"

(1071mm x 1259mm)

#### Weight

C5051/C5045: Approx. 379 lb. (172kg)\*\*\*

C5035/C5030: Approx. 342 lb. (155kg)\*\*\*

#### Toner (Estimated Toner Yield @ 5% Coverage)

C5051/C5045: Black: 44,000 Images

Color (C,M,Y): 38,000 Images

C5035/C5030: Black: 36,000 Images

Color (C,M,Y): 27,000 Images



## Main Unit (continued)

### Image Reader Unit

#### Scan Resolution

Up to 600 x 600 dpi

#### Acceptable Originals

Sheet, Book, 3-Dimensional Objects  
[up to 4.4 lb. (2kg)]

#### Maximum Original Size

Up to 11" x 17"

### Document Feeder

#### Scan Method

**C5051/C5045**

Single-pass Duplexing Automatic Document Feeder

**C5035/C5030**

Duplex Automatic Document Feeder

#### Acceptable Originals

Paper Sizes: 11" x 17", Legal, Letter, Letter-R,  
Statement, or Statement-R

Paper Weights: One-sided Scanning: 11 lb. Bond to  
32 lb. Bond (42 to 128g/m<sup>2</sup>)  
Two-sided Scanning: 13 lb. Bond to  
32 lb. Bond (50 to 128g/m<sup>2</sup>)

#### Scan Speed (BW/Color; Letter)

**C5051/C5045**

Simplex: 70/70 ipm (300 dpi)  
70/51 ipm (600 dpi)

Duplex: 100/100 ipm (300 dpi)  
70/51 ipm (600 dpi)

**C5035/C5030**

Simplex: 46/46 ipm (300 dpi)  
46/46 ipm (600 dpi)

Duplex: 17.5/17.5 ipm (300 dpi)  
17.5/17.5 ipm (600 dpi)

#### Paper Capacity (20 lb. Bond)

**C5051/C5045** 150 Sheets

**C5035/C5030** 100 Sheets

### Copy Specifications

#### First-Copy-Out Time (Letter)

**C5051/C5045**

BW: 4.0 Seconds

Color: 6.5 Seconds

**C5035/C5030**

BW: 5.5 Seconds

Color: 8.9 Seconds

#### Multiple Copies

1 to 999

#### Color Mode

Auto Color, Full Color, Black, Single Color, Two Colors

#### Copy Exposure

Automatic or Manual (9 levels)

#### Magnification

25% - 400% (1% increments)

#### Preset Reductions

25%, 50%, 64%, 73%, 78%

#### Preset Enlargements

121%, 129%, 200%, 400%

### Basic Copy Features

Preset R/E Ratios by Area, Finishing, Two-sided,  
Exposure Adjustment, Original Type Selection, Interrupt  
Mode, Sample Set, Setting Confirmation/Cancel,  
Standard Keys, Reset, Guide Display, Job Duration  
Display, Reserved Copying

### Special Copy Features

Two-page Separation, Cover/Sheet Insertion, Booklet,  
Transparency Interleaving, Shift, Margin, Frame Erase,  
Image Combination, Different-size Original, Job Build,  
Job Done Notice, Scan Image Check, Mode Memory,  
Recall, Negative/Positive Inversion, Image Repeat,  
Mirror Image, Sharpness, Tab Paper Creation, Form  
Composition, Secure Watermark, Page Numbering,  
Copy Set Numbering, Watermark and Date, Job Block  
Combination, Store in User Inbox

### Print Specifications

#### Processor

Canon Dual Custom Processor (Shared)

#### Memory

Standard: 2GB RAM

Maximum: 2.5GB RAM

#### Hard Disk Drive

Standard: 80GB

Maximum: 250GB

#### Maximum Engine Resolution

1200 x 1200 dpi

#### PDL Support

Standard: UFR II

Optional: PCL 5c, PCL 6, Adobe PS 3

#### Print Driver Supported OS

UFR II: Windows® (Windows 2000/  
XP/Server 2003/Server 2008/  
Windows Vista®, Windows 7), Citrix  
MetaFrame, Macintosh® (OS X 10.4.9  
or later)

PCL 5c/6: Windows (Windows 2000/  
XP/Server 2003/Server 2008/  
Windows Vista, Windows 7), Citrix  
MetaFrame

Adobe PS 3: Windows (Windows 2000/  
XP/Server 2003/Server 2008/  
Windows Vista, Windows 7), Citrix  
MetaFrame, Macintosh (OS X 10.4.9  
or later)

XPS: Windows Vista, Windows Server  
2008, Windows 7

#### Direct Print Support

Standard: TIFF, JPEG, EPS<sup>†</sup>

Optional: PDF, XPS<sup>†</sup>

#### Print Features

Suspend Job Timeout, Feature, Subset Finishing  
(PS only), Profile Settings, Secured Print, Watermark,  
Page Border, Header/Footer, Page Layout, Two-sided  
Printing, Collating, Booklet Printing, Grouping, Mixed  
Paper Sizes/Orientations, Offsetting, Printing on  
Transparencies, Front/Back Covers, Black-and-White  
Printing, Objective, Color/Black-and-White Auto Detect,  
Toner Reduction, Poster Printing, PANTONE® named  
Color Profiles<sup>†</sup>

### Scan Specifications

#### Network TWAIN Scan

Standard

#### Network Scan Utility

Color Network ScanGear

### Universal Send Specifications

#### Sending Method

E-Mail, I-Fax, File Server (FTP, SMB, WebDAV), User  
Inbox, Super G3 Fax (Optional)

#### Color Mode

Auto Color Select (Full Color, Grayscale), Auto Color  
Select (Full Color, B/W), Full Color, Grayscale, B/W

#### Scan Resolution

600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi,  
200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi,  
150 x 150 dpi, 100 x 100 dpi

#### Address Book Capacity

Max. 1,800 Destinations (incl. 200 One-Touch Buttons)

#### Communication Protocol

File: FTP (TCP/IP), SMB (TCP/IP),  
NCP (IPX), WebDAV

E-mail/I-Fax: SMTP, POP3, I-Fax (Simple, Full)

#### File Format

Standard: TIFF, JPEG, PDF, PDF (Compact), PDF  
(Apply Policy), PDF (Optimize for  
Web), PDF/A-1b, XPS, XPS (Compact)

Optional: PDF (Trace & Smooth), PDF/XPS  
(OCR), PDF (Encrypted), PDF/XPS  
(Digital Signature), PDF (Reader  
Extensions), Office Open XML (OCR)

#### I-Fax Data Format

B/W TIFF (MH, MR, MMR)

Color: TIFF (Profile-C)

### Fax Specifications

#### Maximum Number of Connection Lines

4

#### Modem Speed

Super G3: 33.6 Kbps

G3: 14.4 Kbps

#### Compression Method

MH, MR, MMR, JBIG

#### Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi,  
200 x 100 dpi

#### Sending/Recording Size

Statement to 11" x 17"

#### Fax Features

Job Forwarding, Different-size Originals, Adjusting  
Overall Density for Scanning, Sharpness, Copy Ratio,  
Erase Frame, Job Build, Specifying the Sender's Name  
(when sending fax), Selecting the Telephone Line  
(when sending fax), Delayed Send, Preview, Finished  
Stamp, Job Done Notice, Original Type, Two-sided  
Original, Book to Two Pages



## Main Unit (continued)

### Store Specifications

|                                       |   |
|---------------------------------------|---|
| <b>Mail Box</b>                       |   |
| No. Supported:                        | 100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes  |
| Max. Pages Stored:                    | 6,000   |
| <b>Advanced Box</b>                   |   |
| Available Disk Space:                 | Approx. 10GB (Standard HDD)<br>113GB (250GB HDD)  |
| Communication Protocol:               | SMB or WebDAV   |
| Supported Client PC:                  | Windows (Windows 2000/XP/Windows Vista)   |
| Max. Number of Concurrent Connection: | SMB: 32, WebDAV: 12 (Active Sessions)   |
| Advanced Box Features:                | Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support |
| <b>Memory Media</b>                   |   |
| Standard:                             | USB Memory  |
| Optional:                             | SD, SDHC, CompactFlash, Memory Stick, Microdrive  |

### Security Specifications

|   |  |
|---|--|
| <b>Standard</b>   |  |
| Department ID Management, Single Sign-On H, Access Management System (Device and Function Level Log-in), Secured Print, Trusted Platform Module, User Access Control of Advanced Box, Mail Box Password Protection, IPV6, Restricting Features (Restricting the Send Function, Restricting New Addresses on Address Book), SSL Encrypted Communication, SNMPv1/v3, MAC/IP Address Filtering, SMTP Authentication, POP Authentication before SMTP, HDD Format, Adobe® LiveCycle® Rights Management ES2 Integration |  |
| <b>Optional</b>   |  |
| Removable HDD, HDD Erase, HDD Encryption/Mirroring, Encrypted Secure Print, Encrypted PDF, Document Scan Lock, IPsec, Secure Watermark, IEEE2600.1 Common Criteria Certification <sup>o</sup>   |  |

### Environmental Information

ENERGY STAR® Qualified, RoHS Compliant, Ecomark, Blue Angel, WEEE Directive

## Optional Accessories

### Paper Supply Options

|   |   |
|---|---|
| <b>Cassette Feeding Unit-AD1</b>        |   |
| Paper Capacity:                         | 550 Sheets x 2 Cassettes (20 lb. Bond)  |
| Acceptable Paper Weight:                | 14 lb. Bond to 110 lb. Index (52 to 209g/m <sup>2</sup> )   |
| Acceptable Paper Size:                  | 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, and Custom Size [5-1/2" x 7-3/16" to 12" x 18" (139.7mm x 182mm to 305mm x 457mm)] |
| Power Source:                           | From Main Unit/Approx. 30W  |
| Maximum Power Consumption:              | Approx. 30W   |
| Dimensions (H x W x D):                 | 9-7/8" x 24-3/8" x 27-5/8" (251mm x 620mm x 700mm)  |
| Weight:                                 | Approx. 60.6 lb. (27.5kg)   |
| <b>Paper Deck Unit-B1**</b>             |   |
| Paper Capacity:                         | 2,700 Sheets (20 lb. Bond)  |
| Acceptable Paper Weight:                | 14 lb. Bond to 28 lb. Bond (52 to 105g/m <sup>2</sup> )   |
| Acceptable Paper Size:                  | Letter  |
| Power Source/Maximum Power Consumption: | From Main Unit/Approx. 45W  |
| Dimensions (H x W x D):                 | 18-5/8" x 14-5/8" x 23-3/4" (473mm x 372mm x 603mm)   |
| Weight:                                 | Approx. 81.6 lb. (37kg)   |
| <b>Envelope Feeder Attachment-D1**</b>  |   |
| Paper Capacity:                         | 50 Sheets (or 30mm in height)   |
| Acceptable Envelope Sizes:              | COM10 No.10, Monarch, DL, ISO-B5, ISO-C5  |
| Feeding Speed:                          | 10 cpm  |
| Dimensions (H x W x D):                 | 3-1/4" x 17-1/4" x 12-1/8" (81mm x 439mm x 307mm)   |
| Weight:                                 | Approx. 2.6 lb. (1.2kg)   |
| <b>Copy Tray-J1***</b>                  |   |
| Total Output Capacity:                  | 100 Sheets (20 lb. Bond)  |
| Acceptable Paper Weight:                | 14 lb. Bond to 110 lb. Index (52 to 209g/m <sup>2</sup> )   |
| Acceptable Paper Size:                  | 11" x 17", Legal, Letter, Letter-R, Statement-R and Executive   |
| Dimensions (H x W x D):                 | 5-5/8" x 14-3/8" x 14-3/4" (144mm x 365mm x 373mm) (when Auxiliary Tray is extended)  |
| Weight:                                 | Approx. 1 lb. (438g)  |

### Output Options

|                                      |  |
|--------------------------------------|--|
| <b>Inner 2-Way Tray-F1*</b>          |  |
| Number of Trays:                     | 2  |
| Total Output Capacity:               | <b>Top Tray:</b> 250 Sheets (20 lb. Bond)<br><b>Lower Tray:</b> 100 Sheets (20 lb. Bond)   |
| Acceptable Paper Weight:             | 14 lb. Bond to 140 lb. Index (52 to 256g/m <sup>2</sup> )  |
| Acceptable Paper Size:               | 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size [3-7/8" x 5-1/2" to 12-5/8" x 18" (99mm x 140mm to 320mm x 457mm)] and Envelopes   |
| Dimensions (H x W x D):              | 3" x 16-3/4" x 16" (76mm x 426mm x 407mm)  |
| Weight:                              | Approx. 1.3 lb. (574g)   |
| <b>Inner Finisher-A1</b>             |  |
| Number of Trays:                     | Up to 2 Trays (with Inner Finisher Additional Tray-A1)   |
| Total Output Capacity:               | <b>Without Inner Finisher Additional Tray-A1:</b> 500 Sheets<br><b>With Inner Finisher Additional Tray-A1:</b> <b>Top Tray:</b> 100 Sheets (Letter)<br><b>Lower Tray:</b> 200 Sheets (Letter)  |
| Acceptable Paper Weight:             | 14 lb. Bond to 140 lb. Index (52 to 256g/m <sup>2</sup> )  |
| Acceptable Paper Size:               | 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Custom Size [3-7/8" x 5-9/16" to 12-5/8" x 18" (99mm x 140mm to 320mm x 457mm)] and Envelopes  |
| Staple Positions:                    | <b>Corner Stapling:</b> 11" x 17", Legal, Letter, Letter-R<br><b>Double Stapling:</b> 11" x 17", Legal, Letter, Letter-R   |
| Max. Stapling Capacity:              | <b>Letter:</b> 50 Sheets (14 lb. Bond - 21 lb. Bond) 30 Sheets (22 lb. Bond - 28 lb. Bond) 2 Sheets (29 lb. Bond - 140 lb. Index)<br><b>11" x 17", Legal, Letter-R:</b> 30 Sheets (14 lb. Bond - 21 lb. Bond) 20 Sheets (22 lb. Bond - 28 lb. Bond) 2 Sheets (29 lb. Bond - 140 lb. Index) |
| Paper Capacity of Staple Mode:       | <b>Top Tray:</b> 3/8" in Height<br><b>Lower Tray:</b> 30 Sets (or 2-1/2" in Height)  |
| Type of Staple:                      | Staple-J1 (5,000 x 3)  |
| Power Source/Max. Power Consumption: | From Main Unit/Approx. 50W   |
| Dimensions (H x W x D):              | 9-1/4" x 34-1/8" x 21-1/4" (234mm x 865mm x 540mm) (when Auxiliary Tray is extended)   |
| Weight:                              | Approx. 28.7 lb. (13kg) (when Inner Finisher Additional Tray-A1 is attached)   |



## Optional Accessories (continued)

### Staple Finisher-C1

|                                      |   |
|--------------------------------------|---|
| Number of Trays:                     | 2   |
| Total Output Capacity:               | 3,000 Sheets<br>(Letter, Statement-R, Executive)<br><b>Top Tray:</b><br>1,300 Sheets (Letter, Statement-R, Executive)<br>650 Sheets (11" x 17", Legal, Letter-R)<br><b>Lower Tray:</b><br>1,700 Sheets (Letter, Statement-R, Executive)<br>650 Sheets (11" x 17", Legal, Letter-R)  |
| Acceptable Paper Weight:             | 14 lb. Bond to 140 lb. Index (52 to 256g/m <sup>2</sup> )   |
| Acceptable Paper Size:               | 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, <b>AA</b> Statement-R, Executive, and Envelopes   |
| Staple Positions:                    | <b>Corner Stapling:</b><br>11" x 17", Legal, Letter, Letter-R, Executive<br><b>Double Stapling:</b><br>11" x 17", Legal, Letter, Letter-R, Executive  |
| Max. Stapling Capacity               | <b>Letter, Executive:</b><br>50 Sheets (14 lb. Bond to 21 lb. Bond)<br>30 Sheets (22 lb. Bond to 28 lb. Bond)<br>2 Sheets (29 lb. Bond to 140 lb. Index)<br><b>11" x 17", Legal, Letter-R:</b><br>30 Sheets (14 lb. Bond to 21 lb. Bond)<br>20 Sheets (22 lb. Bond to 28 lb. Bond)<br>2 Sheets (29 lb. Bond to 140 lb. Index) |
| Paper Capacity of Staple Mode:       | <b>Top Tray:</b><br>1,300 Sheets/30 Sets (Letter, Executive)<br>650 Sheets/30 Sets (11" x 17", Legal, Letter-R)<br><b>Lower Tray:</b><br>1,700 Sheets/30 Sets (Letter, Executive)<br>650 Sheets/30 Sets (11" x 17", Legal, Letter-R)  |
| Type of Staple:                      | Staple-J1 (5,000 x 3)   |
| Power Source/Max. Power Consumption: | From Main Unit/Approx. 117W (when External 2/3-Hole Puncher-B1 is attached)   |
| Dimensions (H x W x D):              | 43-1/4" x 26-5/8" x 25-1/2"<br>(1097mm x 677mm x 646mm)<br>(when Auxiliary Tray is extended)  |
| Weight:                              | Approx. 101 lb. (46kg)  |

### Booklet Finisher-C1

|   |   |
|---|---|
| Number of Trays:                        | 2   |
| Total Output Capacity:                  | 3,000 Sheets<br>(Letter, Statement-R, Executive)<br><b>Top Tray:</b><br>1,300 Sheets (Letter, Statement-R, Executive)<br>650 Sheets (11" x 17", Legal, Letter-R)<br><b>Lower Tray:</b><br>1,700 Sheets (Letter, Statement-R, Executive)<br>650 Sheets (11" x 17", Legal, Letter-R)  |
| Acceptable Paper Weight:                | 14 lb. Bond to 140 lb. Index (52 to 256g/m <sup>2</sup> )   |
| Acceptable Paper Size:                  | 12" x 18", 11" x 17", Legal, Letter, Letter-R, Statement, <b>AA</b> Statement-R, Executive, and Envelopes   |
| Staple Positions:                       | <b>Corner Stapling:</b><br>11" x 17", Legal, Letter, Letter-R, Executive<br><b>Double Stapling:</b><br>11" x 17", Legal, Letter, Letter-R, Executive<br><b>Saddle-stitch:</b><br>12" x 18", 11" x 17", Legal, Letter-R  |
| Max. Stapling Capacity                  | <b>Letter, Executive:</b><br>50 Sheets (14 lb. Bond to 21 lb. Bond)<br>30 Sheets (22 lb. Bond to 28 lb. Bond)<br>2 Sheets (29 lb. Bond to 140 lb. Index)<br><b>11" x 17", Legal, Letter:</b><br>30 Sheets (14 lb. Bond to 21 lb. Bond)<br>20 Sheets (22 lb. Bond to 28 lb. Bond)<br>2 Sheets (29 lb. Bond to 140 lb. Index) |
| Paper Capacity of Staple Mode:          | <b>Top Tray:</b><br>1,300 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)<br><b>Lower Tray:</b><br>1,700 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)  |
| Max. Saddle-stitch Capacity:            | 16 Sheets (14 lb. Bond to 20 lb. Bond) (12" x 18", 11" x 17", Legal, Letter-R)<br>10 Sheets (22 lb. Bond to 28 lb. Bond) (12" x 18", 11" x 17", Legal, Letter-R)  |
| Paper Capacity of Saddle-stitch Mode:   | 25 Booklets (5-sheet Booklets)  |
| Type of Staple:                         | Staple Cartridge-D2 (2,000 x 3)   |
| Power Source/Maximum Power Consumption: | From Main Unit/Approx. 117W (when External 2/3-Hole Puncher-B1 is attached)   |
| Dimensions (H x W x D):                 | 43-1/4" x 31-1/8" x 25-1/2"<br>(1097mm x 789mm x 646mm)<br>(when Auxiliary Tray is extended)  |
| Weight:                                 | Approx. 165 lb. (75kg)  |

### External 2/3-Hole Puncher-B1<sup>AAA</sup>

|                                |   |
|--------------------------------|---|
| Acceptable Punch Paper Weight: | 14 lb. Bond to 140 lb. Index (52 to 256g/m <sup>2</sup> ) |
| Acceptable Punch Paper Size:   | 11" x 17", Legal, Letter, Letter-R                        |
| Punch Type:                    | 2 Holes (Legal, Letter-R)<br>3 Holes (Letter, 11" x 17")  |
| Distance between Punch Holes:  | 2 Holes: 2-3/4" (70mm)<br>3 Holes: 4-1/4" (108mm)         |
| Punch Waste Tray Capacity:     | Approx. 2,500 Sheets (20 lb. Bond)                        |
| Power Source:                  | From Main Unit  |
| Dimensions (H x W x D):        | 35-3/4" x 4-1/4" x 24-1/2"<br>(908mm x 107mm x 623mm)     |
| Weight:                        | Approx. 15.9 lb. (7.2kg)                                  |

### Print Controller Options

#### imagePASS-B1<sup>■</sup>

|                            |  |
|----------------------------|--|
| Type                       | Embedded   |
| Connectable Devices:       | imageRUNNER ADVANCE C5051/C5045/C5035/C5030  |
| Processor:                 | Intel® Celeron® M440 1.88GHz   |
| System:                    | System 8e Release2   |
| Memory:                    | Standard: 512MB<br>Maximum: 1GB  |
| Hard Disk:                 | 80GB   |
| DVD-ROM:                   | N/A  |
| Interface Connections:     | 10/100/1000Base-T (RJ-45)  |
| PDL Support:               | Adobe PS 3/PCL 5c/PCL 6  |
| Print Resolution:          | 1200 x 1200 dpi<br>2400 dpi Equivalent x 600 dpi   |
| Print Driver Supported OS: | <b>Adobe PS 3:</b> Windows (Windows 2000/XP/Server 2003/Server 2008/Windows Vista), Macintosh (OS X 10.3.9 or later)<br><b>PCL 5c/6:</b> Windows (Windows 2000/XP/Server 2003/Windows Vista) |
| Utility Software:          | Remote Scan 5.3, Command WorkStation <sup>®</sup> for Windows, Command WorkStation for Mac, Web Tools  |
| Standard Features:         | Auto Trapping, Paper Catalog   |
| EFI Options:               | Hot Folder v2.0, Secure Erase V1.1, SeeQuence Suite, SeeQuence Impose, SeeQuence Compose, 512MB Optional Memory, X-Rite Eye-One  |



# C5051 / C5045 C5035 / C5030

## Optional Accessories (continued)

### ColorPASS-GX300<sup>■</sup>

|                            |   |
|----------------------------|---|
| Type:                      | External  |
| Connectable Devices:       | imageRUNNER ADVANCE C5051   |
| Processor:                 | Intel® Core™2 Duo, Xeon E8400<br>2 x 3.0GHz FSB 1333MHz   |
| System:                    | System 9 Release2   |
| Memory:                    | Standard: 2GB<br>Maximum: 2GB   |
| Hard Disk:                 | 160GB   |
| DVD-ROM:                   | Standard (DVD-RW)   |
| Interface Connections:     | 10/100/1000Base-T (RJ-45)   |
| PDL Support:               | Adobe PS 3  |
| Print Driver Supported OS: | Windows (Windows 2000/XP/<br>Server 2003/Server 2008/Windows<br>Vista), Macintosh (OS X 10.3.9<br>or later)   |
| Print Resolution:          | 1200 x 1200 dpi,<br>2400 dpi Equivalent x 600 dpi   |
| Utility Software:          | Remote Scan 5.3, Command<br>WorkStation® for Windows,<br>Command WorkStation for Mac,<br>WebTools   |
| Standard Features:         | Auto Trapping, Paper Catalog,<br>Hot Folders, Virtual Printers,<br>Secure Erase   |
| EFI Options:               | Integrated Interface and Stand,<br>X-Rite Eye-One, SeeQuence Suite,<br>SeeQuence Impose, SeeQuence<br>Compose, Removable Hard Disk<br>Drive Kit, Graphic Arts Feature Set<br>Premium v2.2 |
| Dimensions (H x W x D):    | 19-1/8" x 8-1/2" x 19-1/8"  |
| Weight:                    | Approx. 43.5 lb.  |

## Other Optional Accessories

Cabinet Type-B<sup>■</sup>  
 Inner Finisher Additional Tray-A1  
 Tab Feeding Attachment Kit-B1<sup>\*\*</sup>  
 Utility Tray-A1  
 USB Keyboard  
 Key Switch Unit-A2  
 Card Reader-C1<sup>■</sup>  
 Copy Card Reader Attachment Kit-B1  
 Braille Label Kit  
 ADF Access Handle-A1  
 Stamp Ink CRG-C1  
 Stamp Unit-B1  
 imageRUNNER ADVANCE Essentials  
 Universal Send Advanced Feature Set-D1  
 Universal Send Security Feature Set-D1  
 Universal Send Digital User Signature Kit-C1  
 Super G3 Fax Board-AE1  
 Super G3 2nd Line Fax Board-AE1<sup>•</sup>  
 Super G3 3rd/4th Line Fax Board-AE1<sup>••</sup>  
 Remote Fax Kit-A1<sup>•••</sup>  
 PS Printer Kit-AE1<sup>■</sup>  
 PCL Printer Kit-AE1  
 Direct Print Kit (for PDF/XPS)-H1<sup>■</sup>  
 Encrypted Secure Print-D1  
 Barcode Printing Kit-D1<sup>\*</sup>  
 Web Access Software-H1<sup>♦♦</sup>  
 Secure Watermark-B1  
 Wireless LAN Board-B1<sup>♦♦♦</sup>  
 USB Device Port-B1  
 Multimedia Reader/Writer-A1<sup>\*</sup>  
 Additional Memory Type B (512MB)  
 Document Scan Lock Kit-A1  
 Data Erase Kit-C1  
 HDD Data Encryption and Mirroring Kit-C1  
 Removable HDD Kit-AC1  
 2.5-inch/80GB HDD-C1<sup>♦♦</sup>  
 2.5-inch/250GB HDD-D1  
 IPsec Board-B2<sup>♦♦♦</sup>  
 Expansion Bus-F1  
 Voice Guidance Kit-F1<sup>♦♦♦</sup>  
 Voice Operation Kit-C1<sup>♦♦♦</sup>  
 Remote Operator's Software Kit-B1  
 Copy Control Interface Kit-A1<sup>°</sup>  
 eCopy Suite  
 imageWARE Suite  
 iR-ADV Security Kit-A1 for IEEE2600.1  
 Common Criteria Certification<sup>°°</sup>

- \* Not available in top cassette.
  - \*\* Installs on Cassette 2. Cannot install Envelope Feeder Attachment and Tab Feeding Attachment Kit at same time.
  - \*\*\* Includes consumables.
  - ▲ Requires the Canon PS Printer Kit-AE1.
  - † EPS and XPS cannot be printed directly from Memory Media or Advanced Box.
  - †† Cannot be installed with Cabinet Type-B.
  - ††† Cannot be installed with Booklet Finisher-C1 or Staple Finisher-C1.
  - ▲ Cannot be installed with Booklet Finisher-C1, Staple Finisher-C1, or Inner Finisher-A1.
  - ▲▲ Statement cannot be used when the External 2/3-Hole Puncher-B1 is attached.
  - ▲▲▲ External 2/3-Hole Puncher-B1 can only be installed with either the Staple Finisher-C1 or Booklet Finisher-C1.
    - Requires Additional Memory Type B (512MB).
    - Cannot be installed when Cassette Feeding Unit-AD1 is installed.
  - Requires Copy Card Reader Attachment Kit-B1.
    - Requires Super G3 Fax Board-AE1.
    - Requires Super G3 Fax Board-AE1 and Super G3 2nd Line Fax Board-AE1.
    - Cannot be installed with Super G3 Fax Board-AE1.
      - ♦ Requires PCL Printer Kit-AE1.
    - ♦♦ Requires PS Printer Kit-AE1 or Direct Printer Kit (for PDF/XPS)-H1 for printing PDF files.
    - ♦♦♦ Requires Expansion Bus-F1.
      - ♦ Requires Device Port-B1.
      - ♦♦ 80GB HDD for Mirroring functionality only, cannot be used to increase storage.
      - ♦♦♦ Voice Operation Kit-C1 and Voice Guidance Kit-F1 cannot be installed together.
      - ° Cannot be installed with Serial Interface Kit-K1 or Card Reader-C1
      - °° Specified configurations and settings need to be applied to the device in order to achieve and maintain IEEE2600.1 Common Criteria Certification. Contact your Authorized Canon Dealer for more information.
- NOTE: Some accessories require additional equipment or may be prerequisites for other options. Some accessories cannot be installed simultaneously. Check with your Authorized Canon Dealer for details.

**Canon**  
image*ANYWARE*

1-800-OK-CANON  
www.usa.canon.com

Canon U.S.A., Inc.  
One Canon Plaza  
Lake Success, NY 11042

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. PANTONE and other Pantone, LLC trademarks are the property of Pantone, LLC. CANON, IMAGERUNNER, IMAGEPASS, COLORPASS, MEAP, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All other referenced product names and marks are trademarks of their respective owners and are hereby acknowledged. Some items may not be available at this time; please check for availability. Specifications and availability subject to change without notice.

©2011 Canon U.S.A., Inc. All rights reserved.

Federal Law prohibits copying of certain documents. Violators may be subject to penalties. We suggest that you check with your own legal counsel. Canon U.S.A., Inc. and Canon Canada, Inc. intend to cooperate with Law Enforcement Agencies in connection with claims of unauthorized copying.

0611R-C5000SS-PDF-NR

