

Canon



CORPORATE SOLUTIONS



 **imageRUNNER®**
5075

meap
POWERED BY I

ALL THE TOOLS YOU NEED FOR PROFESSIONAL RESULTS

The Canon imageRUNNER® 5075 device has been infused with the latest Canon technology and security advancements to meet the expanding needs of today's high-volume departments and light production environments. Powered by Canon's imageCHIP system architecture, this next-generation imageRUNNER device is designed to provide exceptional performance and reliability. With a choice of high-capacity paper supply and advanced finishing options to meet every application and budget, the versatile imageRUNNER 5075 device enables every employee to produce professional-quality documents with ease.

MAIN UNIT

| | |
|----------------------------|---|
| Type: | Monochrome Digital Multifunction Imaging System |
| Imaging System: | Laser Dry Electrostatic Transfer |
| Developing System: | Dry Mono Component Toner Projection |
| Fixing System: | Induction Heating Fusing System |
| Acceptable Originals: | Sheets, books, and 3-Dimensional objects up to 4.4 lb. |
| Max. Original Size: | 11" x 17" |
| Max. Copy Size: | 11" x 17" |
| Min. Copy Size: | 3/8" x 5/8" (via Stack Bypass) |
| Memory: | Standard 1GB RAM + 40GB HDD (Shared) |
| Max. Copy Reservation: | 20 Jobs |
| Max. Mail Boxes Supported: | 100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes |
| Scan Resolution: | 600 x 600 dpi |
| Copy Resolution: | 1200 x 600 dpi (Interpolated) |
| Engine Resolution: | 1200 x 1200 dpi |
| Halftone: | 256 Gradations of Grey |
| Exposure Control: | Automatic or Manual (9 Levels) |
| Copy/Print Speeds: | Up to 75 ppm (Letter) Up to 37 ppm (11" x 17") Up to 45 ppm (Legal) Up to 58 ppm (Letter-R) |
| First-Copy Time: | 3.1 Seconds from Platen Glass |
| Warm-Up Time: | 30 Seconds or less from Main Power Off or Sleep Mode |
| Multiple Copies: | 1 to 9,999 |
| Document Feeding Method: | 100-Sheet Single Pass Duplex Scan Document Feeder (Standard) |
| Paper Supply | |
| Standard: | Dual Paper Drawers (1,500 Sheets Each) Dual 550-Sheet Paper Cassettes (550 Sheets Each) 50-Sheet Stack Bypass |
| Optional: | 3,500-Sheet Paper Deck |
| Maximum Paper Supply: | 7,650 Sheets |
| Acceptable Paper Sizes | |
| Upper Drawers: | Letter |
| Lower Cassettes: | 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive |
| Stack Bypass: | 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, Free Size (3/8" x 5/8" to 11/8" x 17") |
| Acceptable Paper Weight: | 17 lb. Bond to 110 lb. Index (From All Sources) |
| Duplexing: | Standard Automatic Trayless Duplexing |

| | |
|---|---|
| Magnification | |
| Standard Mode: | 100% |
| Preset Reduction: | 25%, 50%, 64%, 73%, 78% |
| Preset Enlargement: | 121%, 129%, 200%, 400% |
| Zoom Mode: | Platen: 25% - 400% (In 1% Increments) Feeder: 25% - 200% (In 1% Increments) |
| Interface Connections: | 10/100Base-TX (RJ-45), USB 2.0 High Speed |
| Dimensions (H x W x D): | 47 1/2" x 25 3/8" x 29 1/4" (1,207mm x 643mm x 743mm) |
| Weight: | 474 lb. (215 kg) |
| Power Requirements: | 120V AC, 60Hz, 20A |
| Power Consumption: | 1.92kW (Max.) |
| Plug: | NEMA 5-20P |
| Toner (Estimated Yield): | 48,000 Impressions @ 6% Image Coverage |
| Drum (Estimated Yield): | 3,000,000 Impressions |
| Single-Pass Duplex Scan Document Feeder | |
| Acceptable Originals: | Statement to 11" x 17" |
| Acceptable Weights | |
| One-Sided Scanning: | 11 lb. to 32 lb. Bond |
| Two-Sided Scanning: | 13 lb. to 32 lb. Bond |
| Paper Capacity: | 100 Sheets (20 lb. Bond) |
| Original Scanning Speed: | Up to 100 ipm (Letter @ 300 dpi, Two-Sided) Up to 77 ipm (Letter @ 300 dpi, One-Sided) |

Optional Accessories


| | |
|--------------------------|------------------------------|
| Paper Deck-AD1 | |
| Acceptable Paper Size: | Letter |
| Paper Capacity: | 3,500 Sheets (20 lb. Bond) |
| Acceptable Paper Weight: | 17 lb. Bond to 110 lb. Index |
| Dimensions (H x W x D): | 22 3/8" x 12 3/4" x 23" |
| Weight: | Approx. 65.7 lb. |

Paper Deck-AE1

| | |
|--------------------------|------------------------------------|
| Acceptable Paper Size: | 11" x 17", Legal, Letter, Letter-R |
| Paper Capacity: | 3,500 Sheets (20 lb. Bond) |
| Acceptable Paper Weight: | 17 lb. Bond to 110 lb. Index |
| Dimensions (H x W x D): | 22 3/8" x 23 1/2" x 24 1/2" |
| Weight: | Approx. 99.4 lb. |

Finisher-AD1/Saddle Finisher-AD2

| | |
|---------------------------|---|
| Number of Trays: | 3 Trays |
| Acceptable Paper Sizes: | 11" x 17", Legal, Letter, Letter-R, Statement, Statement-R, Executive, Free Size (3/8" x 5/8" to 11/8" x 17") |
| Acceptable Paper Weight: | 17 lb. Bond to 140 lb. Index |
| Tray Capacity | |
| Non-Collate Mode | |
| Tray A: | 250 Sheets (Letter, Statement-R, Executive) 125 Sheets (11" x 17", Legal, Letter-R) |
| Tray B: | 1,300 Sheets (Letter, Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R) |
| Tray C: | 2,450 Sheets (Letter) 1,700 Sheets (Statement-R, Executive) 650 Sheets (11" x 17", Legal, Letter-R) |
| Collate, Group Modes | |
| Tray B: | 1,300 Sheets (Letter, Executive) 650 Sheets (11" x 17", Legal, Letter-R) |
| Tray C: | 1,700 Sheets (Letter, Executive) 650 Sheets (11" x 17", Legal, Letter-R) |
| Staple Mode (Trays B & C) | |
| Tray B, Tray C: | 1,300 Sheets/100 Sets [or 7 7/8" (188.4mm) in Height] (Letter, Executive) 650 Sheets/50 Sets [or 3 3/4" (96mm) in Height] (11" x 17", Legal, Letter-R) |
| Paper Sizes: | 11" x 17", Legal, Letter, Letter-R, Executive |
| Staple Positions: | Any Corner Staple Double Staple in Right or Left Margin Saddle Stitch (Center Staple)* |
| Stapling Capacity: | 50 Sheets (Letter, Executive) 30 Sheets (11" x 17", Legal, Letter-R) |

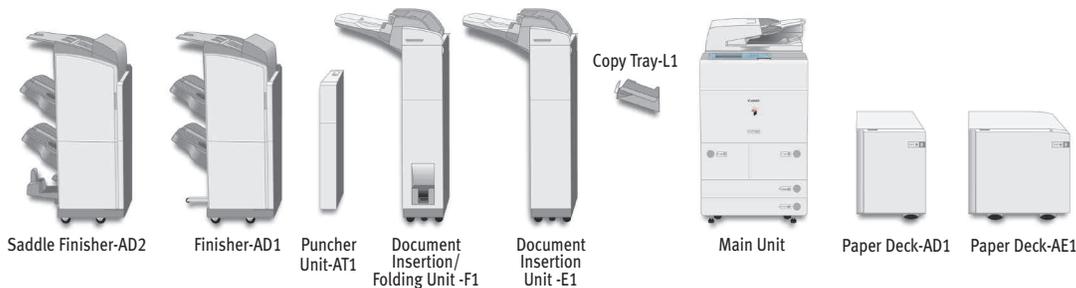

Saddle-Stitching:*

| | |
|-------------------------|--|
| Acceptable Paper Sizes: | 11" x 17", Legal, Letter-R |
| Saddle-Stitch Capacity: | 15 Sheets (60 Page Booklets) |
| Tray Capacity: | 25 Sets (1 to 5 Sheets) 15 Sets (6 to 10 Sheets) 10 Sets (11 to 15 Sheets) |
| Folding: | V-folding |
| Dimensions (H x W x D) | |
| Finisher-AD1: | 44 $\frac{3}{8}$ " x 25 $\frac{1}{2}$ " x 25 $\frac{7}{8}$ " |
| Saddle Finisher-AD1: | 44 $\frac{3}{8}$ " x 25 $\frac{5}{8}$ " x 25 $\frac{7}{8}$ " |
| Weight | |
| Finisher-AD1: | Approx. 106 lb. |
| Saddle Finisher-AD2: | Approx. 155 lb. |
| Attachable Accessories: | Document Insertion Unit-E1 Document Insertion/ Folding Unit-F1 Puncher Unit-AT1 |

Document Insertion Unit-E1 (Option for Finisher-AD1/Saddle Finisher-AD2)

| | |
|--------------------------|--|
| Number of Trays: | 1 |
| Insertion Tray Capacity: | 100 Sheets |
| Acceptable Paper Weight: | 17 lb. Bond to 140 lb. Index |
| Acceptable Paper Sizes: | 11" x 17", Legal, Letter, Letter-R, Executive |
| Dimensions (H x W x D): | 48 $\frac{7}{8}$ " x 26 $\frac{1}{8}$ " x 26 $\frac{3}{4}$ " |
| Weight: | Approx. 88.2 lb. |

Document Insertion/Folding Unit-F1 (Option for Finisher-AD1/Saddle Finisher-AD2)

| | |
|---|--|
| Number of Trays: | 1 |
| Insertion Tray Capacity: | 100 Sheets |
| Acceptable Paper Weight (Insertion): | 17 lb. Bond to 140 lb. Index |
| Acceptable Paper Sizes: (Insertion): | 11" x 17", Legal, Letter, Letter-R, Executive |
| Acceptable Paper Weight (Folding): | 17 lb. - 28 lb. Bond |
| Acceptable Paper Sizes (C-Fold): | Letter-R |
| Acceptable Paper Sizes (Z-Fold): | 11" x 17", Legal, Letter-R |
| Folding Method: | Roller Pressure Folding |
| C-Fold Output Tray Capacity: | 40 Sheets |
| Dimensions (H x W x D): | 48 $\frac{7}{8}$ " x 26 $\frac{1}{8}$ " x 26 $\frac{3}{4}$ " |
| Weight: | Approx. 168 lb. |

Puncher Unit-AT1

| | |
|--|---|
| (Option for Finisher-AD1/Saddle Finisher-AD2) | |
| Acceptable Paper Sizes: | 11" x 17", Legal, Letter, Letter-R |
| Acceptable Paper Weight: | 17 lb. Bond to 110 lb. Index |
| Punch Method: | Sequential Processing System (1 Sheet at a time) |
| Punch Type: | 2 holes: (Legal, Letter-R) 3 holes: (11" x 17", Letter) |
| Punch Waste Capacity: | Approx. 3,000 Sheets |
| Dimensions (H x W x D): | 32 $\frac{3}{4}$ " x 4 $\frac{3}{4}$ " x 24 $\frac{3}{4}$ " |
| Weight: | Approx. 15.9 lb. |

UFR II/PCL/PS Printer Kit-R2

| | |
|----------------------------|--|
| Type: | Embedded Print Controller |
| CPU: | Canon Dual Custom Processors |
| Memory: | 1GB (Standard) (Shared) |
| Hard Disk Drive: | 40GB (Standard) (Shared) |
| Interface Connections: | 10/100Base-TX (RJ-45), USB 2.0 High Speed |
| Supported PDLs: | UFR II, PCL 5e, PCL 6, PS3 Emulation |
| Resolution: | PCL 5e: 2400 x 600 dpi (Interpolated) UFR II/PCL 6/PS3 Emulation: 1200 x 1200 dpi |
| Printer Drivers | |
| UFR II: | Windows® 2000/XP/Server 2003/ Windows Vista™, Citrix MetaFrame, Macintosh® OS X (OS 10.2.8 or Later) |
| PCL 5e/6: | Windows98/Me/2000/XP/ Server 2003/Windows Vista, Citrix MetaFrame |
| PostScript 3: | Windows 98/Me/2000/XP/ Server 2003/Windows Vista, Citrix MetaFrame Macintosh OS X (OS 10.2.8 or Later) |
| Internal Fonts: | PCL: 80 Scalable fonts, 10 Bitmap fonts; PS: 136 Scalable fonts |
| Interface Connections: | 10/100Base-TX (RJ-45), USB 2.0 High Speed |
| Network Operating Systems: | Novell® NetWare® v3.2, 4.1, 4.11, 4.2, 5, 5.1, 6.5 (IPX/SPX) Windows 98/Me/2000/XP/ Server 2003/Windows Vista (TCP/IP) Apple® Macintosh OS 8.0 or Higher (DDP) Solaris™ 1.5x, 2.5x or Later (TCP/IP) |

imagePASS-S2

| | |
|----------------------------|--|
| Type: | External Print Controller |
| CPU: | Intel® Celeron® D @ 2.8GHz |
| Operating System: | System 8e |
| Memory: | 256MB RAM (Standard) 512MB RAM (Maximum) |
| Hard Disk Drive: | 80GB (Standard) |
| Interface Connections: | 10/100/1000Base-TX (RJ-45) |
| Supported PDLs: | Adobe PostScript® 3™, PCL 5e/6 |
| Resolution: | PCL 5e: 2400 x 600 dpi (Interpolated) PCL 6/PS3: 1200 x 1200 dpi** |
| Printer Drivers: | Windows 98/Me/2000/XP Windows NT 4.0/ Server 2003/Windows Vista Citrix MetaFrame Macintosh OS X (OS 10.2 or Later) |
| Internal Fonts: | 136 Adobe Type 1 Roman PS fonts |
| Network Operating Systems: | Apple Macintosh OS 9.1 (PPD), OS X (10.2.8 or Later) Solaris 8.0 or Later Sun OS 4.1.3. or Later Windows 2000/XP/Server 2003/ Windows Vista, Novell NetWare v4.2, 5.1, 6.1 |
| EFI Options: | Hot Folders and Virtual Printers, Impose v2.6, 256 RAM |

Universal Send Kit-F1

| | |
|------------------------|--|
| Address Book Capacity: | Max. 1,800 Destinations Max. 5 LDAP Servers |
| Sending Methods: | Email, I-Fax, File Server (FTP, SMB, IPX, WebDAV), User Inbox, Super G3 (Optional) |
| Scan Resolutions: | 100 x 100 dpi to 600 x 600 dpi, User Selectable |
| Communication Protocol | |
| File: | FTP (TCP/IP), SMB (TCP/IP), NCP (IPX), WebDAV |
| E-Mail/I-Fax: | SMTP, POP3, I-Fax (Simple, Full) |
| Data Format | |
| File/E-mail: | TIFF, PDF, PDF (OCR),*** Encrypted PDF, [†] Digital Device Signature PDF, [†] Digital User Signature PDF ^{††} |
| I-Fax: | TIFF (MH, MR, MMR) |

Super G3 Fax Board-Z2

| | |
|--------------------------|--|
| Applicable Line: | Public Switched Telephone Network (PSTN) |
| Connection Lines: | 1 |
| Sending/Original Size: | Statement to 11" x 17" |
| Receiving/Printing Size: | Statement to 11" x 17" |
| Transmission Times | |
| ECM-MMR: | Approx. 3.2 Seconds/Page |
| G3MR/G3MH: | Approx. 13 Seconds/Page |
| JBIG: | Approx. 2.6 Seconds/Page |
| Auto Dial Function: | Address Book: 1,800 Destinations |

Other Optional Accessories

- Encrypted Secure Print Software-C1^{†††}
- Barcode Printing Kit-A1^{†††}
- Web Access Software-F1[▲]
- Digital User Signature PDF Kit-A1^{▲▲}
- Universal Send Searchable PDF Kit-A1^{▲▲}
- Universal Send PDF Security Feature Set-A1^{▲▲}
- Workflow Composer-B2
- Secure Watermark-A1
- HDD Data Encryption Kit-B2
- HDD Data Erase Kit-A1
- Access Management System Kit-A1
- Expansion Bus Board-D2
- Remote Operator's Software Kit-A2
- Voice Guidance Kit-B1^{▲▲▲}
- Wireless Network Interface Adapter NB-W1^{▲▲▲,○}
- Cassette-AB1 (Replacement)
- Tab Feeding Attachment-B1
- Copy Tray-L1
- Card Reader-C1
- Card Reader Attachment-C2
- Braille Label Kit-A1
- ADF Access Handle-A1
- Stamp Unit Cartridge-C1
- Staple Cartridge-J1
- Staple Cartridge-D2
- eCopy Suite
- imageWARE™ Suite

Footnotes:

- * Available with Saddle Finisher-AD2 only.
- ** 1200 x 1200 dpi resolution for PCL printing is not supported on Win9X/Me Clients.
- *** Requires Universal Send Searchable PDF Kit-A1.
- † Requires Universal Send PDF Security Feature Set-A1.
- †† Requires Digital User Signature PDF Kit-A1.
- ††† Requires UFR II/PCL/PS Printer Kit-R2.
- ▲ Requires UFR II/PCL/PS Printer Kit-R2 for printing Web pages and PDF files.
- ▲▲ Requires Universal Send Kit-F1.
- ▲▲▲ Requires Expansion Bus Board-D2.
- Check for availability.

Canon
image*ANYWARE*

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that this product meets the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Windows, Windows Vista, and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries. Adobe and PostScript are registered trademarks of Adobe Systems Incorporated in the United States and/or other countries. Macintosh and AppleCare are registered trademarks of Apple Computer, Inc. Intel and Celeron are registered trademarks of Intel Corporation. eCopy is a trademark of eCopy, Inc. Novell and NetWare are registered trademarks of Novell, Inc. in the United States and other countries. IPX/SPX is a trademark of Novell, Inc. Solaris and Sun are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. CANON, IMAGERUNNER, and MEAP are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon Inc. in certain other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners. Some products shown with optional accessories and equipment. Specifications and availability are subject to change without notice. ©2013 Canon U.S.A., Inc. All rights reserved.

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Park
Melville, NY 11747

