



# **Installing the Printer to Your Wireless Network**

**imagePROGRAF PRO - 1000**

**Windows**

# Setup and Installation

## Setup and Installation


The instructions contained in this document apply equally to first-time installations, adding the printer to additional computers in the Wireless Network and for re-installations after a Router or Network change.

To use the machine wirelessly with a computer, the printer must be connected to the Wireless LAN and software including the drivers needs to be copied (installed) to the computer's hard disk. Installation time varies depending on the computer environment or the number of application software to be installed.

### **IMPORTANT**


- Log on as the administrator (or a member of the Administrators group).
- Quit all running applications before software installation.
- Do not switch users during the installation process.
- Internet connection may be required during the installation. Connection fees may apply. Consult the internet service provider.
- It may be necessary to restart your computer during the installation process. Follow the on-screen instructions.  
. The installation resumes once your computer has restarted.
- If the firewall function of your security software is turned on, a warning message may appear that Canon software is attempting to access the network. If such a warning message appears, set the security software to always allow access.

# Connecting to the Wireless LAN

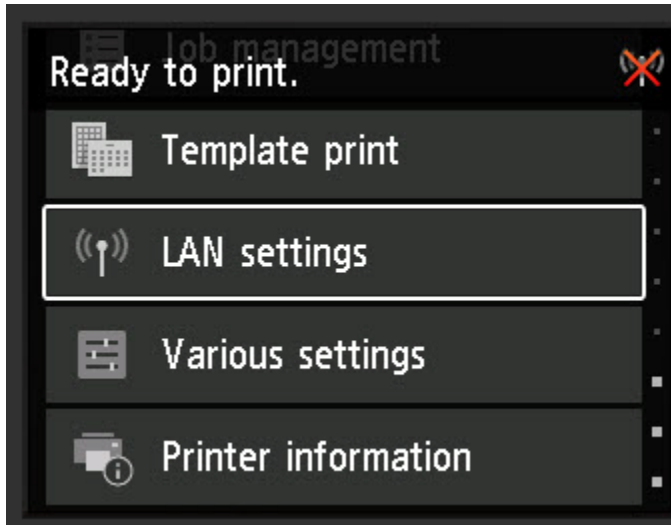


1. From the **Home** screen, press the up or down arrows until **LAN settings** appears. Then press the **OK** button.

# Connecting to the Wireless LAN

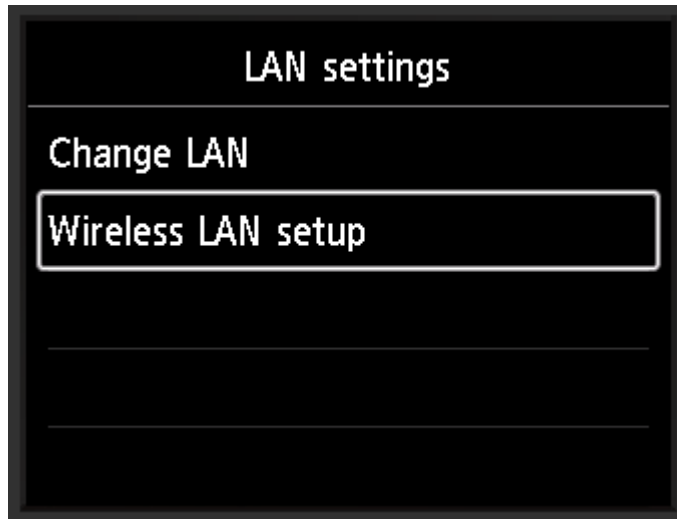

2. Use the down arrow to select **Wireless LAN setup** and press the **OK** button.

# Connecting to the Wireless LAN

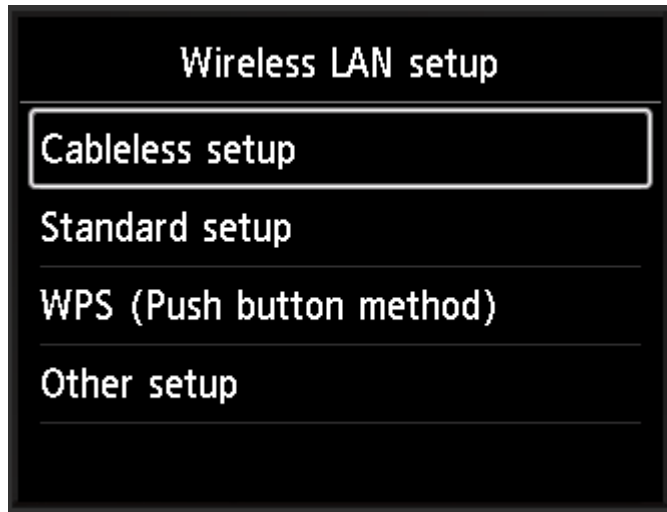

3. Use the arrows to select **Cableless setup** and press the **OK** button.

# Connecting to the Wireless LAN



4. Press the **OK** button when this message appears.

# Connecting to the Wireless LAN



Follow the instructions on the computer or smartphone, etc. to perform the operation.

5. When this screen appears, the printer is waiting to receive the information on the wireless network. Go to the computer.

# Connecting to the Wireless LAN

Insert the Setup CD-ROM into your computer.\*

Click [ Run Msetup4.exe ] on the AutoPlay screen, then click [ Yes ] or [ Continue ] on the User Account Control dialog box.

If the CD-ROM does not autorun:

Double-click [ (My) Computer ] > CDROM icon > [ MSETUP4.EXE. ]



\*If you don't have or cannot use the Setup CD-ROM, follow the steps below to start the setup.


- [Download the software](#) (click the link to download)
- Double-click the downloaded .exe file (win-pro\_1000-1\_0-jucd.exe)

If the **User Account Control** dialog box appears during the setup, click **Yes** or **Continue**.




# Connecting to the Wireless LAN

Click **Start Setup** on the initial screen.

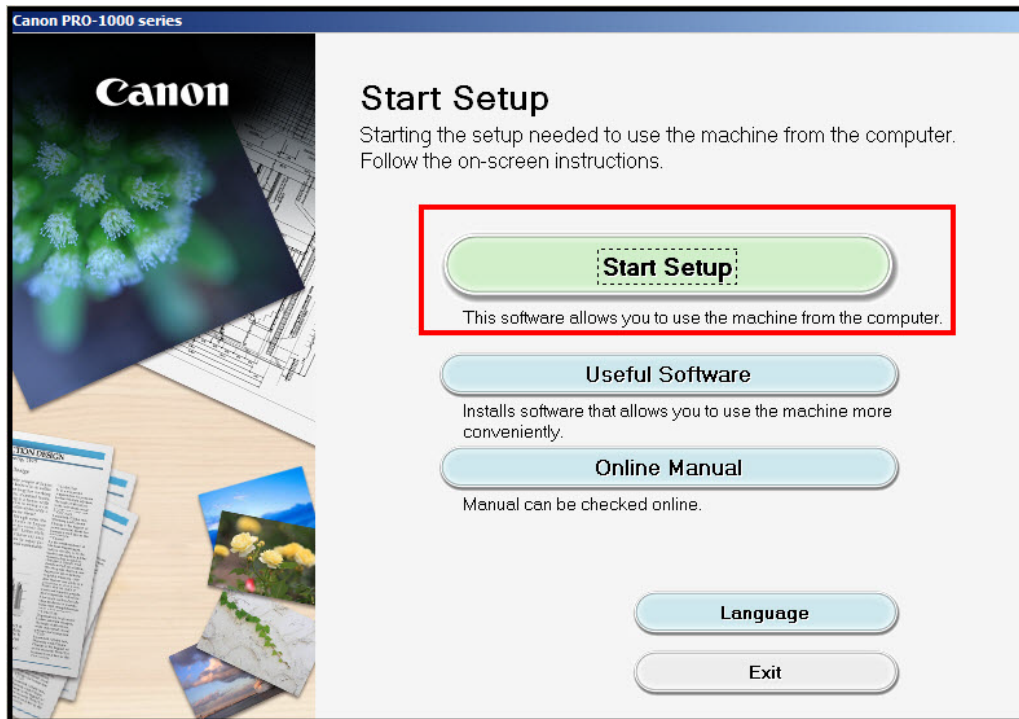


# Connecting to the Wireless LAN

Continue following on-screen instructions to select country, License Agreement, etc. until the **Select Connection Method** screen appears. Be sure to select **Wireless LAN Connection**, then click **Next**..

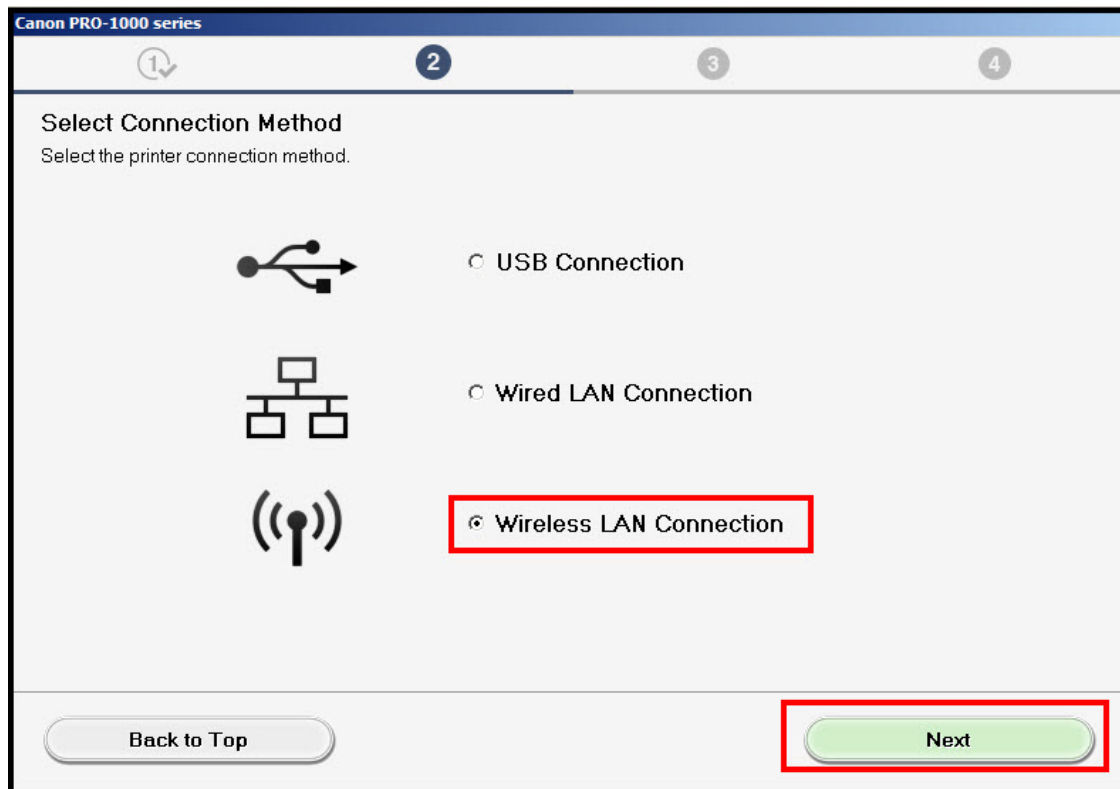


# Connecting to the Wireless LAN

Select **Connect via wireless router (recommended)** then click **Next**.

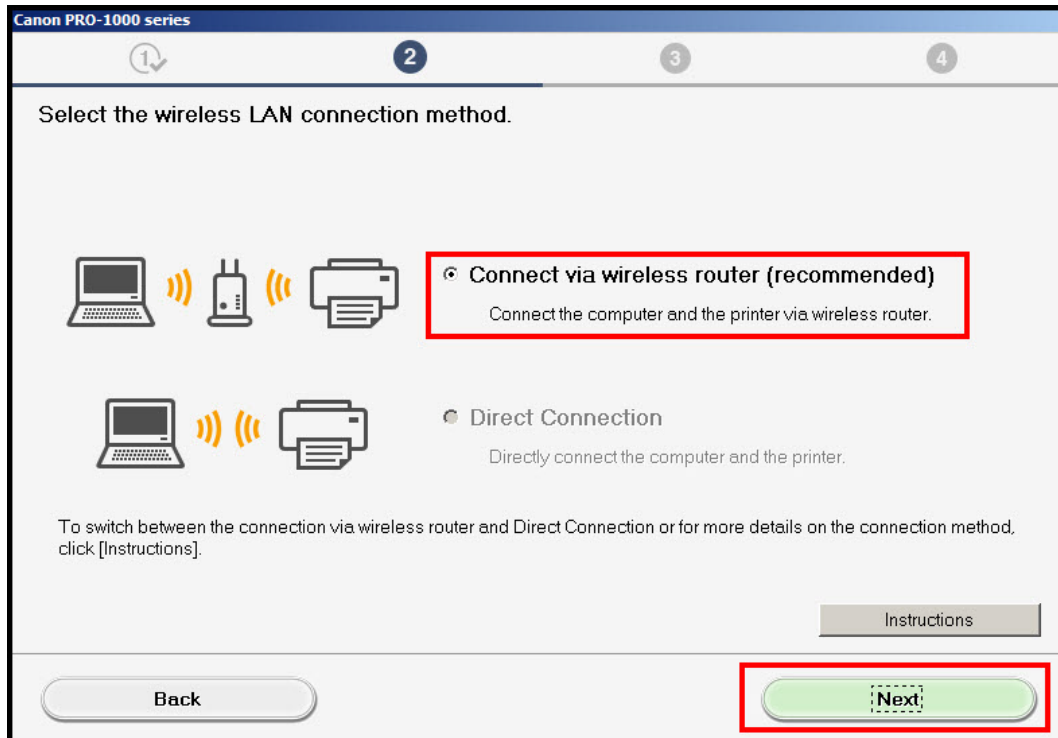

# Connecting to the Wireless LAN

Click **Next** on the **Check Power** screen.

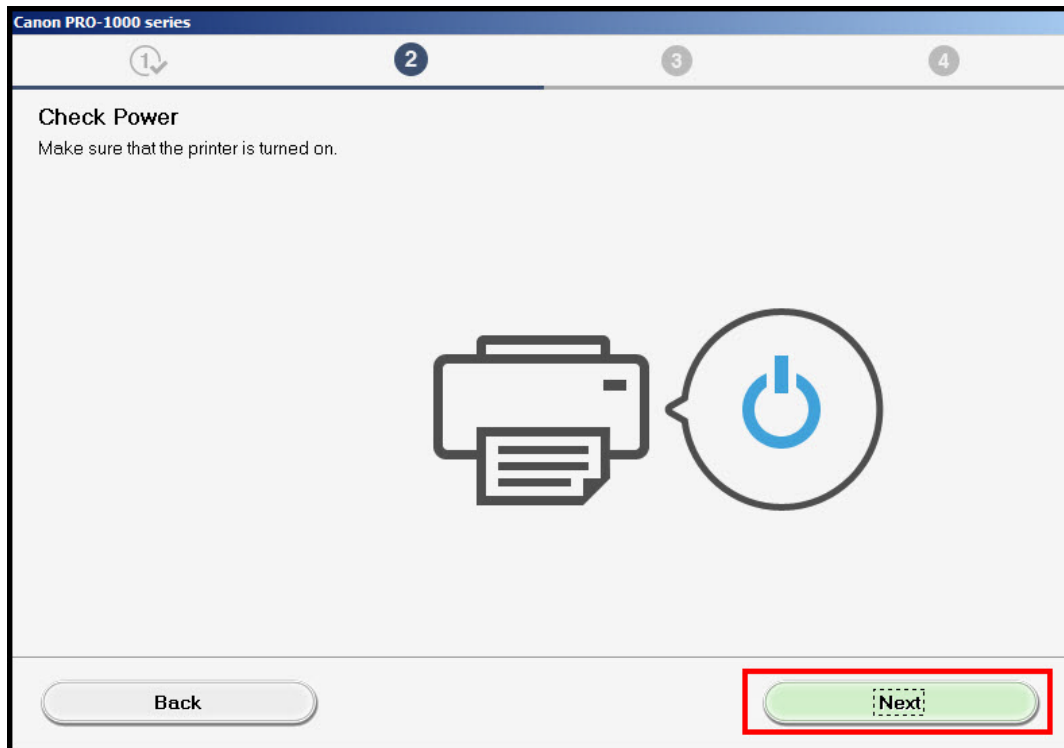

# Connecting to the Wireless LAN

On the **Select Printer** screen verify your printer is selected by checking the listing in the **Serial Number(Last 5 Digits)** column. This will show the last 5 digits of the printer's serial number. The serial number is found on a sticker on the back of the printer near the bottom right. Click **Next**.

Canon PRO-1000 series

1 2 3 4

### Select Printer

☒ Select from the list

The serial number can be found on the Letter of Guarantee and on the printer.

| IPv4 Device                               |            | IPv6 Device  |
|---|------------|--------------|
| Serial Number (Last 5 Digits)             | IP Address | MAC Address  |
| <input checked="" type="checkbox"/> 12345 | -          | 001122334455 |
|   |            |              |
|   |            |              |
|   |            |              |

Serial Number Location      Update

☐ Specify the IP address and run the search


☐ Set up the network connection according to the guide

Select this option if the printer is not displayed on the list or if it cannot be found by specifying the IP address.

Back to Top      Next


# Connecting to the Wireless LAN

Click **Next** on the **Connection Completed** screen.

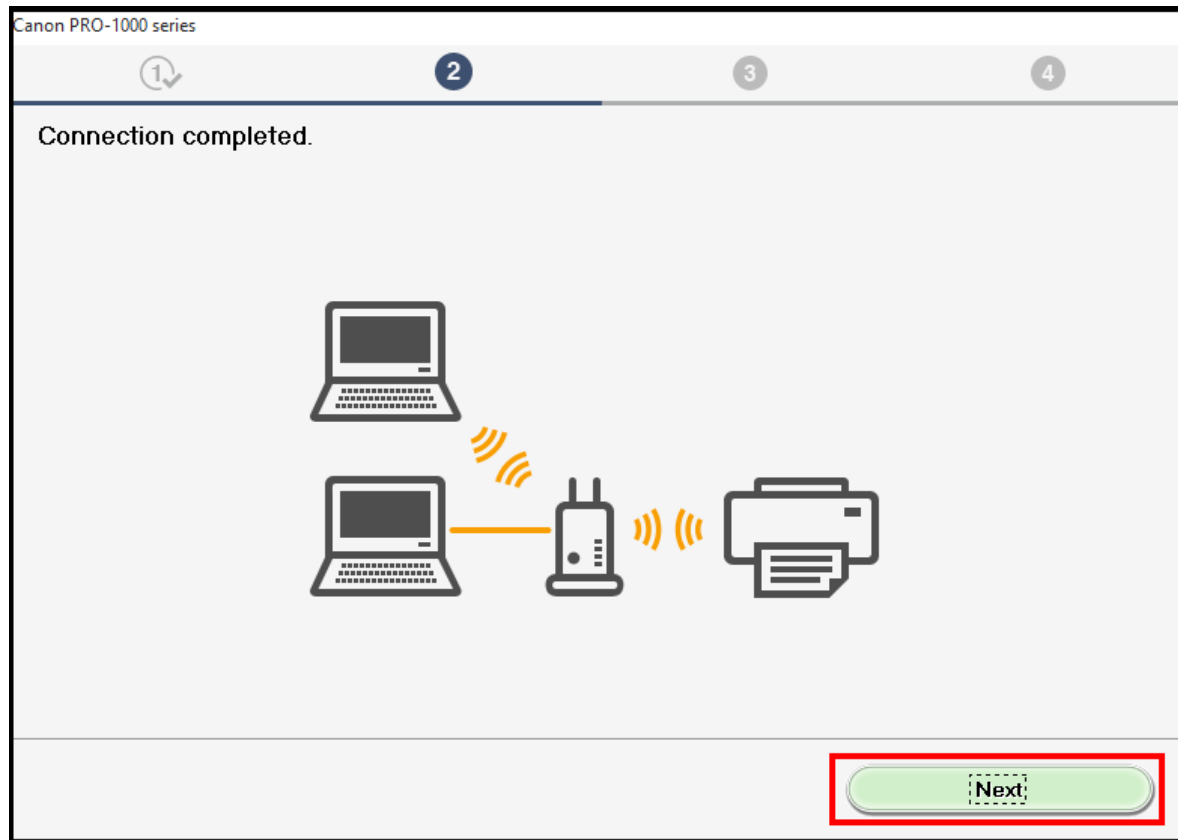

# Installing the Drivers & Software

Continue to follow on-screen instructions. Click **Next** on the **Setup Complete** screen.

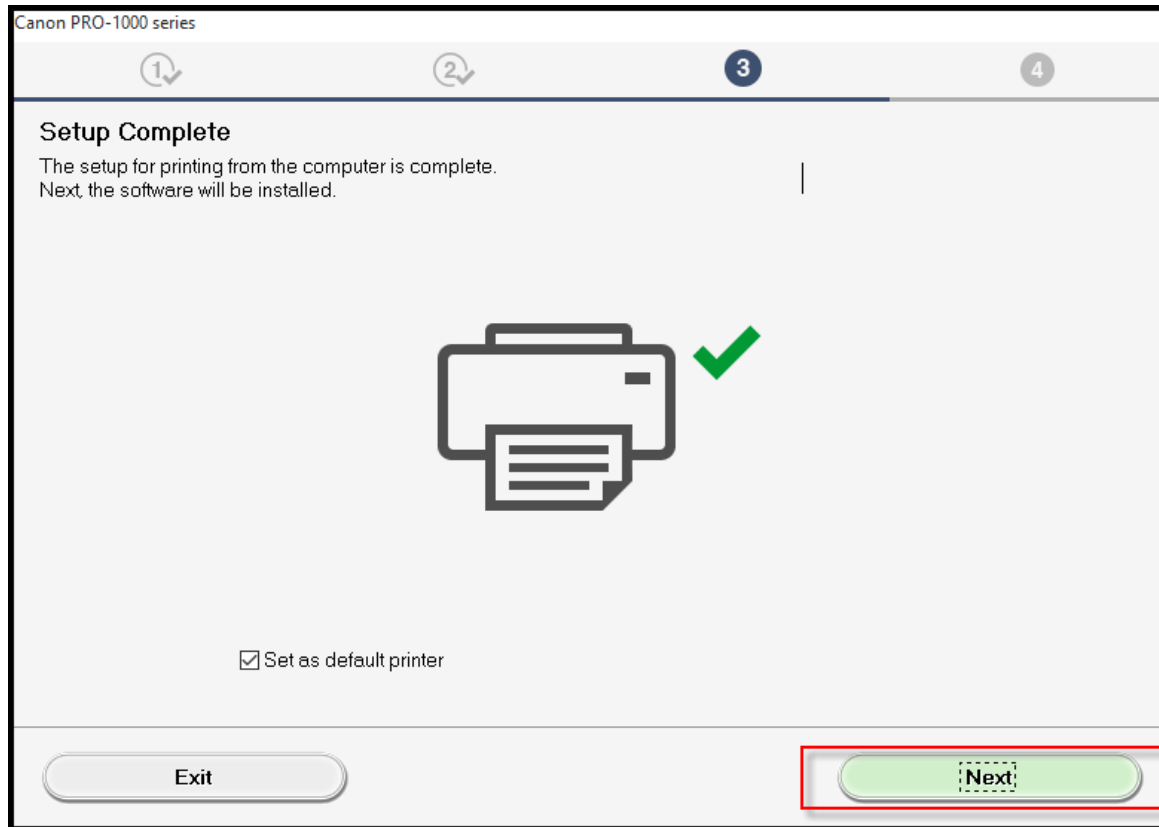

# Installing the Drivers & Software

Continue to follow the on-screen instructions. On the **Software Installation List**, select any of the optional software to install and click **Next**.

Canon PRO-1000 series

1 2 3 4

### Software Installation List

The selected software will be installed. Make sure that the software you want to install is selected, and then click [Next].

|                                     |                       |        |
|-------------------------------------|-----------------------|--------|
| <input checked="" type="checkbox"/> | User's Manual         | 10 MB  |
| <input checked="" type="checkbox"/> | My Printer            | 14 MB  |
| <input checked="" type="checkbox"/> | Quick Utility Toolbox | 25 MB  |
| <input checked="" type="checkbox"/> | Print Studio Pro      | 40 MB  |
| <input type="checkbox"/>            | XPS Driver            | 150 MB |

Drive C: 114577 MB free space  
Total used space: 89 MB

Estimated installation time: 5 to 10 minutes  
Installation may take some time depending on your network environment.

Defaults  
Clear All

Back to Top

**Next**



# Installing the Drivers & Software

At this point the connection has been established and Drivers and Software has been installed. Please follow any remaining instructions to finish and exit the setup. Click **Exit** when the **Installation completed successfully** screen appears.

