



Getting Your Multifunction Back On Your Network After A Router Or Network Change

PIXMA MG3220

Mac OS

Connecting to the Network

If any of the following situations exist

- You have replaced your Router or Access Point
- You want to use a different wireless network
- Router settings have been changed.

Please complete the following steps to apply the new configuration settings to your multifunction.

Connecting to the Network

To re-establish communication on the network after changing the router / Access Point or when connecting to a different network, the settings on the Multifunction need to be changed. If you saved a copy of the setup file when you originally installed your printer you can use it to run the setup. This file, “**Mac-MG3200-1_0-ucd-1.dmg**” is located in the **Downloads** folder. Double-click the file, then the **Setup** icon to start the installation.

Alternatively, you can download and run the **Mini Master Setup** file from our website. Follow the steps below.

1. [Click here to access the MG3220 Drivers & Software page.](#)
2. Select the operating system and version of your computer (see example below).
3. Expand the ‘**Drivers**’ section, if necessary, by clicking the red triangle.
4. Click on the ‘**MG3200 series Mini Master Setup**’ entry
5. After reading the details and disclaimer, click ‘**I Agree – Begin Download**’ and save the file to your computer.
6. Once the download is complete, double-click the file from its download location, then double-click the **Setup** icon.

Drivers & Software

Select an Operating System and OS Version from the drop down menu below then click on view the latest supported files for your product. Click on the file description to navigate to click on "I Agree - Begin Download" to start downloading.

Mac OS OS X v10.8 Mountain Lion [How](#)

Select Language: English Spanish All

Show All

▼ Drivers		Sort by	Most Recent Post I
File Description			Date
⊕ MG3200 series Mini Master Setup (OS X 10.5/10....			09/28/1
⊕ ICA Driver Ver. 2.1.1m (OS X 10.6/10.7/10.8)			09/14/1

Connecting to the Network

Connect the PIXMA MG3220 to Your Wireless Network

If the following screen appears after starting the setup file or the Mini Master setup, select **“Start Setup Again”**

Change Connection Method

Change the connection method between the printer and computer from USB to LAN or from LAN to USB.

Add Software

Select software to add or reinstall it.


Start Setup Again

Start again from the initial installation to connection.

Follow any instructions until the **Connection Method Selection** screen appears.


Connecting to the Network

On the **Connection Method Selection** screen (1-1), Select **Wireless Connection**.

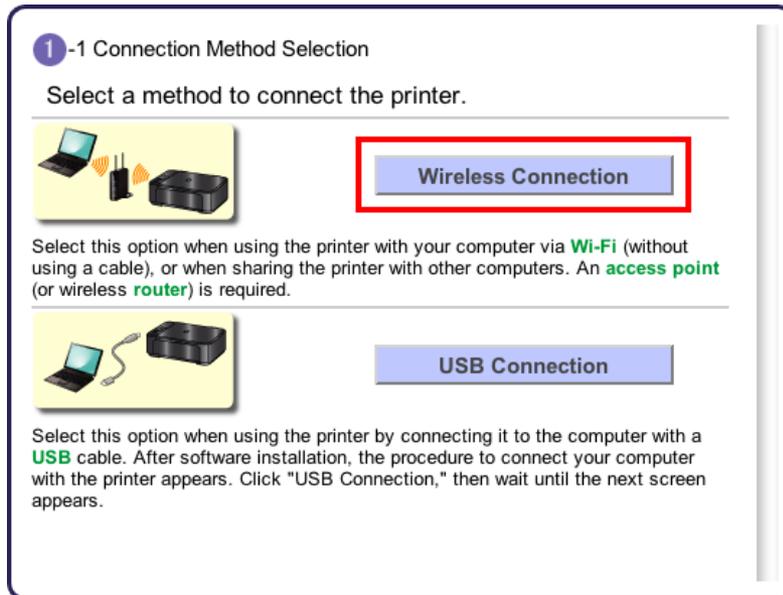

Continue to carefully follow any on-screen instructions until the **Setup Procedure Selection** screen (3-1) screen appears. This screen is shown on the next page.

On the **Setup Procedure Selection** screen (3-1) screen, select **Wireless Setup Using the USB Cable**. This is the recommended setup method. You will need to use the supplied USB cable

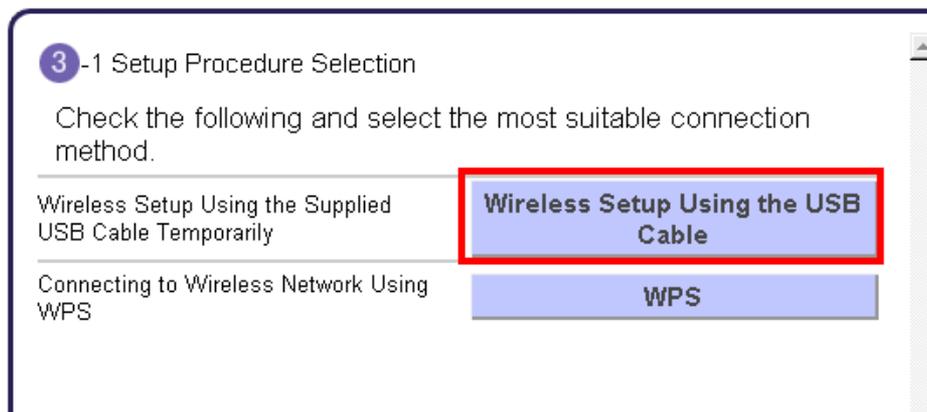

Continue to follow any on-screen instructions until the **Software Installation List** appears. This screen is shown on the next page



Connecting to the Network

[<< Previous](#)

[Next >>](#)

The drivers and software will install. Continue to follow the on-screen instructions.

Click **Next** on the **Set Up New Printer** window, then connect the supplied USB cable between the printer and computer and click **Next** on the **Connect Cable** screen..

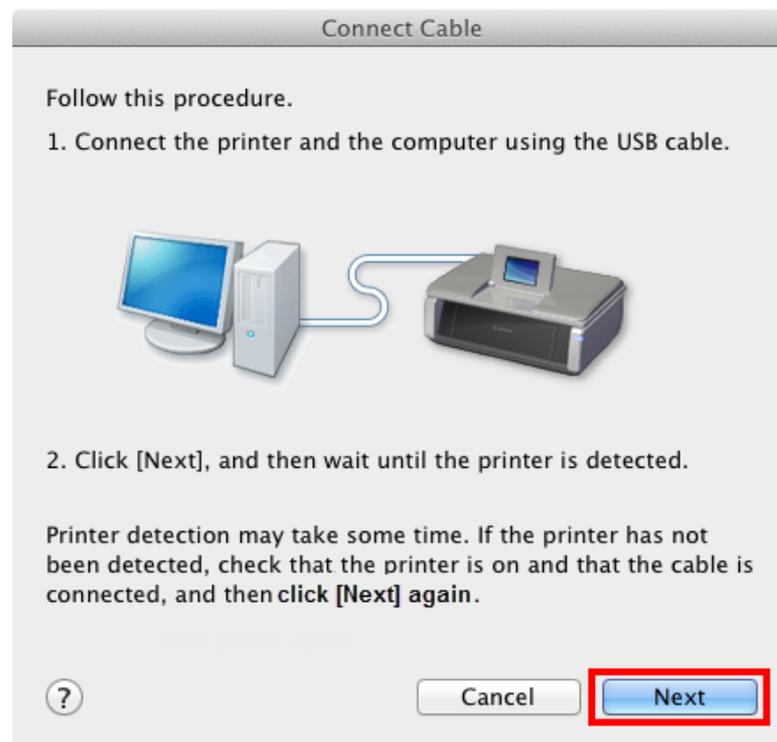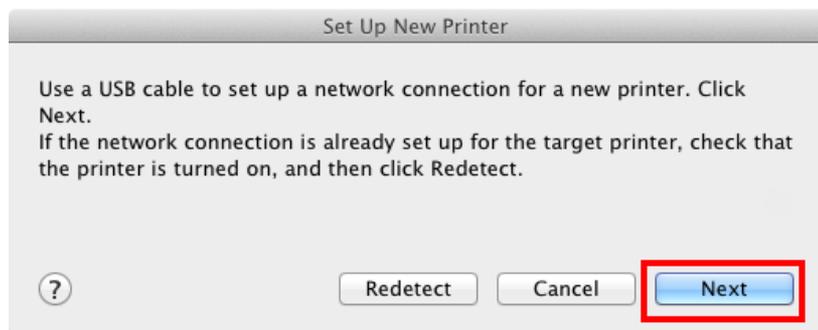

Connecting to the Network

[<< Previous](#)

[Next >>](#)

If the **Access Points** screen appears:

Select the Access Point to connect to, enter the Network Key (password) and click **Connect**.

*For details on how to check the Access Point name/network name (SSID) and network key, refer to the manual supplied with your access point or contact its manufacturer.



The screenshot shows the 'Access Points' screen with the following content:

The following access points were detected.
Select the access point to connect to, and click [Connect].

Detected Access Points:

Level	Encryption	Access Point Name (SSID)	Channel
1	WPA	abcdefg	6
1	WPA2	abcdefg	6
1	WPA	MyNetwork	11

Network Information Update

To connect to this access point, enter the network password, and then click [Connect].


Network Password:

For the network password, click the [?] at lower left.
If you need to configure the printer network settings manually to connect to the access point, click [Manual Setup].

? Manual Setup Cancel Back **Connect**

If the **Confirm Connection Access Point** screen appears:

Click **Yes** to confirm the Access Point .

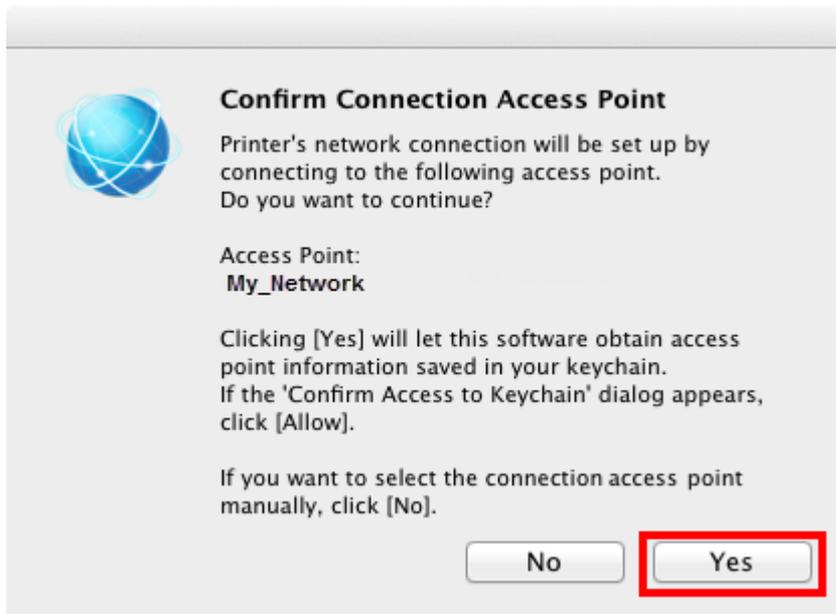


Disconnect the USB cable when the **Disconnect Cable** screen appears. Click **Next**



Setup with the network is now complete. Continue to follow any on-screen instructions until the **Add Printer** screen appears. This is shown on the next page.

Click **Add Printer** on the **Add Printer** screen

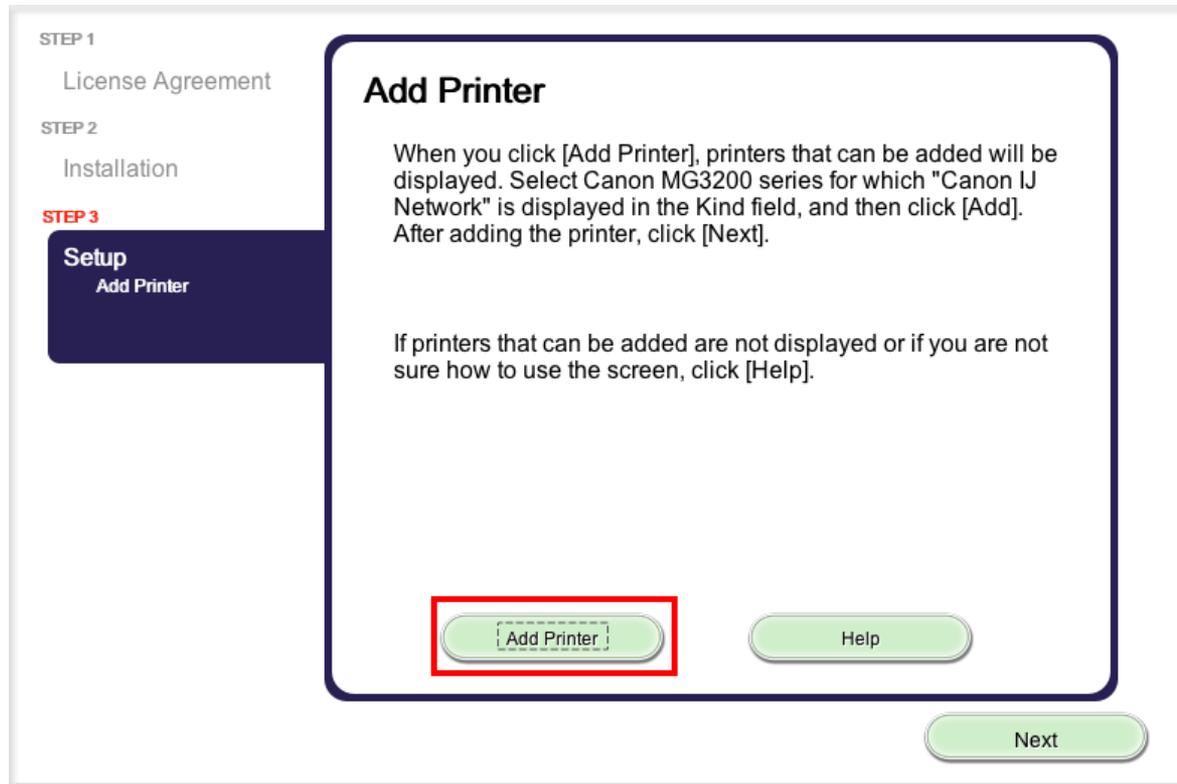


Adding the Printer


[<< Previous](#)

[Next >>](#)

Select the **MG3200 series** with **Canon IJ Network** listed for 'Kind', then click **Add**.

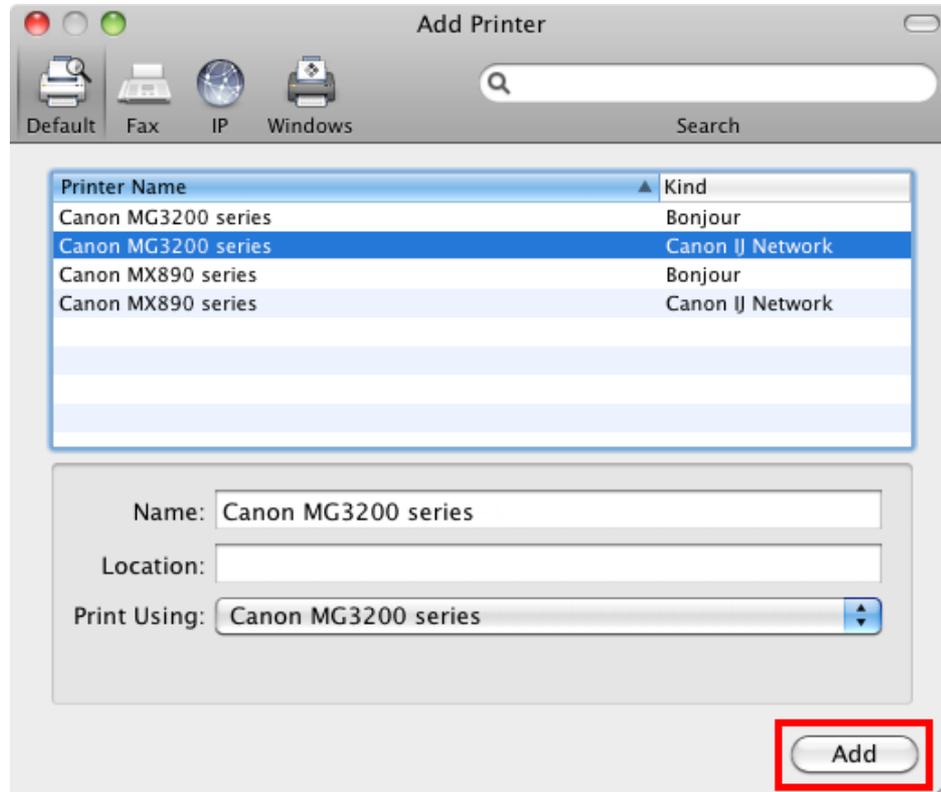

Click **Next** on the **Add Printer** screen.

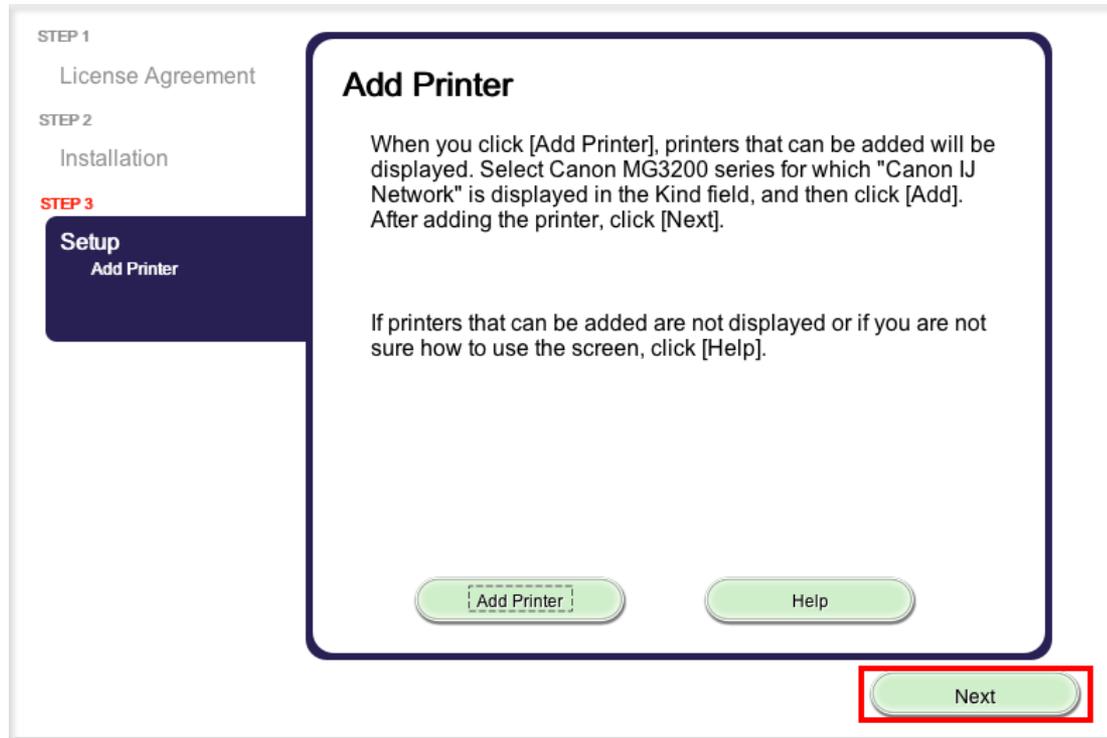

Continue to follow on-screen instructions to finish setup and exit.