



**Getting Your Multifunction
Back On Your Network
After A Router Or Network Change**
PIXMA MG3520

Mac OS

Getting Your Multifunction Back On Your Network After A Router Or Network Change

PIXMA MG3520

Mac OS

Preparing to Connect My Multifunction to My Network	3
Network Requirements	3
Notes on Wireless Connection	4
Installing the Drivers & Software	5

Important

If any of the following situations exist


- You have replaced your Router or Access Point
- You want to use a different wireless network
- Router settings have been changed.

Please complete the following steps to apply the new configuration settings to your multifunction.

Preparing to Connect the Multifunction To the Network

Network Requirements



Before connecting the machine to the network, make sure that configuration of the computer and access point or router is complete, and that the computer is connected to the network.

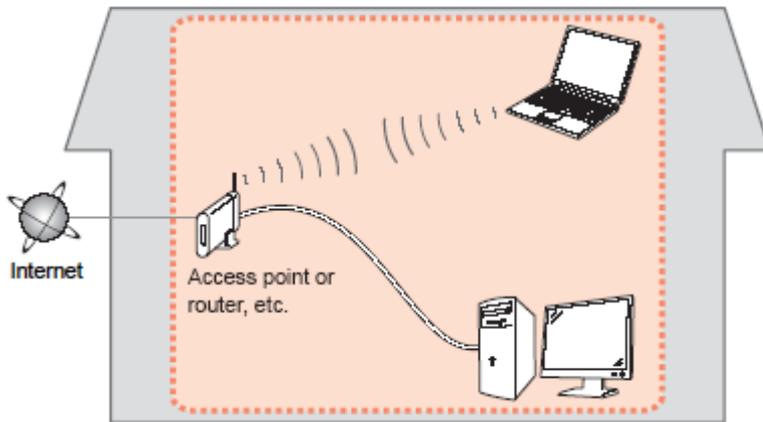

Wireless Connection

Before connecting the machine to the network, the computer needs to be connected to the network. Make sure that configuration of the computer and access point or router is complete.

Preparing to Connect the Multifunction To the Network

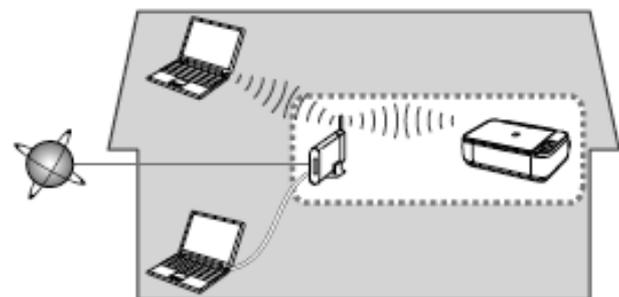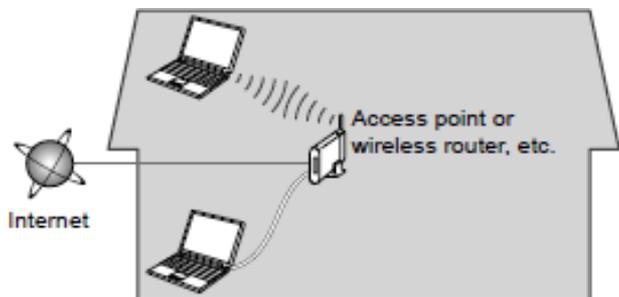

An "Ad-hoc connection," which establishes a direct connection to the computer over a wireless connection without using an access point, is not supported.

Notes on Network Connection

- The configuration, router functions, setup procedures and security settings of the network device vary depending on your system environment. For details, refer to your device's instruction manual or contact its manufacturer.
- In an office setup, consult your network administrator
- If you connect to a network that is not protected with security measures, there is a risk of disclosing data such as your personal information to a third party.
- Place the machine and computer on the same network segment.

Installing the Drivers & Software

Software Installation

To use the machine by connecting it to a computer, software including the drivers needs to be copied (installed) to the computer's hard disk. Installation time varies depending on the computer environment or the number of application software to be installed.

IMPORTANT

- Log on as the administrator (or a member of the Administrators group).
- Quit all running applications before installation.
- Do not switch users during the installation process.
- Internet connection may be required during the installation. Connection fees may apply. Consult the internet service provider.
- If the firewall function of your security software is turned on, a warning message may appear that Canon software is attempting to access the network. If such a warning message appears, set the security software to always allow access.

Installing the Drivers & Software


When you reinstall your printer on your network because of a router or network change, you follow the same procedure as for a first time install. A step-by-step walk through of the wireless setup is built into the installation routine of the software for your PIXMA.

To begin the reinstall of your PIXMA MG3520 to your wireless network, you must first download the software to your computer.

[Click here to download.](#)


After the file, mac-mg3500-1_0-mcd.dmg , has downloaded successfully, double-click it to start the install procedure.

If the following screen appears, click **Start Setup Again**

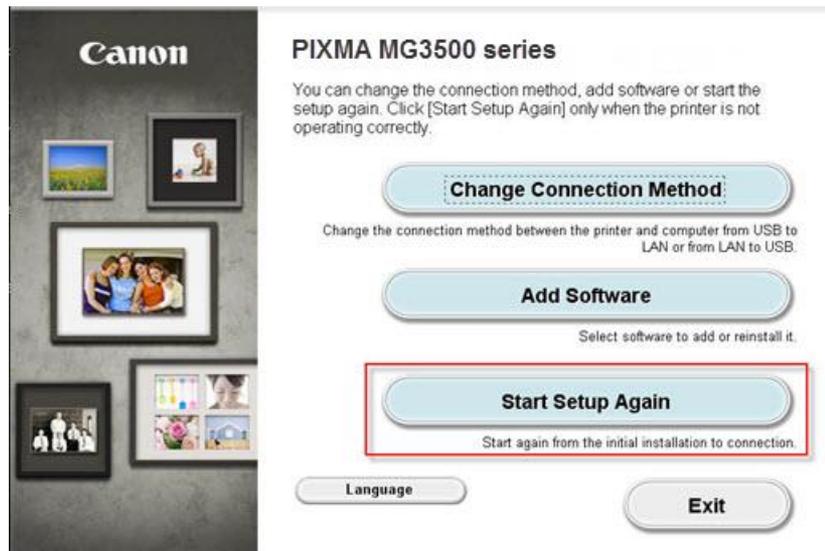


Installing the Drivers & Software

Click **Next** on the first screen. If prompted, enter the Administrative Password to continue.

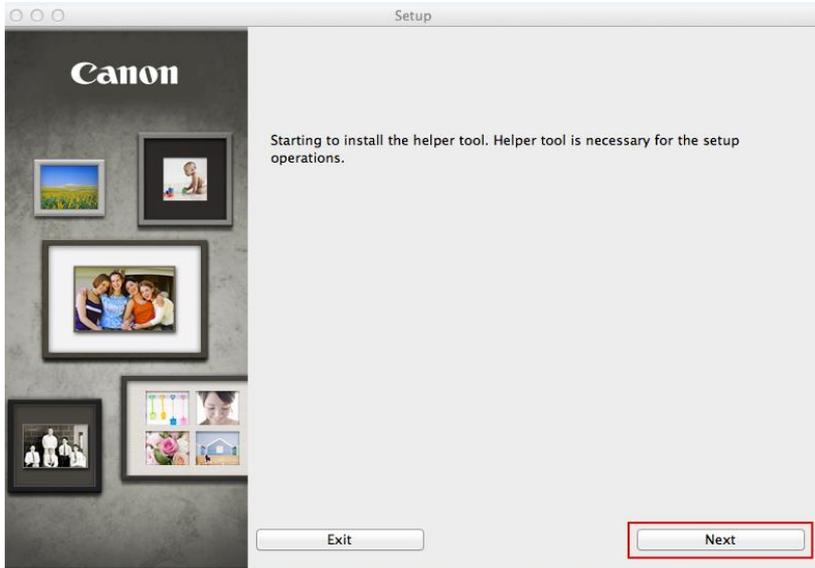



Installing the Drivers & Software

Click **Next** on the following screen.

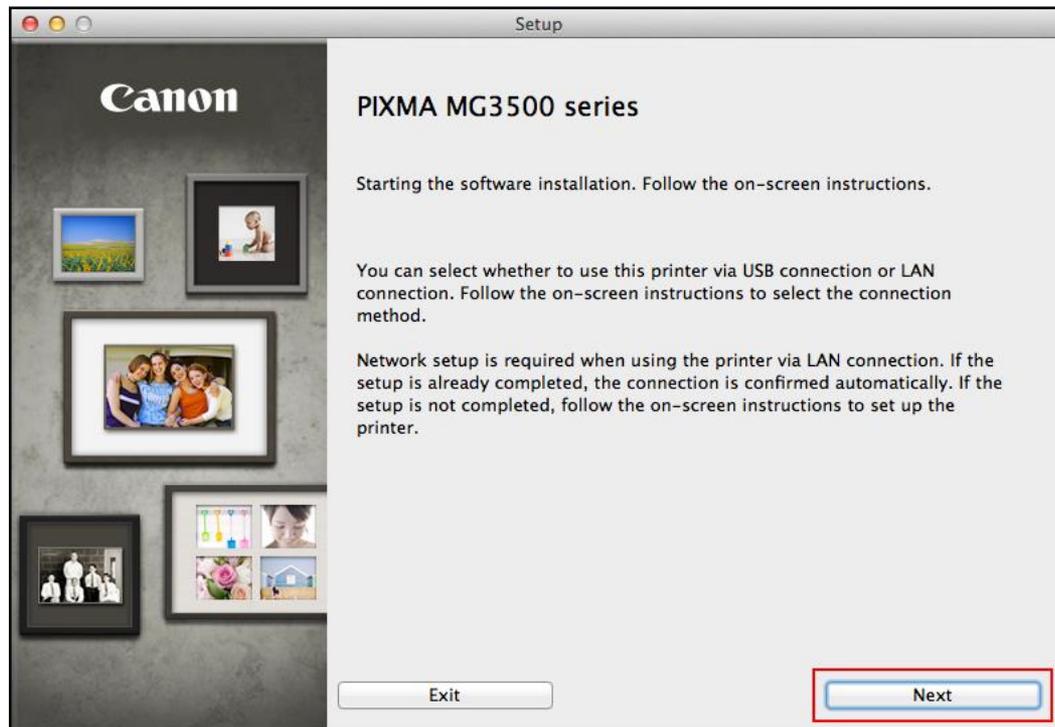

Installing the Drivers & Software


On the **Connection Method Selection** screen (1-1) select **Wireless Connection**, then select **Connect to the network** on the **Printer Setup** screen (2-1).

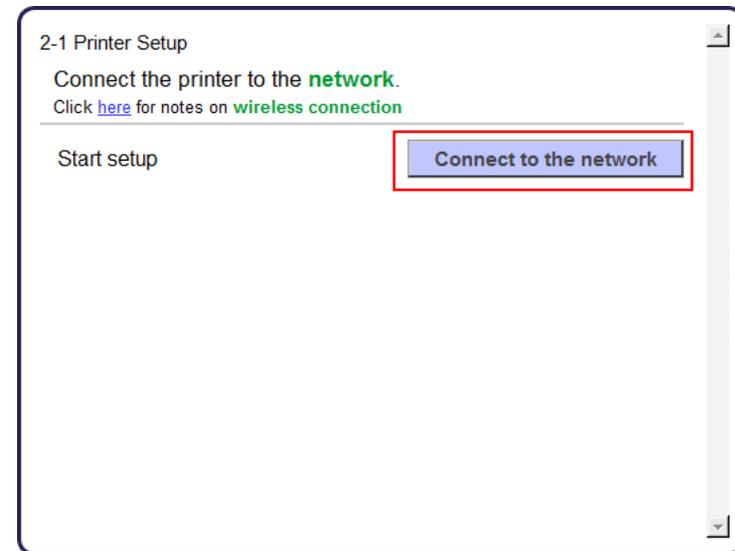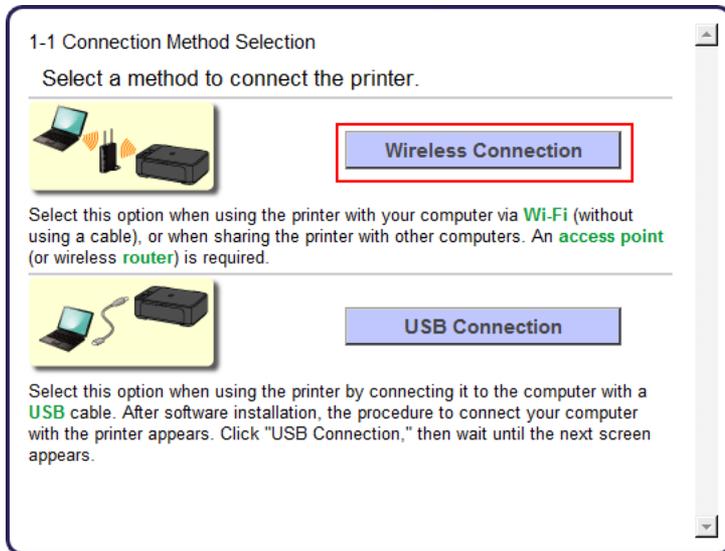

Installing the Drivers & Software


Continue to follow on-screen instructions.

Select **Cableless setup** on the **Setup Procedure Selection** screen (3-1).

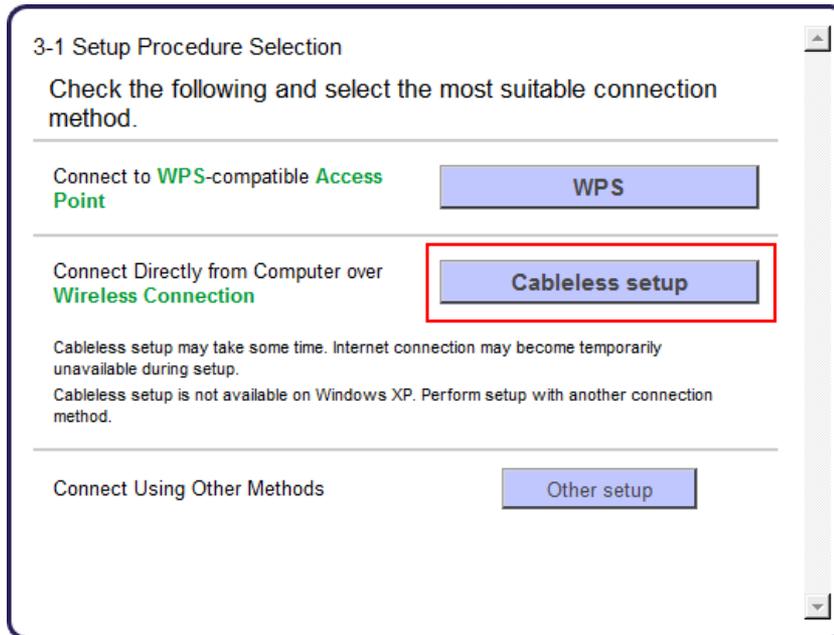


Installing the Drivers & Software

Carefully follow the instructions on the **Connection via Cableless setup** screen. (4-1). Click **Next**

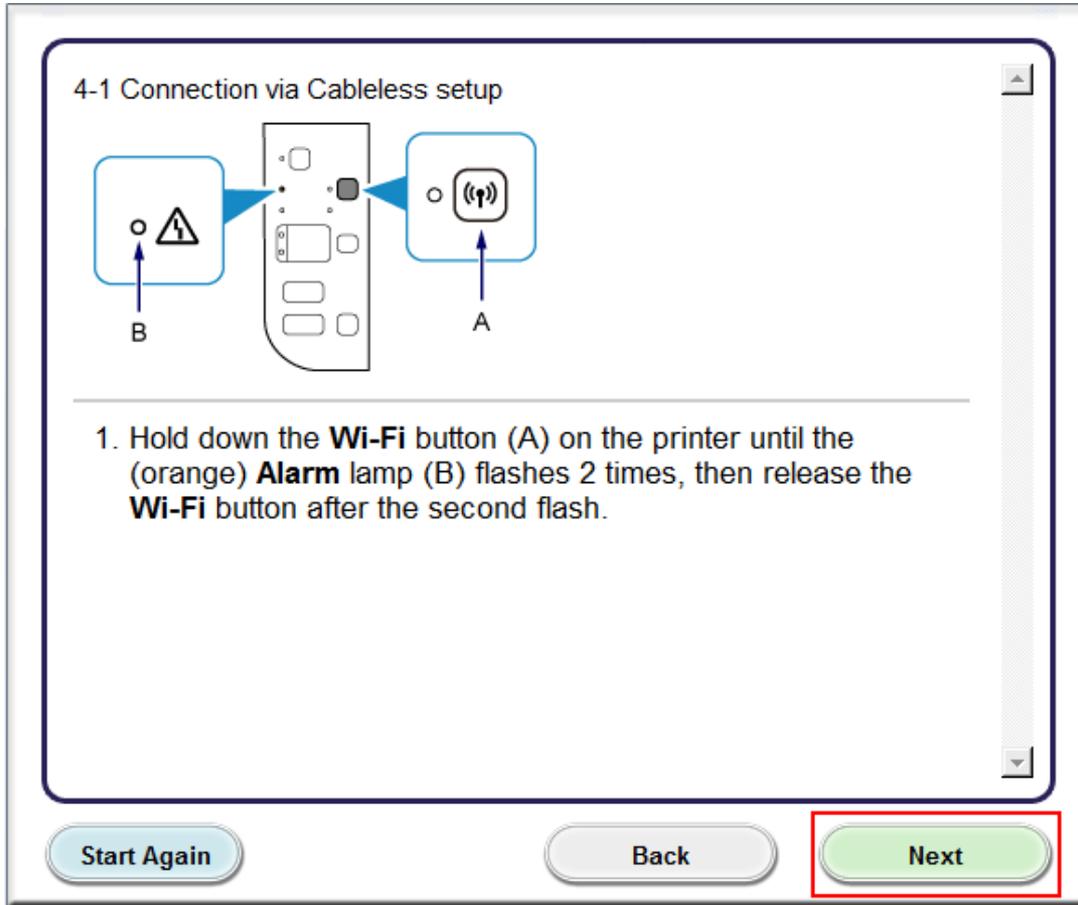

4-1 Connection via Cableless setup

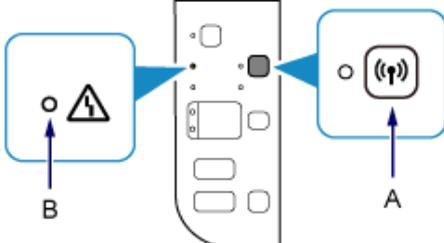


1. Hold down the **Wi-Fi** button (A) on the printer until the (orange) **Alarm** lamp (B) flashes 2 times, then release the **Wi-Fi** button after the second flash.


Start Again Back **Next**

Installing the Drivers & Software

Carefully follow the instructions on the **Connection via Cableless setup** screen. (4-2). Click **Next**

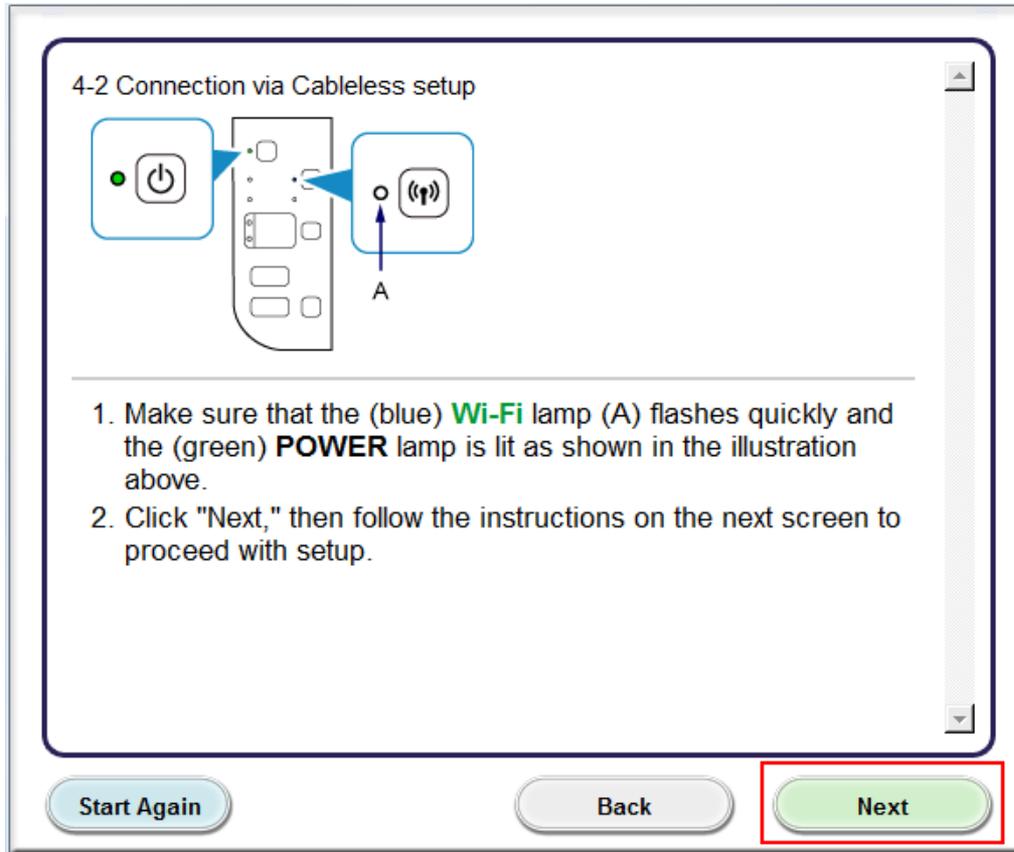

4-2 Connection via Cableless setup

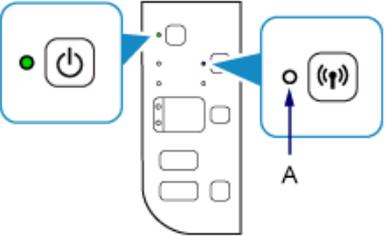


1. Make sure that the (blue) **Wi-Fi** lamp (A) flashes quickly and the (green) **POWER** lamp is lit as shown in the illustration above.
2. Click "Next," then follow the instructions on the next screen to proceed with setup.

Start Again Back **Next**

Installing the Drivers & Software

Continue following on-screen instructions. On the **Software Installation List**, select *software to install and click **Next**.


***MP Drivers** and **Canon IJ Network Tool** are required and cannot be deselected. We recommend installing **My Image Garden** and **Quick Menu** to take full advantage of the printer's features. It is not necessary to reinstall these additional programs if they were installed previously

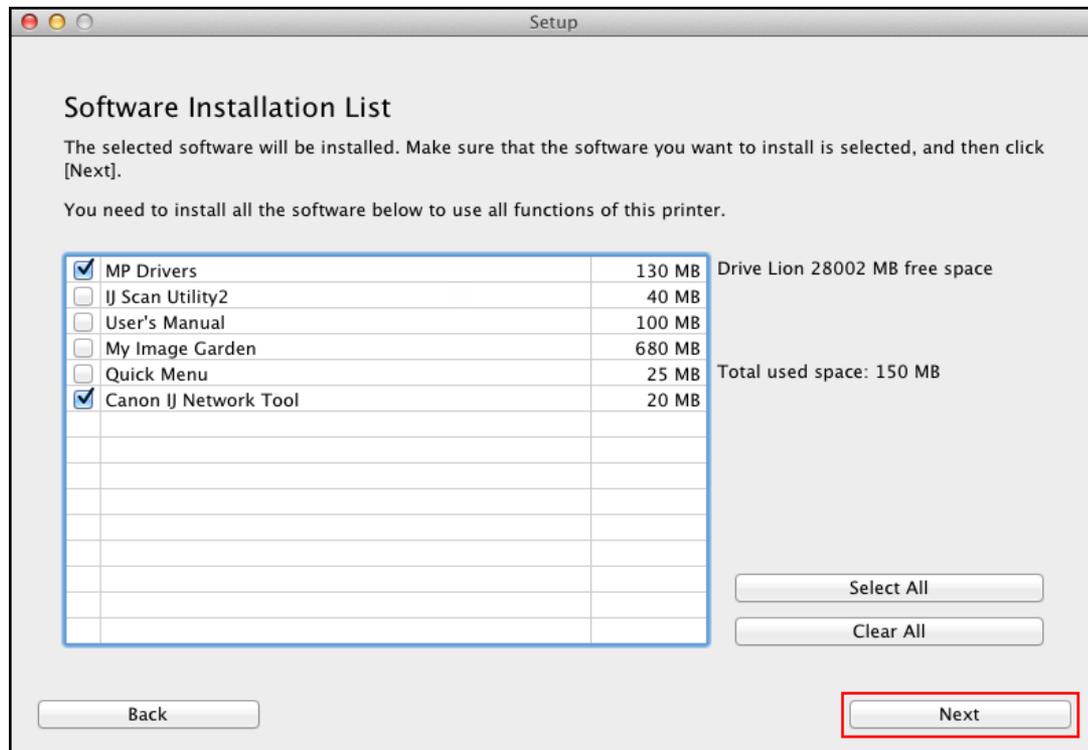

Adding the Printer


Continue following the on-screen instructions.

When the **Add Printer** screen appears, click **Add Printer**.

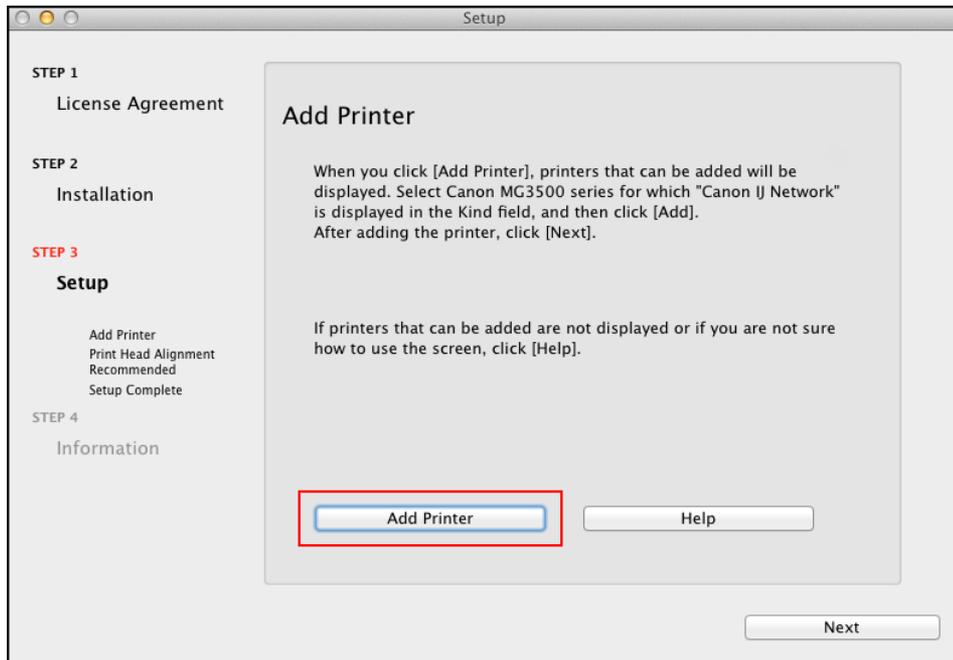


Adding the Printer

Select the **Canon MG3500 series** with **Canon IJ Network** listed in the **Kind** column, then click **Add**.

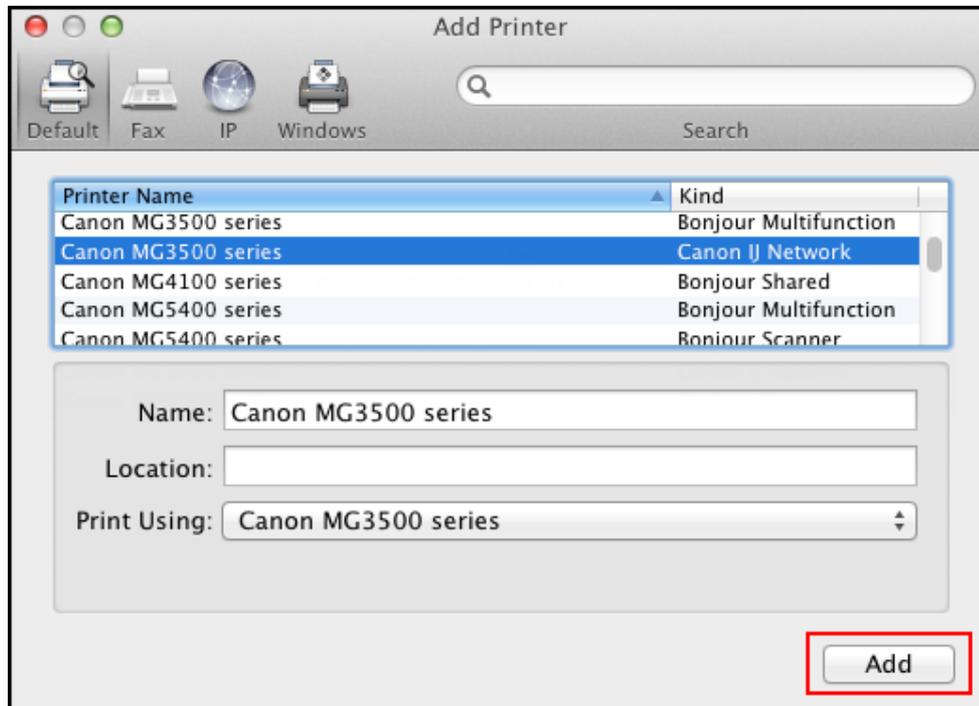

Adding the Printer


Click **Next** on the **Add Printer** screen

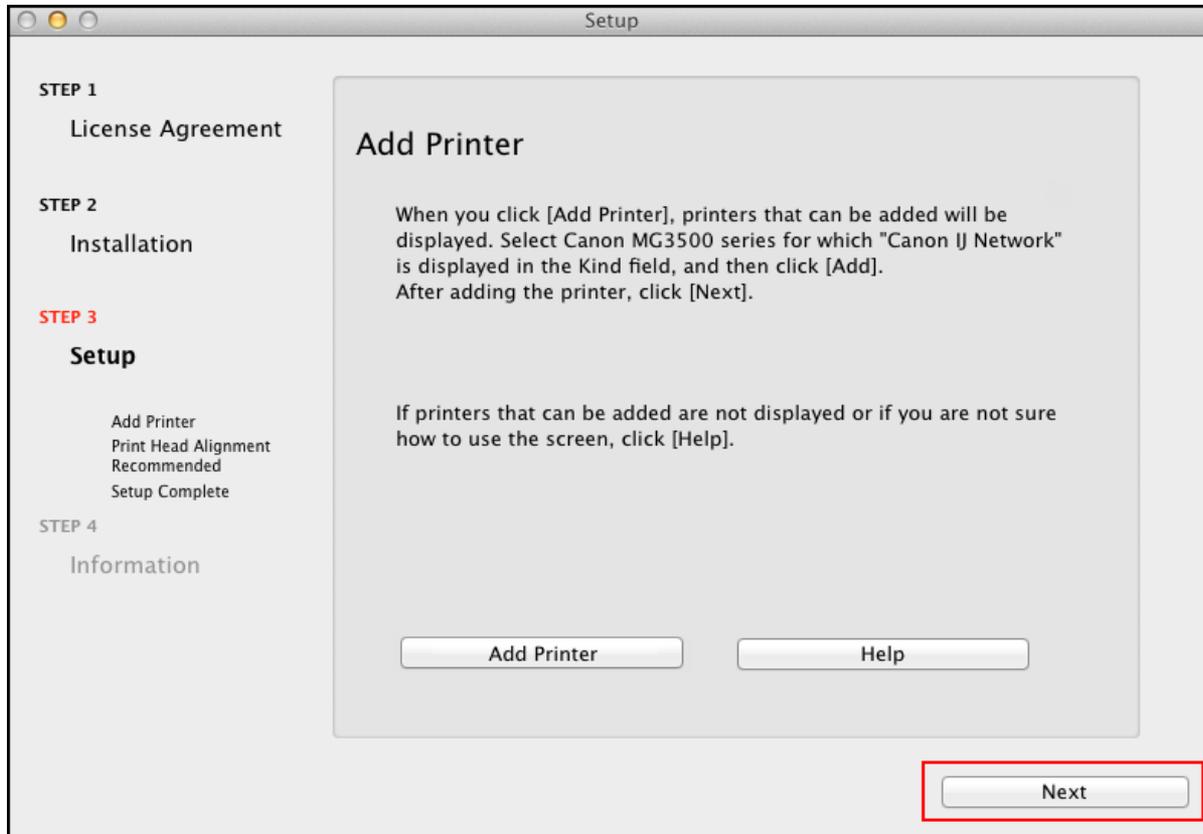

Completing the Setup

Continue following on-screen instructions.

When the **Setup Complete** screen appears, click **Next**.

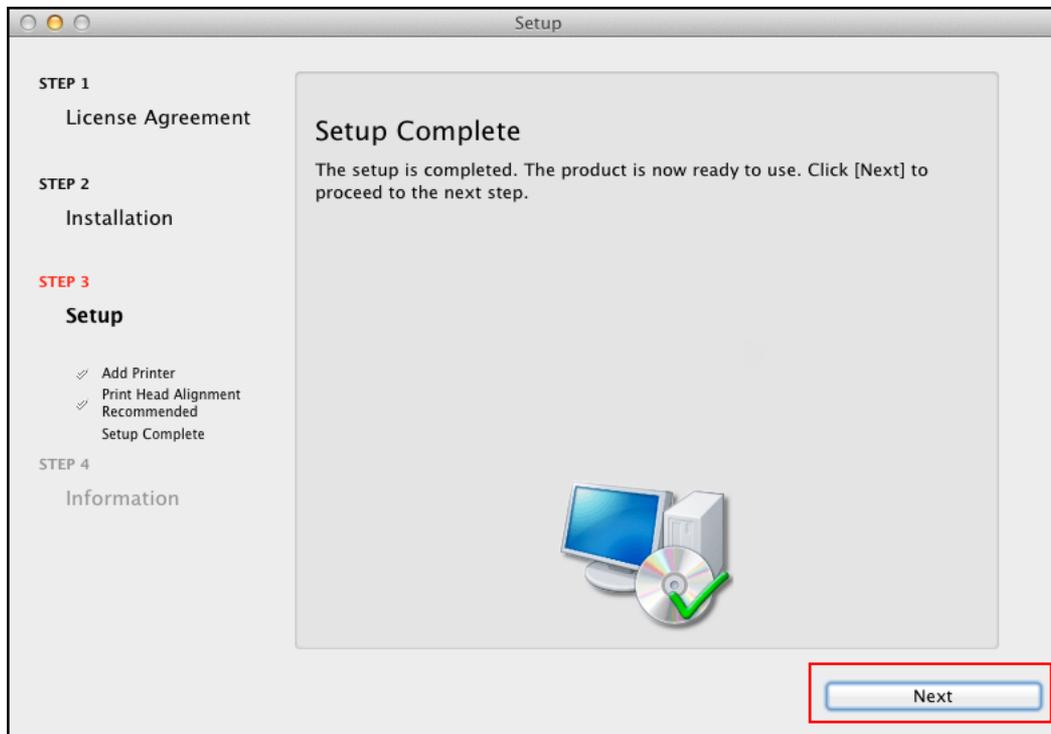

At this point, setup of the printer and network is complete. Continue to follow any remaining on-screen instructions to finish and exit the setup program.