




Installing Your Multifunction to Additional Computers on Your Network

PIXMA MX860

Mac OS

Navigation Tips for Macintosh Users

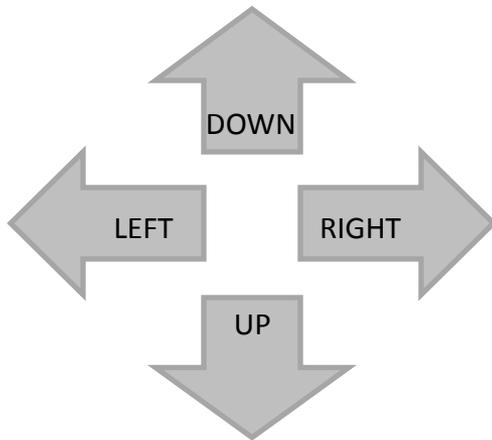

To navigate this guide, please use the arrows on the MAC keyboard or use the PAGE UP and Page DOWN keys.

Page UP

Page DOWN

Installing Your Multifunction to Additional Computers on Your Network

PIXMA MX860

Mac OS

Downloading & Installing the Drivers	4
Downloading the Driver	4
Installing the Driver	7
Adding the Machine	13

Downloading the Driver

To use the machine by connecting it to a computer, software including the drivers needs to be copied (installed) to the computer's hard disk. The installation process takes about 20 minutes. (The installation time varies depending on the computer environment or the number of applications to be installed.)

Step One

[Go to the Drivers & Software for your model](#)

Step Two

Select your operating system in the **Select OS** dropdown menu.

Drivers & Software

Choose an operating system from the drop down menu then select the appropriate driver or software list below

Choose Operating System:

Mac OS X v10.6
Select OS
Mac OS X v10.6
Mac OS X v10.5
Mac OS X v10.4
Mac OS X v10.3
Mac OS X v10.2
..

Select Language

Spanish All

Hide All

▼ Drivers

Step Three

In the Drivers section, click the Download icon for the **MP Driver for Network**

▼ Drivers			
File Description	Post Date	Size	Download
⊕ MX860 series Scanner Driver Ver. 14.11.3a (Ma... File Name: msd_-mac-mx860-14_11_3a-ea8_2.dmg	10/15/10	22.11MB	
⊕ MX860 series MP Driver Ver.1.0 for Network (M... File Name: mx860sosxns10ea7-3.dmg	10/30/09	36.81MB	

Downloading and Installing the Drivers

Step Four

On the next screen, read the information and instructions and click **I Agree - Begin Download**
Once the file has been downloaded, double-click it to begin the installation process

IMPORTANT:

- Quit all running applications before installation.
- Log on as the administrator (or a member of the Administrators group).
- Do not switch users during the installation process.
- Internet connection may be required during the installation. Connection fees apply.
- It may be necessary to restart your computer during the installation process. Follow the on-screen instructions. The installation resumes once your computer has restarted.

If the firewall function of your security software is turned on, a warning message may appear that Canon software is attempting to access the network. If such a warning message appears, set the security software to always allow access.

Once the file has been downloaded, double-click it to begin the installation process

Downloading and Installing the Drivers

Installing the Driver

Step One

- A. Connect one end of the USB cable to the computer and the other to the machine.
- B. Make sure the machine is turned on.

Step Two

Double-click the **Setup** icon.



Downloading and Installing the Drivers


Step Three

If the following message appears, click **Open**.



Step Four

Enter your administrator name and password. Click **OK**.

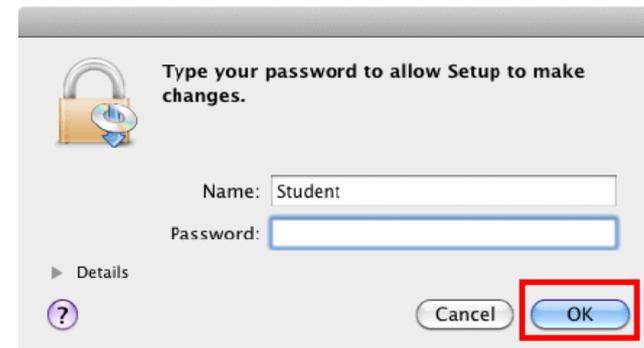

If you do not know your administrator name or password, click Help , then follow the on-screen instructions.

Downloading and Installing the Drivers

Step Five

Select the place of residence. Click **Next**.



Step Six


Click **Easy Install**.



Downloading and Installing the Drivers


Step Seven

Click **Install**.

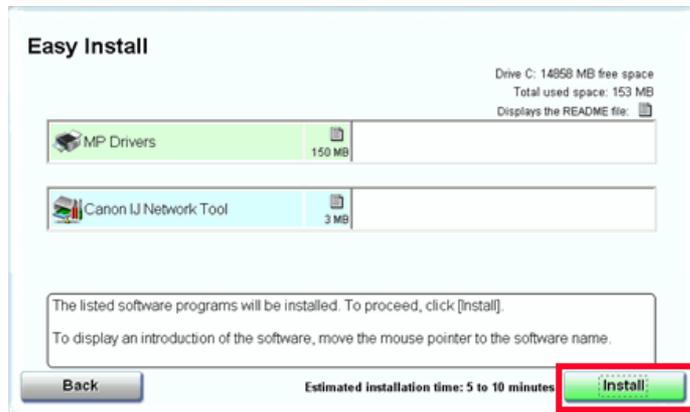

Step Eight

Read the License Agreement screen carefully and click **Yes**.

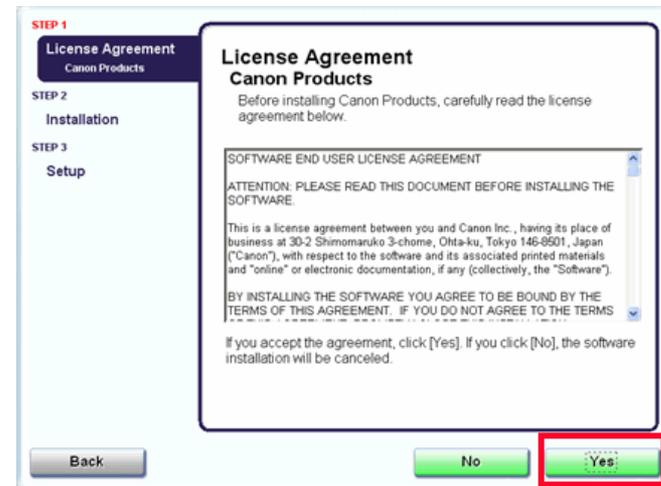

Installation starts.

Downloading and Installing the Drivers

Step Nine

Click **Restart**



Step Ten

After the computer restarts, select **LAN connection** and click **OK**.




If the **Setup Preparations** dialog box appears, confirm that preparation is complete and click **OK**.


Downloading and Installing the Drivers

Step Eleven

Click the **Register Printer** button.

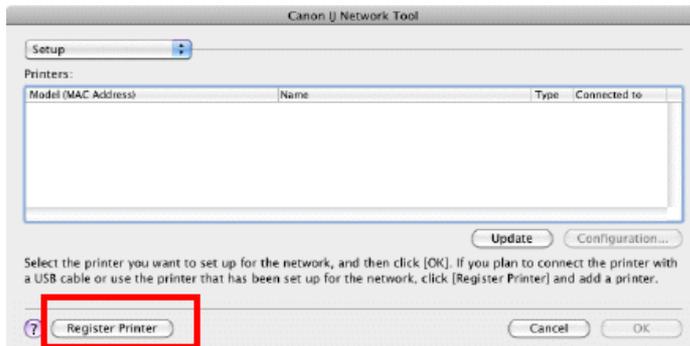

When the **Cancel Setup** screen appears, click **Cancel**.

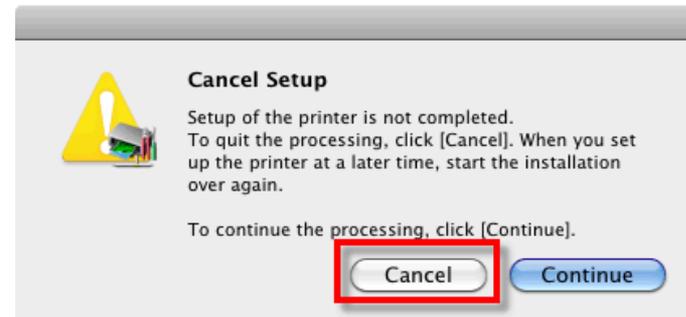


Downloading and Installing the Drivers

Adding the Machine

This section describes how to register the machine on a Macintosh computer.

Step One

Wait for a while, then select **Canon xxxx series** ('xxxx' refers to model) and click **Add**.

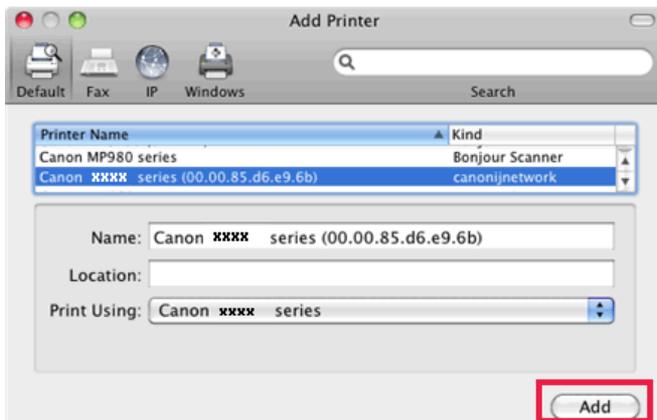


Note :

- The alphanumeric string after Canon xxxx series is the machine's MAC address.
- If the machine has not been detected, make sure of the following.
 - The machine is turned on.
 - The firewall function of any security software is turned off.
 - The computer is connected to the access point.
 - The machine is not set to use access control (MAC address filtering).

Step Two

On the **Canon IJ Network Scanner Selector** screen, select **Canon xxxx series Network** ('xxxx' refers to model) in **TWAIN Data Source Name** and the MAC address of the machine in **Network Device List**, then click **Apply** to use the machine as a scanner.

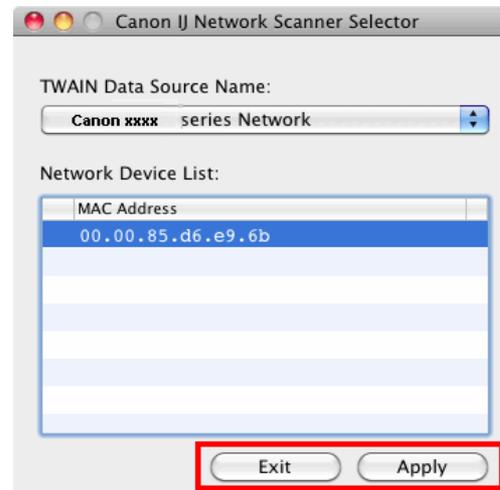

Confirm that a check mark is displayed, then click **Exit** to close the dialog box. **Installation is completed.**