




# **Installing Your Multifunction On Additional Computers**

**PIXMA MP990 / PIXMA MP640 / PIXMA MP560**

**Mac OS**

# Navigation Tips for Macintosh Users

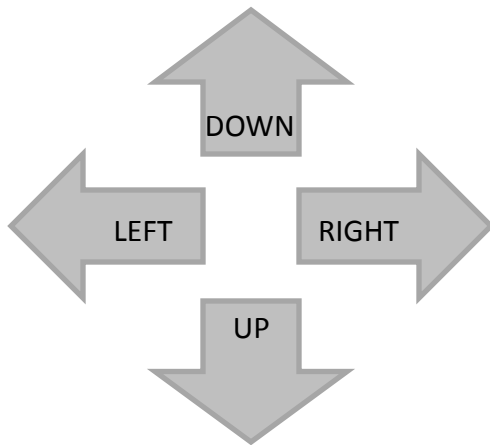

To navigate this guide, please use the arrows on the MAC keyboard or use the PAGE UP and Page DOWN keys.



# Installing Your Multifunction On Additional Computers

PIXMA MP990 / PIXMA MP640 / PIXMA MP560

Mac OS

<b>Downloading &amp; Installing the Drivers</b>	<b>4</b>
Downloading the Driver	4
Installing the Driver	7
Adding the Machine	13

# Downloading and Installing the Drivers

## Downloading the Driver

To use the machine by connecting it to a computer, software including the drivers needs to be copied (installed) to the computer's hard disk. The installation process takes about 20 minutes. (The installation time varies depending on the computer environment or the number of applications to be installed.)


### Step One

Go to the Canon USA Download Library  
[Click here to go to the Canon USA download library](#)

### Step Two

Select **Multifunction Printers** in the first menu dropdown, **Inkjet** in the second and your model in the third. Click **Go**.

**PRODUCT MENU**  
Please choose the model from the dropdown menus below:

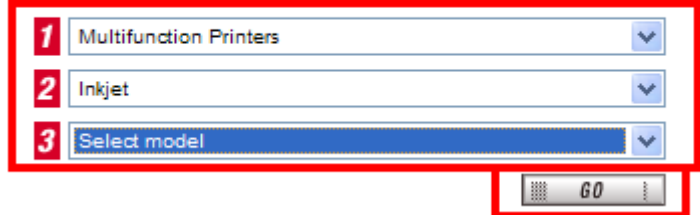

1 Multifunction Printers

2 Inkjet


3 Select model

GO

# Downloading and Installing the Drivers

## Step Three

In the **Drivers / Software Selection** section, select your operating system in the **Select OS** dropdown menu.

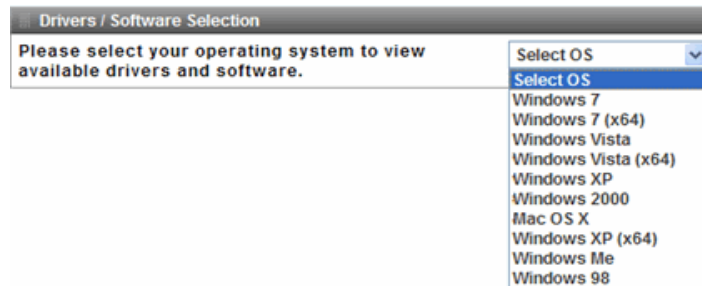

## Step Four

In the Drivers section, click the link\* (red printing) for the **MP Driver**

\*Name varies by model



# Downloading and Installing the Drivers

## *Step Five*

On the next screen, read the information and instructions and click **I Agree - Begin Download**. Once the file has been downloaded, double-click it to begin the installation process.

### **IMPORTANT:**

- Quit all running applications before installation.
- Log on as the administrator (or a member of the Administrators group).
- Do not switch users during the installation process.
- Internet connection may be required during the installation. Connection fees apply.
- It may be necessary to restart your computer during the installation process. Follow the on-screen instructions. The installation resumes once your computer has restarted.

If the firewall function of your security software is turned on, a warning message may appear that Canon software is attempting to access the network. If such a warning message appears, set the security software to always allow access.

# Downloading and Installing the Drivers

## Installing the Driver


### Step One

Double-click the **Setup** icon.



### Step Two


If the following message appears, click **Open**.

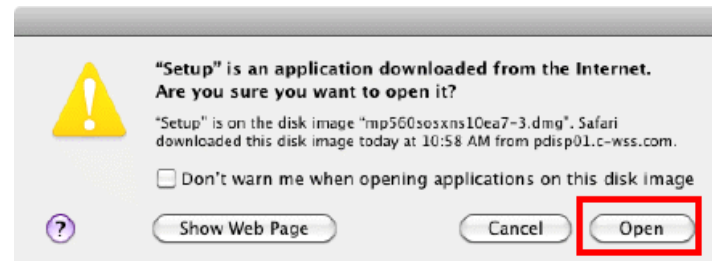

# Downloading and Installing the Drivers

## Step Three


Enter your administrator name and password. Click **OK**.

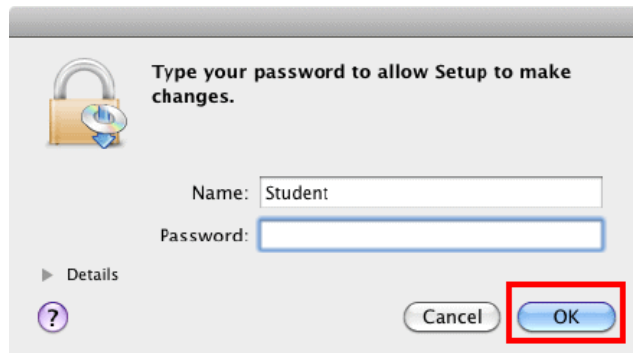

If you do not know your administrator name or password, click Help, then follow the on-screen instructions.

## Step Four

Select the place of residence. Click **Next**.

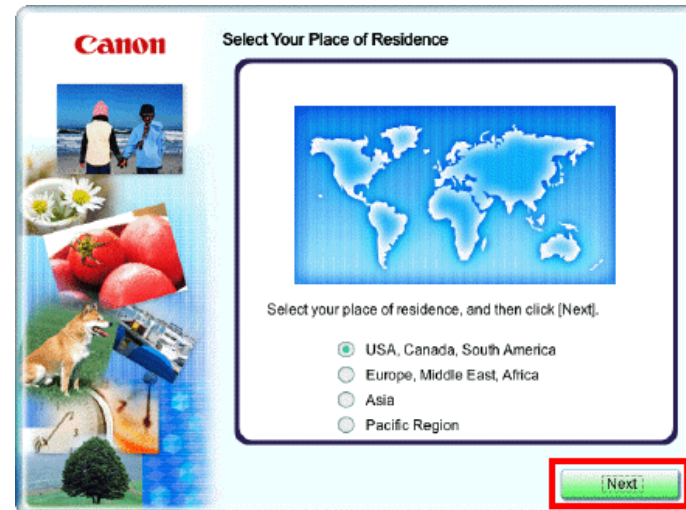



# Downloading and Installing the Drivers


## Step Five

Click **Easy Install**.



## Step Six


Click **Install**.

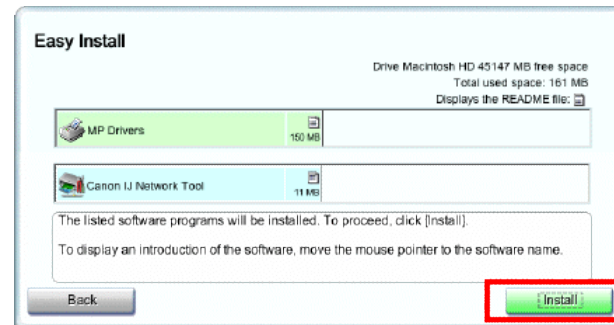

# Downloading and Installing the Drivers


## Step Seven

Select **Use the printer on network**, then click **Next**.

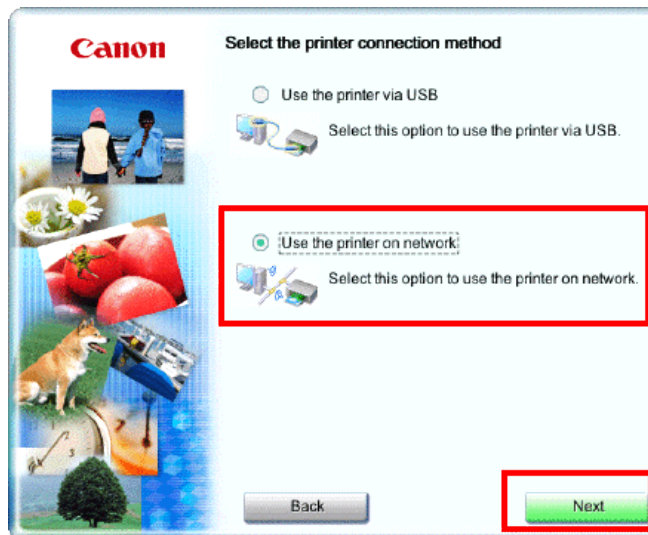

## Step Eight


Read the License Agreement screen carefully and click **Yes**.

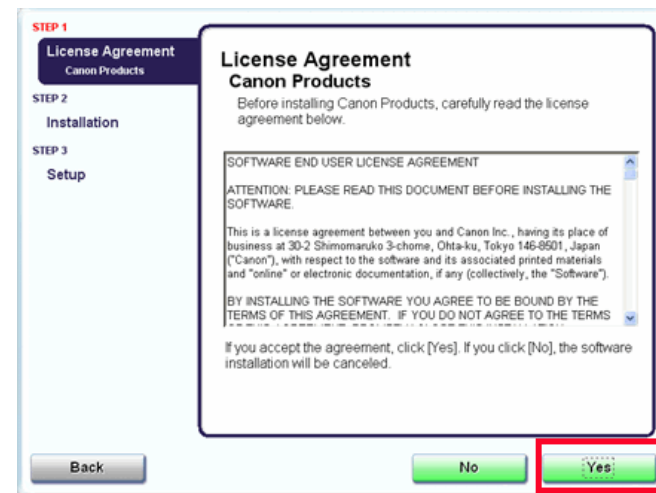

# Downloading and Installing the Drivers

## Step Nine


When the Printer Detection screen appears, click **Next**.

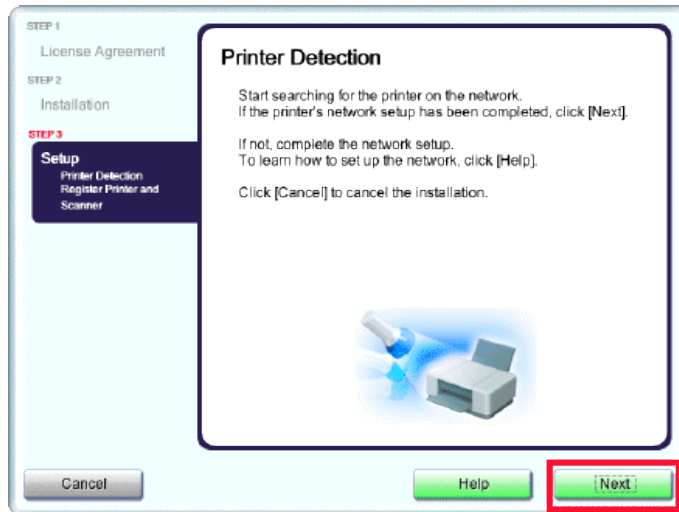

**IMPORTANT:** If the Printer Detection screen is not displayed, the connection method is not correctly selected in step 7. Follow on-screen instructions and proceed with the installation. Click Exit on the installation complete screen, then start again from step 1 and be sure to select **Use the printer** on network in step 7.

## Step Ten

On the Canon IJ Network Tool screen, select MPxxx series in Printers, then click Next. ('xxx' refers to printer model number)

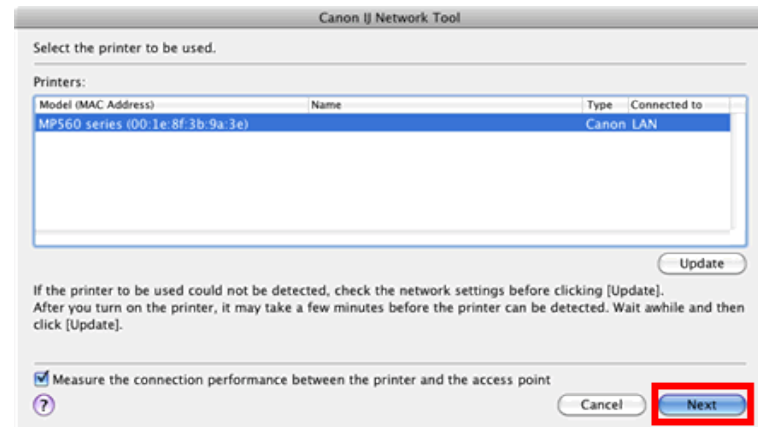


### NOTE:


If the machine is not detected, refer to the printed manual: Network Setup Troubleshooting. Make sure there is no problem, then click Update.

# Downloading and Installing the Drivers

## Step Eleven


When the **Connection Performance Measurement** screen appears, click **Next**. Confirm the measurement results, then click Finish.

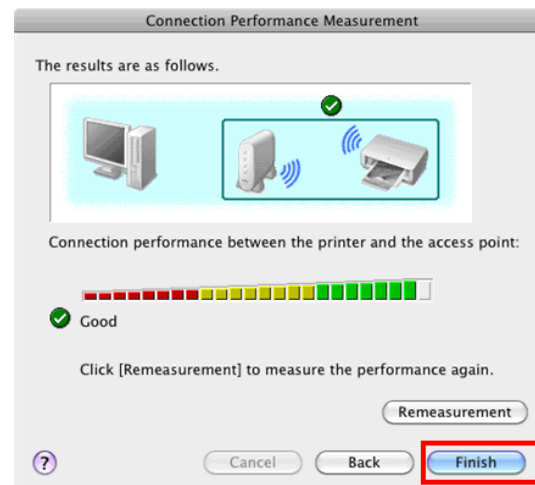

Ensure that  is displayed in Connection performance between the printer and the access point

### NOTE:

You can cancel measuring by clicking **Cancel**. You also examine the detailed status of the communication link after setup.

If an icon other than  appears, improve the communication status by referring to the displayed message or the help file, then click **Remeasurement**.


# Downloading and Installing the Drivers

## Adding the Machine

This section describes how to register the machine on a Macintosh computer.


### Step One

When the **Register Printer and Scanner** screen appears, click **Register Printer**.

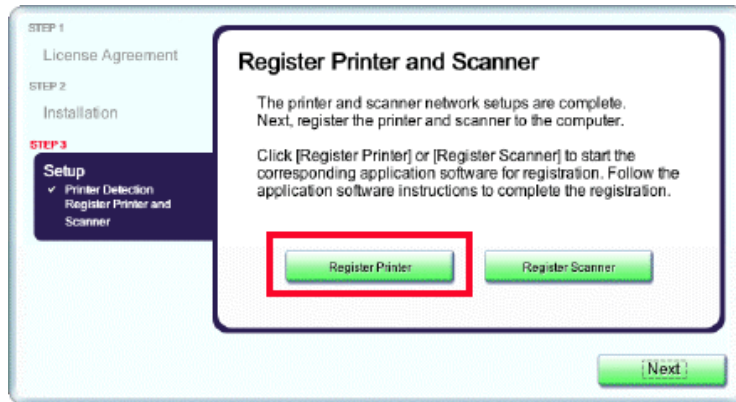

### Step Two

Select **Canon xxxx series** ( 'xxxx' refers to the model) and click **Add**.

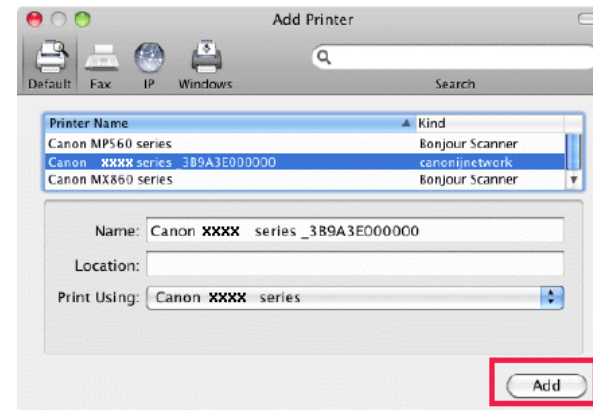


\*The alphanumeric characters after Canon xxxx series is the machine's Bonjour service name or MAC address

# Adding the Machine


## Step Three

When the Register Printer and Scanner screen appears, click **Register Scanner**.

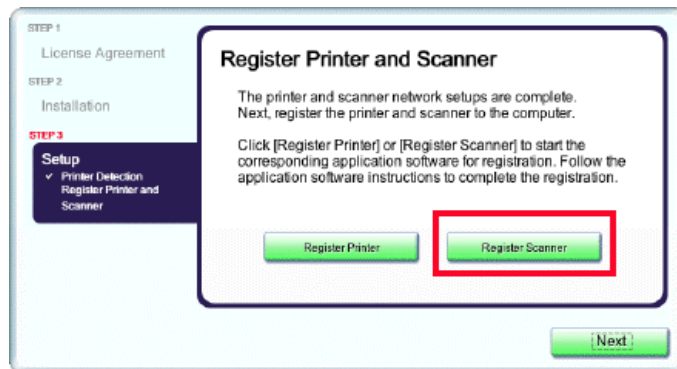

## Step Four


Select **Canon xxxx series** or **xxxx series** ('xxxx' refers to the model) on the Scan-from-PC Settings screen, then click **OK**.

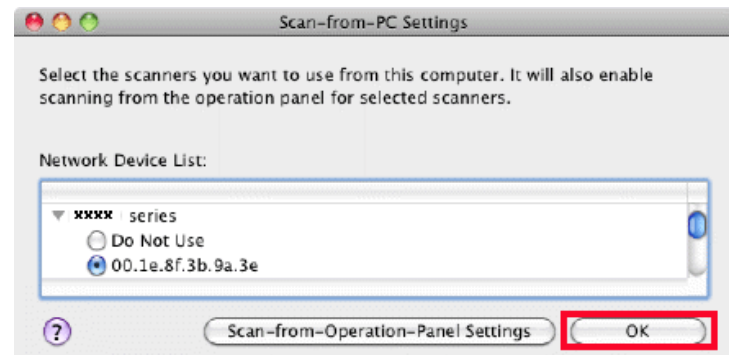

# Adding the Machine

## Step Five

When the Register Printer and Scanner screen appears, click **Next**.

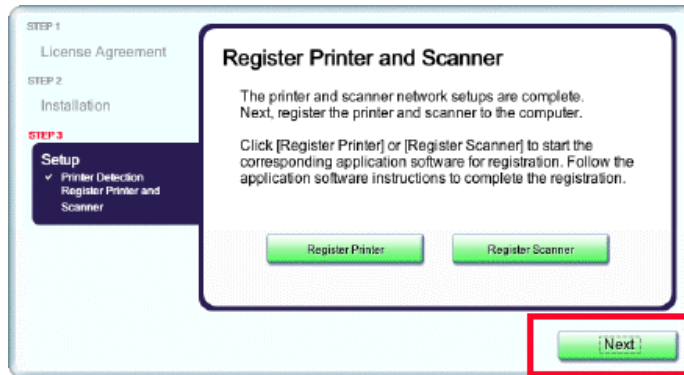

## Step Six

Click **Exit**.

