

# Canon



PRODUCTION SOLUTIONS



imageRUNNER®  
7095 Printer

meap  
POWERED BY

## CHALLENGE YOUR DOCUMENT PRODUCTION STANDARDS

The Canon imageRUNNER 7095 Printer is excellent for print-only environments performing large volumes of transaction and host-based printing. You can configure the system with a choice of print controller options to execute complex workflows and complete long runs with minimal operator involvement. Using a full range of document handling and finishing accessories, professional publishing needs with available in-line perfect bookbinding, saddle-stitched booklet finishing, hole-punching, tab-feeding, and high-capacity stacking can be accomplished.

You can also leverage your imageRUNNER device investment further by using part of the system's vast memory as an on-site document storage and print-on-demand solution. Moreover, you can do this while retaining complete control over device access and data protection with the latest identity management and security measures.

### MAIN UNIT

Type:	Digital Multifunctional Imaging System
Imaging System:	Laser Dry Electrostatic Transfer
Developing System:	Dry Monocomponent Toner Projection
Main Unit CPU:	Dual Canon Custom Processors
Interface Connection:	10/100Base-TX (RJ-45), USB 2.0 High Speed
Image Server Memory:	Standard 1GB RAM + 40GB HDD
Max. Mail Boxes Supported:	100 (Max. Page Capacity: Approximately 20,000 pages)
Halftone:	256-Level Grayscale
Print Speed:	95 cpm (Letter) 49 cpm (11" x 17")
Warm-Up Time:	6 Minutes or Less
Standard Paper Supply:	Dual Front-Loading Drawers (1,500 Sheets each) Dual Front-Loading Cassettes (550 Sheets each) 50-Sheet Stack Bypass
Optional Paper Supply:	3,500-Sheet Paper Deck-W1/X1
Paper Capacity:	Standard: 4,150 Sheets Maximum: 7,650 Sheets
Acceptable Paper Weight:	17 lb. Bond to 110 lb. Index (All Sources)
Power Consumption:	2.15kW
Plug:	NEMA 6-15R
Photoconductor Yield:	6 Million Impressions
Toner Yield:	47,000 Images @ 6% Coverage

### OPTIONAL ACCESSORIES

#### Paper Deck-W1/Paper Deck-X1

Paper Capacity:	3,500 Sheets
Number of Drawers:	1
Acceptable Paper Weight:	17 lb. Bond to 110 lb. Index
Acceptable Paper Size	
Paper Deck-W1:	Letter
Paper Deck-X1:	Letter-R, Letter, Legal, 11" x 17"

#### High-Capacity Stacker-A1\*

Paper Capacity:	6,000 Sheets
Number of Trays:	2 (includes rolling Dolly for moving document stacks)
Tray Capacities	
Top Sample Tray:	1,000 Sheets
Stack Tray:	5,000 Sheets
Acceptable Paper Weight:	17 lb. Bond to 110 lb. Index
Acceptable Paper Size	
Top Sample Tray:	11" x 17", Legal, Letter, Letter-R, Statement-R, Executive
Stack Tray:	11" x 17", Legal, Letter, Letter-R, Executive

#### Finisher-V1/Saddle Finisher-V2

Number of Trays:	2/3
Tray Capacity	
Top Tray:	3,000 Sheets
Lower Tray:	2,000 Sheets
Saddle-Stitch Tray:	30 Booklets or Limitless
Acceptable Paper Weight	
Finisher-V1:	17 lb. Bond to 110 lb. Index
Saddle Finisher-V2:	17 lb. Bond to 110 lb. Index
Acceptable Paper Size:	11" x 17", Legal, Letter, Letter-R, Statement-R, Executive
Staple Positions:	Corner Stapling, Double Stapling
Max. Stapling Capacity:	100 Sheets (Letter, Executive) 50 Sheets (11" x 17", Legal, Letter-R)
Type of Staple:	Staple-N1 (5,000 x 3)

#### Saddle-Stitching (Saddle Finisher-V2 Only)

Acceptable Paper Size:	11" x 17", Legal, Letter-R
Folding Mode:	V-Folding Standard
Stapling Capacity:	20 Sheets (80 Pages)
Type of Staple:	Staple-P1 (5,000 x 2)

#### Professional Puncher-A1 (For Finisher-V1/Saddle Finisher-V2)


Type:	External In-Line Punch Unit
Hole-Punching Method:	Press Punch Unit
Acceptable Punch Paper Weight:	20 lb. Bond to 110 lb. Index
Acceptable Punch Paper Size:	Letter
Punch Speed:	Up to 105 ppm (Depending on speed of main unit)
Punch Patterns (Optional):	Plastic Comb (19-Hole) Twin Loop (32-Hole) Twin Loop (21-Hole) Color Coil (44-Hole) Velo Bind (11-Hole) Loose-leaf Bind (3-Hole) Proclick* (32-Hole)

#### Puncher Unit-V1 (For Finisher-V1/Saddle Finisher-V2)

Type:	Internal Punch Unit
Hole-Punching Method:	Press Punch System
Acceptable Punch Paper Weight:	17 lb. Bond to 110 lb. Index
Acceptable Punch Paper Size	
Two Holes:	Legal, Letter-R
Three Holes:	11" x 17", Letter
Punch Speed:	Up to 105 ppm (Depending on speed of main unit)

#### Document Insertion Unit-C1 (For Finisher-V1/Saddle Finisher-V2)

Number of Trays:	2
Capacity	
Upper Tray:	200 Sheets
Lower Tray:	200 Sheets
Acceptable Paper Weight:	17 lb. Bond to 158 lb. Index
Acceptable Paper Size	
Upper Tray:	Letter, Letter-R, Executive
Lower Tray:	11" x 17", Legal, Letter, Letter-R, Executive

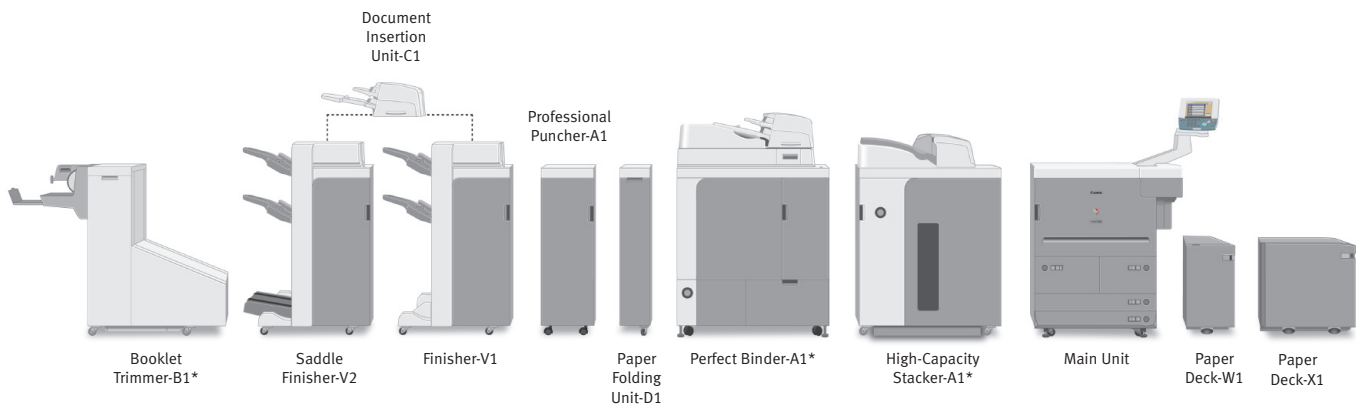

#### Paper Folding Unit-D1 (For Finisher-V1/Saddle Finisher-V2)

Folding Method:	Roller Pressure Folding
Folding Type:	Z-Fold
Acceptable Paper Weight:	17 lb. Bond to 20 lb. Bond
Acceptable Paper Size:	11" x 17"

#### Booklet Trimmer-B1\* (For Saddle Finisher-V2)

Margin Trimming:	Open-End Only
Trim Thickness:	40 Sheets
Waste Tray Capacity:	1,500 Sheets of Trimmed Strip
Acceptable Paper Weight:	17 lb. Bond to 110 lb. Index
Output Tray Capacity:	30 Booklets

### CONNECTIVITY OPTIONS

#### Canon Multi-PDL Printer Kit-H1

Processor:	Dual Canon Custom Processors
Memory:	1 GB – Shared
Storage:	40 GB – Shared
PDL Support:	PCL 5e, PCL 6, PostScript® 3 Emulation, UFR II
Resolution:	1200 x 1200 dpi: UFR II, PostScript 3 Emulation 2400 x 600 dpi: PCL 5e, PCL 6
Interface Connections	
Standard:	10/100Base-TX (RJ-45), USB 2.0 High Speed
Network OS:	Windows® 98/Me/2000/XP Windows NT® 4.0 Windows Server 2003 (TCP/IP) Solaris 1.1x, 2.5x or Later Macintosh® OS 8.0 or Later (PPD) Novell® NetWare® v3.2, 4.1, 4.11, 4.2, 5, 5.1, 6, 6.5 (IPX/SPX)

#### imagePASS-S1 Print Controller

Type:	External Stand-Alone Controller
Processor:	Intel® Celeron® D 2.8GHz
Memory:	256MB
Storage:	80GB HDD
PDL Support:	Adobe® PostScript 3, PCL 5e, PCL 6
Resolution:	1200 x 1200 dpi: PostScript 3 2400 x 600 dpi: PCL 5e, PCL 6
Interface Connections:	Standard: 10Base-T/100Base-TX/ 1000Base-T (RJ-45) (RJ-45), USB 2.0 High Speed
Network OS:	Windows 98/Me/2000/XP Windows Server 2003 (TCP/IP) Solaris 8 or Later Sun OS 4.1.3 or Later Macintosh OS 9.2, OSX (10.2.4) or Later Novell NetWare 4.2, 5.1, 6.5 (IPX/SPX)

#### Other Accessories

- Cassette-AB1
- Tab Feeding Attachment-A1
- Document Tray-L1
- Braille Label Kit-A1
- Control Card Reader-D1
- Control Card Sets
- Web Access Software-C1
- Remote Operator's Software Kit-A1
- Security Expansion Board-F1
- Expansion Bus-D1
- imageRUNNER Security Kit-A2
- Secure Watermark Kit-A1
- Barcode Printing Kit-A1
- Finisher Option Power Supply Unit-R1
- Stacker Dolly-A1
- Perfect Binder-A1\*
- Punch Tools
- Hot Folder for imagePASS-S1
- Impose for imagePASS-S1

\* Check with your Authorized Canon Dealer for availability.

NOTE: Some accessories require additional equipment or may be prerequisites for other options. Check with your local Authorized Canon Dealer for details.

### Device Dimensions and Power Requirements Chart

Product/Accessory Name	Dimensions (H x W x D)	Weight	Power
Main Unit	58" x 47-7/8" x 30-7/8" (1474mm x 1216mm x 783mm)	551 lb. (250kg)	208V, 60Hz, 12A
Paper Deck-W1	22-1/2" x 12-3/4" x 23" (570mm x 323mm x 583mm)	90.4 lb. (41kg)	Directly From Main Unit
Paper Deck-X1	22-5/8" x 23-3/8" x 24-1/2" (574.5mm x 593mm x 621mm)	101 lb. (46kg)	
High-Capacity Stacker-A1	50-4/5" x 33-9/10" x 30-1/5" (1290mm x 860mm x 765mm)	440 lb. (200kg)	120V, 10A
Perfect Binder-A1	53-1/2" x 36-1/5" x 30-4/5" (1360mm x 920mm x 783mm)	714 lb. (324kg)	208V, 15A
Finisher-V1	46-1/2" x 31-1/2" x 31-1/4" (1180mm x 800mm x 792mm)	278 lb. (126kg)	Directly From Main Unit* or 208V, 60Hz, 12A**
Saddle Finisher-V2	46-1/2" x 31-1/2" x 31-1/4" (1180mm x 800mm x 792mm)	392 lb. (178kg)	
Document Insertion Unit-C1	8-3/8" x 24-5/8" x 26-1/4" (213mm x 625mm x 667mm)	37.5 lb. (17kg)	From Finisher-V1 or Saddle Finisher-V2
Paper Folding Unit-D1	41" x 7-1/8" x 31" (1040mm x 179mm x 786mm)	97 lb. (44kg)	
Booklet Trimmer-B1	41" x 62-1/10" x 30-2/5" (1040mm x 1575mm x 770mm)	335 lb. (152kg)	
Professional Puncher-A1	38-1/2" x 12" x 28-1/2" (978mm x 305mm x 723mm)	154 lb. (70kg)	

\* When Finisher is equipped with Paper Folding Unit-D1 and/or Document Insertion Unit-C1.

\*\* When Finisher is equipped with Professional Puncher-A1, Booklet Trimmer-B1, High-Capacity Stacker-A1, and/or Perfect Binder-A1.

**Canon**  
image*ANYWARE*

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Windows and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries. Adobe and PostScript are registered trademarks of Adobe Systems Incorporated in the United States and/or other countries. Macintosh is a registered trademark of Apple Computer, Inc. Intel and Celeron are registered trademarks of Intel Corporation. Novell and NetWare are registered trademarks of Novell, Inc. in the United States and other countries. Solaris and Sun are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. EFI and Command WorkStation are registered trademarks and FreeForm is a trademark of Electronics for Imaging, Inc. in the U.S. Patent and Trademark Office and certain other foreign jurisdictions. eCopy ShareScan is a trademark of eCopy, Inc. CANON, IMAGERUNNER and MEAP are registered trademarks, and UNIVERSAL SEND and the GEN-JINE logo are trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. REMOTE UI is a trademark of Canon U.S.A., Inc. IMAGEWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon Inc. in certain countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners. Specifications subject to change without notice.  
©2005 Canon U.S.A., Inc. All rights reserved.

1-800-OK-CANON  
www.usa.canon.com

Canon U.S.A., Inc.  
One Canon Plaza  
Lake Success, NY 11042

